



ANNUAL REPORT

2024 GROUNDWATER MONITORING REPORT

**(INCLUDES THIRD QUARTER 2024
SEMIANNUAL GROUNDWATER
MONITORING REPORT)**

December 2024

Radford Army Ammunition Plant

HAZARDOUS WASTE MANAGEMENT UNITS (HWMUs) 5 AND 16 CALENDAR YEAR 2024

Submitted To:

Virginia Department of Environmental Quality
1111 East Main Street, Suite 1400
Richmond, Virginia 23219

Prepared For:

BAE Systems, Ordnance Systems Inc.
Radford Army Ammunition Plant
Route 114
Radford, Virginia 24141-0100

Prepared By:

TRC, Engineers, Inc.
2200 South Main Street, Suite A
Blacksburg, Virginia 24060

Job No. 547076

Prepared by: Ross Miller, Geologist

Reviewed and approved by: Michael D. Lawless, P.G.



ORGANIZATION OF REPORT

This report is presented in a fully electronic version only. The electronic version of this report is presented in Portable Document Format (PDF; Adobe Systems Inc.) via electronic file transfer only. Depending upon file size (limited to 50 MB per file), the laboratory analytical reports associated with this report may be presented as separate PDF files.

TRC PREPARED THIS DOCUMENT (WHICH MAY INCLUDE DRAWINGS, SPECIFICATIONS, REPORTS, STUDIES AND ATTACHMENTS) IN ACCORDANCE WITH THE AGREEMENT BETWEEN TRC ENGINEERS, INC. (TRC) AND BAE SYSTEMS, ORDNANCE SYSTEMS INC. THE STANDARD OF CARE FOR PROFESSIONAL ENGINEERING, ENVIRONMENTAL AND SURVEYING AND RELATED SERVICES PERFORMED OR FURNISHED BY TRC ENGINEERS, INC. UNDER THIS AGREEMENT IS THE CARE AND SKILL ORDINARILY USED BY MEMBERS OF THESE PROFESSIONS PRACTICING UNDER SIMILAR CIRCUMSTANCES AT THE SAME TIME AND IN THE SAME LOCALITY. TRC ENGINEERS, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, UNDER THIS AGREEMENT IN CONNECTION WITH TRC'S SERVICES. CONCLUSIONS PRESENTED ARE BASED UPON A REVIEW OF AVAILABLE INFORMATION, THE RESULTS OF OUR FIELD STUDIES, AND/OR PROFESSIONAL JUDGMENT. TO THE BEST OF OUR KNOWLEDGE, INFORMATION PROVIDED BY OTHERS IS TRUE AND ACCURATE, UNLESS OTHERWISE NOTED. TRC'S LIABILITY, HEREUNDER, SHALL BE LIMITED TO AMOUNTS DUE TRC FOR SERVICES ACTUALLY RENDERED, OR REIMBURSABLE EXPENSES ACTUALLY INCURRED. ANY REUSE OR MODIFICATION OF ANY OF THE AFOREMENTIONED DOCUMENTS (WHETHER HARD COPIES OR ELECTRONIC TRANSMITTALS) PREPARED BY TRC WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY TRC WILL BE AT THE SOLE RISK OF THE INDIVIDUAL OR ENTITY UTILIZING SAID DOCUMENTS AND SUCH USE IS WITHOUT THE AUTHORIZATION OF TRC ENGINEERS INC. TRC ENGINEERS, INC. SHALL HAVE NO LEGAL LIABILITY RESULTING FROM ANY AND ALL CLAIMS, DAMAGES, LOSSES, AND EXPENSES, INCLUDING ATTORNEY'S FEES ARISING OUT OF THE UNAUTHORIZED REUSE OR MODIFICATION OF THESE DOCUMENTS. CLIENT SHALL INDEMNIFY TRC FROM ANY CLAIMS ARISING OUT OF UNAUTHORIZED USE OR MODIFICATION OF THE DOCUMENTS WHETHER HARD COPY OR ELECTRONIC.

CONCLUSIONS PRESENTED BY TRC DO NOT REFLECT VARIATIONS IN SUBSURFACE GROUNDWATER QUALITY THAT MIGHT EXIST BETWEEN OR BEYOND SAMPLING POINTS OR BETWEEN SPECIFIC SAMPLE COLLECTION EVENTS. TRC SHALL INCUR NO LIABILITY RESULTING FROM INFORMATION SUPPLIED BY OTHERS.

TABLE OF CONTENTS

EXECUTIVE SUMMARY.....	1
HWMU-5	1
HWMU-16	2
1.0 INTRODUCTION	5
1.1 HWMU-5	5
1.2 HWMU-16	6
2.0 HWMU-5 ANNUAL GROUNDWATER MONITORING REPORT.....	7
2.1 WASTE MANAGEMENT UNIT INFORMATION	7
2.2 GROUNDWATER MONITORING PLAN	7
2.3 GROUNDWATER MOVEMENT	7
2.4 GROUNDWATER MONITORING ACTIVITIES	8
2.5 GROUNDWATER ANALYTICAL DATA EVALUATION.....	9
2.5.1 Semiannual Monitoring for Corrective Action Targeted Constituents	9
2.5.2 Annual Monitoring List – Comparison to Groundwater Protection Standards	11
2.5.3 Annual Monitoring List – Verification of Estimated Values.....	11
2.5.4 2024 USEPA Regional Screening Levels (RSLs)	12
2.6 ANNUAL EVALUATION OF EFFECTIVENESS OF CORRECTIVE ACTION.....	12
2.7 RECOMMENDATIONS	13
3.0 HWMU-16 ANNUAL GROUNDWATER MONITORING REPORT.....	14
3.1 WASTE MANAGEMENT UNIT INFORMATION	14
3.2 GROUNDWATER MONITORING PLAN	14
3.3 GROUNDWATER MOVEMENT	14
3.4 GROUNDWATER MONITORING ACTIVITIES	15
3.5 GROUNDWATER ANALYTICAL DATA EVALUATION.....	16
3.5.1 Annual Monitoring – Permit Attachment 1, Appendix I.....	17
3.5.2 Comparison to Groundwater Protection Standards.....	17
3.5.3 Comparison to Background Concentrations.....	18
3.6 RECOMMENDATIONS	20
SIGNATURE/CERTIFICATION	21

LIST OF TABLES

Table 1 HWMU-5 Groundwater Elevations – 2024

Table 2 HWMU-16 Groundwater Elevations – 2024

TABLE OF CONTENTS

LIST OF APPENDICES

Appendix A HWMU-5

- Appendix A-1 HWMU-5 Potentiometric Surface Maps (Second and Third Quarters 2024)
- Appendix A-2 HWMU-5 Year 2024 Laboratory Analytical Results – Groundwater Corrective Action Targeted Constituents – GPS and Semiannual Monitoring List
- Appendix A-3 HWMU-5 Year 2024 Laboratory Analytical Results – Groundwater Corrective Action Annual Monitoring List
- Appendix A-4 HWMU-5 Indicator Parameters – 2024

Appendix B HWMU-16

- Appendix B-1 HWMU-16 Potentiometric Surface Maps (Second and Third Quarters 2024)
- Appendix B-2 HWMU-16 Year 2024 Laboratory Analytical Results – Point of Compliance Wells
- Appendix B-3 HWMU-16 Year 2024 Laboratory Analytical Results – Plume Monitoring Wells
- Appendix B-4 Established Background Values and Computations for HWMU-16
- Appendix B-5 HWMU-16 Indicator Parameters – 2024

Appendix C Laboratory Analytical Results/Validation – Year 2024

Appendix D Field Notes

Appendix E Correspondence

EXECUTIVE SUMMARY

This document presents the Annual Groundwater Monitoring Report for calendar year 2024 for Hazardous Waste Management Units (HWMUs) 5 and 16 located at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia. The Annual Groundwater Monitoring Report was compiled in accordance with the requirements specified in the *Final Hazardous Waste Post-Closure Care Permit for HWMUs 5 and 16* (original effective date October 4, 2002; reissued August 16, 2014, with subsequent Class 1 Permit Modifications). This Annual Groundwater Monitoring Report evaluates the analytical data from Second Quarter 2024 and Third Quarter 2024 for each Unit.

The calendar year 2024 groundwater monitoring events were conducted using revised Permit-specified method detection limits (MDLs) (a.k.a., detection limits (DLs)) and quantitation limits (QLs) as presented in the recent Class 1 Permit Modification approved by the Virginia Department of Environmental Quality (VDEQ) in electronic correspondence dated May 5, 2021. Additionally, total silver was added to the HWMU-16 Compliance Monitoring List following detection during Third Quarter 2023 as directed by VDEQ in correspondence dated May 8, 2024. HWMU-16 total cobalt data were evaluated using the revised alternate source demonstration (ASD) for total cobalt in groundwater at HWMU-16 approved by the VDEQ in electronic correspondence dated September 13, 2021. A Unit-specific summary for the Second and Third Quarter 2024 semiannual groundwater monitoring events is provided below.

RFAAP submitted the Permit renewal application for HWMUs 5 and 16 in February 2024; VDEQ review of the Permit renewal application remains pending.

HWMU-5

HWMU-5 has been in corrective action (CA) since 2010. Semiannual CA groundwater monitoring events for HWMU-5 were conducted in accordance with Permit Module VI – *Groundwater Corrective Action & Monitoring Program for Unit 5*. Semiannual monitoring was conducted during Second and Third Quarter 2024.

Trichloroethene (TCE) was not detected at concentrations greater than the groundwater protection standard (GPS) of 5 ug/l during calendar year 2024. TCE was detected at concentrations greater than the Permit-specified QL of 1 ug/l but less than the GPS of 5 ug/l during the semiannual monitoring events in point of compliance wells 5WC22 and 5WC23 (Second and Third Quarter 2024) and 5WC21 (Third Quarter 2024 only). TCE was not detected at concentrations greater than the Permit-specified QL in any other wells comprising the CA monitoring network during the calendar year 2024

monitoring events. Additionally, no TCE daughter products were detected in any wells comprising the CA groundwater monitoring network for HWMU-5.

Total cobalt was detected at concentrations greater than the GPS of 7 ug/l in point of compliance well 5WC21 during Second and Third Quarters 2024 and at 5WC22 during Second Quarter 2024 only. Total cobalt was not detected at concentrations greater than the GPS in any other wells comprising the CA monitoring network during the calendar year 2024 monitoring events.

Overall, evaluation of calendar year 2024 data for the CA Targeted Constituents and comparison with historical data indicates effective progress of groundwater CA through natural attenuation. TCE remedial endpoints have been achieved. No changes to the continuation of the groundwater CA program are anticipated at this time. Semiannual groundwater monitoring will continue at HWMU-5, with the next monitoring event scheduled for Second Quarter 2025.

The current CA groundwater monitoring program is required to continue until the TCE concentrations have remained below the GPS for a period of three consecutive years; upon which the Permittee may request to end corrective action. However, although TCE concentrations in groundwater at the Unit have been less than the GPS for over three consecutive years, total cobalt (listed in Appendix J to Permit Attachment 2 – *Groundwater Corrective Action Targeted Constituents - GPS and Semiannual Monitoring List for HWMU-5*) remains above the GPS in point of compliance wells 5WC21 and 5WC22. As a result, continued CA groundwater monitoring is required as stated in Permit Condition VI.B.4.c.

As stated in the Permit, the compliance period for HWMU-5 was scheduled to end October 28, 2020, and the 30-year post closure care period was scheduled to end on October 26, 2019. However, even though the TCE remedial endpoints have been achieved for over three consecutive years, the Permit requires the Unit to continue CA past the scheduled end of the compliance period and the post-closure care period due to the continued detection of total cobalt at concentrations greater than the GPS.

HWMU-16

Semiannual Compliance groundwater monitoring for HWMU-16 was conducted during Second and Third Quarter 2024. On October 26, 2018, VDEQ authorized the comparison of total cobalt results in HWMU-16 point of compliance wells to the latest VDEQ alternate concentration limit (ACL; 6 ug/l during calendar year 2024) in addition to the Permit-specified GPS of 5 ug/l. During Second and Third Quarter 2024, total cobalt was detected at a concentration greater than the GPS in point of compliance well

16WC1A. During Third Quarter 2024, total cobalt was detected at a concentration greater than the GPS in point of compliance well 16MW9. During Second and Third Quarter 2024, total cobalt was detected at a concentration greater than the VDEQ ACL in point of compliance well 16WC1A only. Total cobalt was not detected at concentrations greater than the GPS or latest VDEQ ACL in the other wells comprising the compliance monitoring network. Additionally, the total cobalt data were evaluated using the revised ASD for total cobalt in groundwater at HWMU-16 for point of compliance wells 16MW9, 16WC1A, and 16WC1B approved by the VDEQ in electronic correspondence dated September 13, 2021. Based on the conclusions of the VDEQ-approved ASD, calendar year 2024 total cobalt concentrations detected in point of compliance wells 16MW9 and 16WC1A appear to be consistent with natural variation in local groundwater and are not indicative of a release from the Unit. Based on the VDEQ correspondence dated September 13, 2021, a separate ASD will not be required. No other constituents were detected in the upgradient well or in the point of compliance wells at concentrations greater than their respective GPS during Second or Third Quarter 2024.

Evaluation of the plume monitoring well data indicated that total barium concentrations greater than the site-specific background concentration were detected in plume monitoring wells 16-2, 16-3 and in spring sampling location 16SPRING during Second Quarter and Third Quarter 2024. Higher total barium concentrations in downgradient plume monitoring wells relative to background are likely due to natural variations in trace element distribution in groundwater. Upgradient well 16C1 is screened in limestone while downgradient plume monitoring wells 16-2, 16-3, and 16-5 are screened in shale and fault breccia. Such differing lithologic formations would be expected to contain very different trace element distributions. Similar barium concentrations were observed in the point of compliance wells. Therefore, no further action regarding the calendar year 2024 total barium concentrations detected in plume monitoring wells 16-2, 16-3 and in spring sampling location 16SPRING is recommended at this time.

The Third Quarter 2024 event also served as the annual monitoring event in which the upgradient and point of compliance wells at HWMU-16 were sampled for the 40 CFR Part 264 Appendix IX constituents listed in Permit Attachment 1, Appendix I. No 40 CFR Part 264 Appendix IX constituents (as listed in Appendix I of Permit Attachment 1) were detected at concentrations greater than their respective Permit MDLs.

As stated in Permit Condition I.K.2, the compliance period during which the GPS applies to HWMU-16 is 13 years, beginning on the effective date of the original Final Permit and continuing until October 4, 2015, or until directed by VDEQ. Additionally,

the 30-year post closure care period for HWMU-16 was scheduled to end on August 10, 2023.

No changes to the continuation of the groundwater program are anticipated at this time. Semiannual groundwater monitoring will continue at HWMU-16, with the next monitoring event scheduled for Second Quarter 2025.

1.0 INTRODUCTION

This document presents the Annual Groundwater Monitoring Report for calendar year 2024 for Hazardous Waste Management Units (HWMUs) 5 and 16 located at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia. The Annual Groundwater Monitoring Report was compiled in accordance with the requirements specified in the *Final Hazardous Waste Post-Closure Care Permit for HWMUs 5 and 16* (Final Permit; original effective date October 4, 2002; reissued August 16, 2014; revised in VDEQ-approved Class 1 Permit Modifications dated September 12, 2014, December 1, 2016, and May 5, 2021). Calendar year 2024 groundwater monitoring events were conducted using revised detection limits (DLs) and quantitation limits (QLs) as approved by the Virginia Department of Environmental Quality (VDEQ) in electronic correspondence dated May 5, 2021. As well, total silver was added to the HWMU-16 Compliance Monitoring List Third Quarter 2023 as directed by VDEQ in correspondence dated May 8, 2024.

The Annual Groundwater Monitoring Report presents the following set of information for each Unit: basic information and unit identification, a description of the groundwater monitoring plan, a discussion of groundwater movement, potentiometric surface maps, a table of groundwater elevations, and evaluations of the analytical data.

The groundwater samples collected at HWMUs 5 and 16 during the Second and Third Quarter 2024 semiannual monitoring events were evaluated in accordance with the reissued Final Permit dated August 16, 2014, and applicable permit modifications.

RFAAP submitted the Permit renewal application for HWMUs 5 and 16 in February 2024; VDEQ review of the Permit renewal application remains pending.

1.1 HWMU-5

HWMU-5 is a closed lined neutralization pond. The Unit received certification for closure in 1989. As stated in Permit Condition I.K.1, the Compliance Period during which the GPS applies to HWMU-5 is 19 years, beginning on the effective date of the original Post-Closure Care Permit for HWMU-5 (October 28, 2001) and continuing until October 28, 2020, or until directed by VDEQ. The Second Quarter 2010 groundwater monitoring event served as the first semiannual Corrective Action (CA) groundwater monitoring event for HWMU-5 conducted in accordance with Permit Module VI – *Groundwater Corrective Action & Monitoring Program for Unit 5*.

1.2 HWMU-16

HWMU-16 is a closed hazardous waste landfill. The Unit received closure certification in 1993. As stated in Permit Condition I.K.2, the Compliance Period during which the Groundwater Protection Standard applies to HWMU-16 is 13 years, beginning on the original effective date of the Permit (October 4, 2002) and continuing until October 4, 2015, or until directed by VDEQ.

2.0 HWMU-5 ANNUAL GROUNDWATER MONITORING REPORT

2.1 Waste Management Unit Information

Unit Name: Hazardous Waste Management Unit 5 (HWMU-5)
Owner/Operator: United States Army/BAE Systems, Ordnance Systems Inc.

Unit Location: RFAAP Main Plant Area, Radford, Virginia

Class: Hazardous Waste Management Unit
Type: Closed Lined Neutralization Pond

2.2 Groundwater Monitoring Plan

Monitoring Network:

Upgradient Well: 5W8B
Point of Compliance Wells: 5W5B, 5W7B, 5WC21, 5WC22, 5WC23
Plume Monitoring Wells: 5W12A
Observation Wells: S5W5, S5W7, 5W9A, 5W10A, 5W11A, 5WCA, S5W6, S5W8, 5WC11, 5WC12

Monitoring Status: Corrective Action Monitoring Program

Calendar Year (CY) Monitoring Events:

Second Quarter 2024: May 8, 2024
June 5, 2024 (resampled 5WC23 – volatile organics constituents only)
Third Quarter 2024: July 23, 2024

HWMU-5 has been in corrective action (CA) since 2010. The calendar year 2024 groundwater monitoring events were conducted in accordance with Permit Module VI – *Groundwater Corrective Action & Monitoring Program for Unit 5*. Semiannual monitoring was conducted during Second and Third Quarter 2024.

2.3 Groundwater Movement

The monitoring wells at HWMU-5 are screened entirely within either weathered carbonate bedrock residuum or alluvium or across the weathered residuum/carbonate bedrock interface. The static water level measurements gathered during the 2024 semiannual monitoring events are summarized in **Table 1**. The maximum groundwater

elevation fluctuation of 1.71 feet was observed at observation well 5WCA; a minimum groundwater elevation fluctuation of 0.05 feet was observed at point of compliance wells 5WC21 and 5W7B. On average, the groundwater elevation at Unit 5 fluctuated 0.32 feet, which is less than the expected annual fluctuation (2 to 5 feet) discussed in the Permit. As shown on the HWMU-5 Potentiometric Surface Maps (**Appendix A-1**), groundwater movement beneath the site is generally to the north/northeast.

Darcian flow conditions were assumed for the alluvium, residuum, and carbonate bedrock beneath HWMU-5. As a result, the groundwater velocities were calculated by multiplying the hydraulic conductivity (determined from previously conducted slug tests) by the average hydraulic gradient across the site and dividing by an assumed effective porosity for the aquifer. The average hydraulic gradient was determined by superimposing three evenly spaced flow line vectors over the potentiometric surface map, measuring their lengths, calculating the head differential over the distances measured, and dividing the head differential by the length of the flow line vectors. The three calculated gradients were then averaged to a single value. Using this method, the average groundwater hydraulic gradient across the site based on Third Quarter 2024 groundwater elevations was calculated to be 0.0276 ft/ft. Historical slug test data for the site yielded an average hydraulic conductivity of 5.25×10^{-5} ft/second. This value is consistent with literature values for carbonate rock and for clayey, silty sand and gravel alluvium and residuum (Domenico and Schwartz, 1990).

The estimated groundwater velocity across the site was calculated to be approximately 2.51 ft/day or 916 ft/year based on the following:

- Average hydraulic conductivity of 5.25×10^{-5} ft/second.
- Average hydraulic gradient of 0.0276 ft/ft.
- Assumed effective porosity of 0.05, based on a representative range of porosities for carbonate rock, weathered residuum, and clayey, silty sand and gravel alluvium (Domenico and Schwartz, 1990).

The actual groundwater flow velocities in the carbonate bedrock may vary as much as one to two orders of magnitude from the velocity presented above depending on water level conditions and the distribution of solution features.

2.4 Groundwater Monitoring Activities

During Second Quarter 2024 and Third Quarter 2024, all of the wells in the CA groundwater monitoring network were sampled for the constituents listed in Appendix J to Permit Attachment 2 (*Groundwater Corrective Action Targeted Constituents - GPS and*

Semiannual Monitoring List for HWMU-5). The Second Quarter 2024 event also served as the annual monitoring event in which the point of compliance wells at HWMU-5 were sampled for the constituents listed in Appendix K to Permit Attachment 2 (*Groundwater Corrective Action Annual Monitoring List*). The calendar year 2024 groundwater monitoring events were conducted using revised DLs and QLs approved by the VDEQ in electronic correspondence dated May 5, 2021.

Additional Activities:

For Second Quarter 2024, data validation for volatile organic constituent results indicated that point of compliance well 5WC23 was analyzed outside the technical holding time. Therefore, RFAAP resampled point of compliance well 5WC23 for all volatile organic constituents on June 5, 2024. Final laboratory results were received on June 11, 2024.

2.5 Groundwater Analytical Data Evaluation

The laboratory analytical results for the 2024 monitoring events are summarized in **Appendix A-2** (Groundwater Corrective Action Targeted Constituents - GPS and Semiannual Monitoring List) and in **Appendix A-3** (Groundwater Corrective Action Annual Monitoring List). Field measurements for indicator parameters are summarized in **Appendix A-4**. The complete laboratory certificates of analysis for the 2024 monitoring events are included in **Appendix C**. Results were reported by an accredited laboratory under the Virginia Environmental Laboratory Accreditation Program (VELAP) for the analytes, methods and matrix as reported on the certificate of analysis; a copy of the laboratory VELAP accreditation certificate is presented in **Appendix C**. The analytical data were validated in accordance with SW-846, *USEPA Contract Laboratory Program National Functional Guidelines for Organic Data Review*, and *USEPA Contract Laboratory Program National Functional Guidelines for Inorganic Data Review*; data validation reports for HWMU-5 are included in **Appendix C**. Copies of field notes recorded during sample collection are included in **Appendix D**. Copies of correspondence relating to groundwater monitoring activities conducted at HWMU-5 during calendar year 2024 are included in **Appendix E**.

2.5.1 Semiannual Monitoring for Corrective Action Targeted Constituents

During the Second Quarter 2024 and Third Quarter 2024 monitoring events, groundwater samples collected from all of the wells in the CA groundwater monitoring network were analyzed for the CA Targeted Constituents listed in Appendix J to Permit Attachment 2. The CA Targeted Constituents consist of TCE and its daughter products: 1,1-dichloroethene (1,1-DCE), *cis*-1,2-dichloroethene (cDCE), *trans*-1,2-dichloroethene

(tDCE), and vinyl chloride (VC). In addition, the VDEQ added total cobalt to the list of CA Targeted Constituents during a meeting with RFAAP on May 4, 2011. The laboratory analytical results for the CA Targeted Constituents are summarized in **Appendix A-2**. For constituents listed in Appendix J, the laboratory reported QLs and DLs were at or below the respective permit QL or DL presented in the Class 1 Permit Modification and approved May 5, 2021.

During Second Quarter 2024, TCE was detected in point of compliance wells 5WC22 and 5WC23 at concentrations of 1.2 ug/l and 1.7 ug/l (June 5, 2024 resampling event), respectively, which are less than the Groundwater Protection Standard (GPS) of 5 ug/l (**Appendix A-2**). TCE was detected in point of compliance well 5WC21 at a concentration less than the QL of 1 ug/l. TCE was not detected in any of the other wells in the CA groundwater monitoring network. Additionally, the TCE daughter products were not detected in any of the wells comprising the CA groundwater monitoring network.

During Third Quarter 2024, TCE was detected in point of compliance wells 5WC21, 5WC22 and 5WC23 at concentrations of 1.1 ug/l, 1.1 ug/l and 1.3 ug/l, respectively, which are less than the GPS of 5 ug/l (**Appendix A-2**). TCE was not detected in any of the other wells in the CA groundwater monitoring network. Additionally, the TCE daughter products were not detected in any of the wells comprising the CA groundwater monitoring network.

During Second Quarter 2024, total cobalt was detected in point of compliance wells 5WC21 and 5WC22 at concentrations of 21 ug/l and 11 ug/l, respectively, which are greater than the Unit-specific GPS of 7 ug/l. Total cobalt was detected in point of compliance wells 5W7B and 5WC23 at estimated concentrations less than the QL of 5 ug/l but greater than the DL of 1 ug/l (**Appendix A-2**). Total cobalt was not detected at concentrations greater than the GPS in the other wells comprising the CA monitoring network during Second Quarter 2024.

During Third Quarter 2024, total cobalt was detected in point of compliance well 5WC21 at a concentration of 22 ug/l which is greater than the Unit-specific GPS of 7 ug/l. Total cobalt was detected in point of compliance well 5WC22 at a concentration of 5.6 ug/l which is greater than the QL of 5 ug/l but less than the Unit-specific GPS. Total cobalt was detected in point of compliance well 5W7B at an estimated concentration less than the QL of 5 ug/l but greater than the DL of 1 ug/l (**Appendix A-2**). Total cobalt was not detected at concentrations greater than the GPS in the other wells comprising the CA monitoring network during Third Quarter 2024.

2.5.2 Annual Monitoring List – Comparison to Groundwater Protection Standards

During Second Quarter 2024, groundwater samples collected from the point of compliance wells for HWMU-5 were analyzed for the constituents listed in Appendix K to Permit Attachment 2 (*Groundwater Corrective Action Annual Monitoring List*; revised in Class 1 Permit Modification approved by VDEQ on May 5, 2021). Appendix K constituents are based on the Compliance Monitoring List, plus those constituents historically detected. Annual monitoring for the constituents listed in Appendix K is required in order to evaluate whether additional hazardous constituents that are not the targets for the current CA (e.g., TCE and its daughter products, total cobalt) are present at concentrations greater than their respective GPS for the Unit. No additional hazardous constituents that are not targets for the current CA for the Unit were detected at concentrations greater than their respective GPS during Second Quarter 2024 (**Appendix A-3**).

The Second Quarter 2024 annual groundwater monitoring event was conducted using QLs and DLs presented in the Class 1 Permit Modification approved by the VDEQ in electronic correspondence dated May 5, 2021. For all constituents, the laboratory QL was less than the respective GPS.

2.5.3 Annual Monitoring List – Verification of Estimated Values

A footnote presented in Appendix K to Permit Attachment 2 indicates that verification is required for constituents detected at concentrations less than the QL if their associated GPSs are 1) based on background values equal to the QL, and 2) are greater than the applicable risk-based concentrations (i.e., VDEQ Alternate Concentration Limit (ACL) or USEPA Regional Screening Level (RSL)). In these instances, verification must be conducted using an alternate low-level analytical method in order to confirm or refute the observed initial detections if the QL achievable by that method is less than, or equal to, the ACL or RSL for the subject constituent. If a concentration greater than the low-level analytical method QL is observed above the ACL or RSL, then a revised background concentration will be established using the low-level analytical method, if appropriate, and the GPS for that constituent will be updated, if warranted. This applies to p-nitroaniline and nitrobenzene only.

During Second Quarter 2024, p-nitroaniline and nitrobenzene were not detected and no additional action was required.

2.5.4 2024 USEPA Regional Screening Levels (RSLs)

The USEPA periodically updates the RSLs (formerly known as RBCs). As stated in section VI.E.3 of Module VI of the Final Permit, "The Permittee shall use the most up-to-date USEPA MCL, the Department ACL, or EPA Region 3 RBC as the GPS. If USEPA implements any changes to MCLs or RBCs, the GPS defined by that MCL or RBC will be updated to reflect the most current value established by USEPA."

At the time of the Second Quarter 2024 groundwater monitoring event, the May 2024 USEPA RSL table reflected the most current RSL values. According to the May 2024 USEPA RSL table, the tapwater RSL for diethyl ether (CAS Number 60-29-7) was 3,900 ug/l (target hazard quotient (THQ)=1.0, target risk (TR)=1E-06); the Permit-specified GPS for diethyl ether listed in Appendix K to Permit Attachment 2 is based on a previous RSL of 7,300 ug/l. The GPS comparison value for diethyl ether listed in Appendix A-2 of this report is the Permit-specified GPS of 7,300 ug/l; however, RFAAP also compared diethyl ether concentrations detected during Second Quarter 2024 to the current (as of November 2024) USEPA RSL of 3,900 ug/l. Diethyl ether is the only constituent listed in Appendix K to Permit Attachment 2 whose GPS is based on a previous USEPA RSL that has been updated subsequent to the Permit reissuance date of August 16, 2014.

During Second Quarter 2024, diethyl ether was not detected at or above the laboratory QL of 10 ug/l. Diethyl ether was detected below the QL in point of compliance well 5WC23 at an estimated concentration of 3.8 ug/l. The detected diethyl ether estimated concentration is less than the GPS listed in Appendix K to Permit Attachment 2 (7,300 ug/l) as well as the current USEPA RSL of 3,900 ug/l. Diethyl ether was not detected in any other wells comprising the CA groundwater monitoring network.

2.6 Annual Evaluation of Effectiveness of Corrective Action

In accordance with Sections VI.B.6, VI.J.4.f and VI.J.4.g and other applicable sections of the Final Permit, RFAAP is required to perform an annual evaluation of the effectiveness of the Corrective Action Program (CAP) (monitored natural attenuation [MNA] program) for calendar year 2024. MNA is the current remedial measure implemented at the Unit to address TCE in groundwater at concentrations greater than the GPS.

As stated in the 2014-2023 Annual Groundwater Monitoring Reports for the Unit (2023 Annual Report approved in VDEQ correspondence dated May 8, 2024; **Appendix E**), TCE remedial endpoints have been achieved. During Second Quarter 2024 and Third

Quarter 2024, TCE was not detected at concentrations greater than its GPS in any of the wells comprising the CA groundwater monitoring network for HWMU-5. Additionally, no daughter products of TCE were detected in any of the wells comprising the CA groundwater monitoring network for HWMU-5; therefore, TCE remedial objectives continue to be met. In accordance with the Final Permit, calculation of the predicted MNA remedial timeframe is not applicable since TCE data remained below the GPS during the calendar year 2024 monitoring events.

Total cobalt was detected at a concentration greater than the GPS of 7 ug/l in point of compliance wells 5WC21 and 5WC22 during Second Quarter 2024 and in point of compliance well 5WC21 only during Third Quarter 2024. Total cobalt was not detected at concentrations greater than the GPS in the other wells comprising the CA monitoring network during the calendar year 2024 monitoring events.

2.7 Recommendations

TCE concentrations at HWMU-5 remained below the GPS throughout calendar year 2024 indicating achievement of TCE remedial endpoints. The current monitoring program is required to continue until the TCE concentrations have remained below the GPS for a period of three consecutive years, upon which time the Permittee may request to end corrective action. However, although TCE concentrations in groundwater at the Unit have been less than the GPS for over three consecutive years, total cobalt remains above the GPS in point of compliance wells 5WC21 and 5WC22. Therefore, continued CA groundwater monitoring is required as stated in Permit Condition VI.B.4.c.

As stated in the Permit, the compliance period for HWMU-5 was scheduled to end October 28, 2020, and the 30-year post closure care period was scheduled to end on October 26, 2019. However, even though the TCE remedial endpoints have been achieved for over three consecutive years, the Permit requires the Unit to continue CA past the scheduled end of the compliance period and the post-closure care period due to the continued detection of total cobalt at concentrations greater than the GPS. In 2023, RFAAP prepared and submitted an Alternate Source Demonstration (ASD) for total cobalt at HWMU-5. In correspondence dated April 3, 2024, the VDEQ indicated that the total cobalt ASD was not approved, and the Facility is required to continue the CA Program for total cobalt at HWMU-5.

No changes to the continuation of the groundwater CA program are anticipated at this time. Semiannual groundwater monitoring will continue at HWMU-5. The next monitoring event is scheduled for Second Quarter 2025.

3.0 HWMU-16 ANNUAL GROUNDWATER MONITORING REPORT

3.1 Waste Management Unit Information

Unit Name: Hazardous Waste Management Unit 16 (HWMU-16)
Owner/Operator: United States Army/BAE Systems, Ordnance Systems Inc.

Unit Location: RFAAP Main Plant Area, Radford, Virginia

Class: Hazardous Waste Management Unit
Type: Closed Hazardous Waste Landfill

3.2 Groundwater Monitoring Plan

Monitoring Network:

Upgradient Well: 16C1
Point of Compliance Wells: 16WC1A, 16WC1B, 16MW8, 16MW9
Plume Monitoring Wells: 16-2, 16-3, 16-5, 16WC2B, 16SPRING
Observation Wells: 16-1, 16WC2A, 16C3, 16CDH3

Monitoring Status: Compliance Monitoring Program

CY 2024 Monitoring Events:

Second Quarter 2024: May 7, 2024
Third Quarter 2024: July 30-31, 2024

The calendar year 2024 groundwater monitoring events for HWMU-16 were conducted in accordance with Permit Module V – *Groundwater Compliance Monitoring*. Semiannual monitoring was conducted during Second and Third Quarters 2024.

3.3 Groundwater Movement

The monitoring wells at HWMU-16 are screened entirely within either carbonate bedrock or weathered carbonate bedrock residuum, or across the residuum/bedrock interface. The static water level measurements gathered during the 2024 semiannual monitoring events are summarized in **Table 2**. The maximum groundwater elevation fluctuation of 3.46 feet was observed at observation well 16-1; the minimum groundwater elevation fluctuation of 0.01 feet was observed at plume monitoring well 16-2. On average, the groundwater elevation at Unit 16 fluctuated 1.1 feet, which is less than the range of expected annual fluctuation (2 to 4 feet) discussed in the Permit. As

shown on the HWMU-16 Potentiometric Surface Maps (**Appendix B-1**), groundwater movement beneath the site is generally to the northeast.

Darcian flow conditions were assumed for the weathered residuum and carbonate bedrock beneath HWMU-16. As a result, the groundwater velocities were calculated by multiplying the hydraulic conductivity (determined from previously conducted slug tests) by the average hydraulic gradient across the site and dividing by an assumed effective porosity for the aquifer materials. The average hydraulic gradient was determined by superimposing three evenly spaced flow line vectors over the potentiometric surface map, measuring their lengths, calculating the head differential over the distances measured, and dividing the head differential by the length of the flow line vectors. The three calculated gradients were then averaged to a single value. Using this method, the average groundwater hydraulic gradient across the site based on Third Quarter 2024 groundwater elevations was calculated to be 0.0891 ft/ft. Historical slug test data for the site yielded an average hydraulic conductivity of 7.87×10^{-5} ft/second. This value is consistent with literature values for carbonate rock and for clay and silt residuum (Domenico and Schwartz, 1990).

The estimated groundwater velocity across the site was calculated to be approximately 12.12 ft/day or 4,424 ft/year based on the following:

- Average hydraulic conductivity of 7.87×10^{-5} ft/second.
- Average hydraulic gradient of 0.0891 ft/ft.
- Assumed effective porosity of 0.05, based on a representative range of porosities for carbonate rock and clay and silt residuum (Domenico and Schwartz, 1990).

The actual groundwater flow velocities in the carbonate bedrock may vary as much as one to two orders of magnitude from the velocity presented above depending on water level conditions and the distribution of solution features.

3.4 Groundwater Monitoring Activities

The groundwater samples collected from the compliance monitoring network during the 2024 semiannual monitoring events were analyzed for the constituents listed in Permit Attachment 3, Appendix E – *Groundwater Compliance Monitoring (Semiannual) Constituent List*. In addition, during Third Quarter 2024 groundwater samples were collected from the upgradient well and the point of compliance wells for annual monitoring for the constituents listed in Permit Attachment 1, Appendix I – *Annual Groundwater Sampling Constituent List (Appendix IX 40 CFR Part 264)*. The calendar year

2024 groundwater monitoring events were conducted using revised DLs and QLs as presented in the Class 1 Permit Modification approved by the VDEQ in electronic correspondence dated May 5, 2021. Additionally, total silver was added to the HWMU-16 Compliance Monitoring List Third Quarter 2023 as directed by VDEQ in correspondence dated May 8, 2024. HWMU-16 total cobalt data were evaluated using the revised ASD for total cobalt in groundwater at HWMU-16 approved by the VDEQ in electronic correspondence dated September 13, 2021.

Additional Activities:

On October 18, 2023, TRC on behalf of BAE, conducted a verification event as part of routine groundwater monitoring services at HWMU 16. During the event, TRC field personnel observed that the dedicated bladder pump in point of compliance well 16WC1B was malfunctioning. TRC field personnel subsequently pulled the pump in well 16WC1B to diagnose the nature of the malfunction. TRC field personnel determined that the bladder in the pump was compromised. The manufacturer of the pump is no longer in existence; therefore, a replacement bladder could not be obtained, and the pump required replacement.

Pending purchase and installation of the new pump, point of compliance well 16WC1B was sampled using a new disposable bailer during the Second and Third Quarter 2024 groundwater monitoring events. The new replacement pump was installed in December 2024 and a summary of the pump specifications and installation activities is presented in Appendix E.

3.5 Groundwater Analytical Data Evaluation

The laboratory analytical results for the 2024 monitoring events are included in Appendix B-2 (point of compliance wells) and in **Appendix B-3** (plume monitoring wells). The established background values and the computations used to determine the background values are included in **Appendix B-4**. Field measurements for indicator parameters are summarized in **Appendix B-5**. The complete laboratory certificates of analysis for the 2024 monitoring events are included in **Appendix C**. Results were reported by an accredited laboratory under the VELAP for the analytes, methods and matrix as reported on the certificate of analysis; a copy of the laboratory VELAP accreditation certificate is presented in **Appendix C**. The analytical data were validated in accordance with SW-846, *USEPA Contract Laboratory Program National Functional Guidelines for Organic Data Review*, and *USEPA Contract Laboratory Program National Functional Guidelines for Inorganic Data Review*; data validation reports for HWMU-16 are included in **Appendix C**. Copies of field notes recorded during sample collection are included in **Appendix D**. Copies of correspondence relating to groundwater monitoring

activities conducted at HWMU-16 during calendar year 2024 are included in **Appendix E**.

3.5.1 Annual Monitoring – Permit Attachment 1, Appendix I

During the Third Quarter 2024 monitoring event, groundwater samples were collected from the upgradient well and the point of compliance wells for annual monitoring for the constituents listed in Permit Attachment 1, Appendix I – *Annual Groundwater Sampling Constituent List (Appendix IX 40 CFR Part 264)*.

Four laboratories were utilized to complete the Annual Appendix IX groundwater monitoring event. The *final revised* laboratory analytical data packages for this event were received on August 29, 2024. The laboratory DLs and QLs met the Permit-specified MDLs and QLs.

No Appendix IX constituents were initially detected at estimated concentrations greater than their respective Permit DLs at HWMU-16 during the Third Quarter 2024 groundwater monitoring event and no additional action was required.

3.5.2 Comparison to Groundwater Protection Standards

As specified in the Final Permit, the calendar year 2024 groundwater analytical data for the upgradient well and the point of compliance wells were compared to the GPS for HWMU-16 listed in Appendix G of Permit Attachment 3 (modified to add 1,1-dichloroethene in Class 1 Permit Modification approved September 12, 2014; modified to add tetrahydrofuran in Class 1 Permit Modification approved December 1, 2016; modified to add vinyl chloride in Class 1 Permit Modification approved May 5, 2021; and modified to add total silver during the Permit renewal application process as directed by the VDEQ in correspondence dated May 8, 2024). In accordance with Permit Condition V.I.2, RFAAP performed a simple empirical comparison of the upgradient well and the point of compliance well data to the GPS (**Appendix B-2**).

During Second and Third Quarter 2024, total cobalt was detected at a concentration greater than the GPS in point of compliance well 16WC1A. During Third Quarter 2024, total cobalt was detected at a concentration greater than the GPS in point of compliance well 16MW9. As directed by the VDEQ in electronic correspondence dated October 26, 2018, RFAAP also compared the detected total cobalt concentrations to the latest (effective January 1, 2024) VDEQ ACL for cobalt of 6 ug/l. Additionally, the total cobalt data were evaluated using the revised ASD for total cobalt in groundwater at HWMU-16 for point of compliance wells 16MW9, 16WC1A, and 16WC1B approved by the VDEQ in electronic correspondence dated September 13, 2021. Based on the

conclusions of the VDEQ-approved ASD, the calendar year 2024 total cobalt concentrations detected in point of compliance wells 16MW9 and 16WC1A appear to be consistent with natural variation in local groundwater and are not indicative of a release from the Unit. A verification event was not conducted for calendar year 2024 total cobalt concentrations detected in point of compliance wells 16MW9 and 16WC1A. As well, based on VDEQ correspondence dated September 13, 2021, a separate ASD will not be required.

Total cobalt was not detected at concentrations greater than the Permit-specified GPS or the latest VDEQ ACL in the other wells comprising the compliance monitoring network during the calendar year 2024 monitoring events.

No other constituents were detected in the upgradient well or in the point of compliance wells at concentrations greater than their respective GPS during Second and Third Quarter 2024.

A footnote presented in Appendix G of Permit Attachment 3 (*Groundwater Protection Standards: Unit 16*) indicates that verification is required for constituents detected at concentrations less than the QL if their associated GPS are equal to the QL and are greater than the applicable risk-based concentrations (i.e., ACL or RSL). In these instances, verification must be conducted using an alternate low-level analytical method in order to confirm or refute the observed initial detections if the QL achievable by that method is less than, or equal to, the ACL or RSL for the subject constituent. If a concentration greater than the low-level analytical method QL is observed, then the GPS for that constituent will be updated, if warranted. During Second Quarter 2024 and Third Quarter 2024, no constituents with GPS equal to their respective QLs and greater than the applicable risk-based concentrations were detected at concentrations less than their respective QLs; therefore, no further action was warranted. This applied to 2,4-dinitrotoluene and 2,6-dinitrotoluene.

3.5.3 Comparison to Background Concentrations

As specified in Permit Condition V.O, the calendar year 2024 groundwater analytical data for the plume monitoring wells were compared to the background concentrations for HWMU-16 listed in Appendix F of Permit Attachment 3. In accordance with Permit Condition V.I.2, RFAAP performed a simple empirical comparison of the plume monitoring well data to the background concentrations (**Appendix B-3**).

As shown in **Appendix B-3**, total barium was detected at concentrations greater than the site-specific background concentration of 175.4 ug/l in plume monitoring wells

16-2, 16-3 and in spring sampling location 16SPRING during Second Quarter and Third Quarter 2024. All total barium concentrations detected in the plume monitoring locations were well below the USEPA MCL for barium of 2,000 ug/l. Higher total barium concentrations in downgradient plume monitoring wells relative to background may be the result of natural variations in trace element distribution in groundwater. As illustrated in the boring logs for the compliance network monitoring wells (Appendix H of Permit Attachment 5), upgradient well 16C1 is screened in limestone while downgradient plume monitoring wells 16-2, 16-3, and 16-5 are screened in shale and fault breccia. Such differing lithologic formations would be expected to contain different trace element distributions. In correspondence dated May 9, 2022, VDEQ acknowledged the presence of barium above the site-specific background concentration due to lithology. However, VDEQ may request further investigation if total barium levels in groundwater increase in the future. No further action regarding calendar year 2024 total barium concentrations detected in plume monitoring wells above the site-specific background concentration is recommended at this time.

No other constituent concentrations detected in the plume monitoring wells were greater than their respective background concentration or applicable Permit-specified QL, as listed in Permit Appendix G to Attachment 3. In accordance with the requirements of Permit Condition V.K.3, the established background values and the computations used to determine the background values are included in **Appendix B-4**.

3.6 Recommendations

No further action regarding the 2024 total barium concentrations detected in plume monitoring wells 16-2, 16-3, and in spring sampling location 16SPRING is recommended at this time.

No further action regarding the 2024 total cobalt concentrations detected in point of compliance wells 16MW9 and 16WC1A is recommended at this time based on the recently approved total cobalt ASD.

As stated in Permit Condition I.K.2, the compliance period during which the GPS applies to HWMU-16 is 13 years, beginning on the effective date of the original Final Permit (October 4, 2002) and continuing until October 4, 2015, or until directed by VDEQ. Additionally, the 30-year post closure care period for HWMU-16 was scheduled to end on August 10, 2023. RFAAP submitted the Permit renewal application for HWMUs 5 and 16 in February 2024; VDEQ review of the Permit renewal application remains pending.

No changes to the continuation of the groundwater program are anticipated at this time. Semiannual groundwater monitoring will continue at HWMU-16, with the next monitoring event scheduled for Second Quarter 2025.

SIGNATURE/CERTIFICATION

Prepared by:

Name: _____ Ross G. Miller; Senior Project Geologist _____

Signature: _____  _____

Company: _____ TRC Engineers, Inc. _____

Address: _____ 2200 South Main Street, Suite A _____

City/State/Zip: _____ Blacksburg, Virginia 24060-6600 _____

Prepared by:

Name: _____ Will Mason-Deese Project Geologist _____

Signature: _____  _____

Company: _____ TRC Engineers, Inc. _____

Address: _____ 2200 South Main Street, Suite A _____

City/State/Zip: _____ Blacksburg, Virginia 24060-6600 _____

Virginia Professional Certification:

I certify that I have prepared or supervised preparation of the attached report, that it has been prepared in accordance with industry standards and practices, and that the information contained herein is truthful and accurate to the best of my knowledge.

Name: _____ Michael D. Lawless, Principal Geologist _____

Signature: _____  _____

Virginia Professional Certification Type and Number: _____ PG 832 _____

Company: _____ TRC Engineers, Inc. _____

Address: _____ 2200 South Main Street, Suite A _____

City/State/Zip: _____ Blacksburg, Virginia 24060-6600 _____

TABLES



TABLE 1
HWMU-5
GROUNDWATER ELEVATIONS - 2024
RADFORD ARMY AMMUNITION PLANT
RADFORD, VIRGINIA

MONITORING WELL ID	ELEVATION TOP OF WELL	MAY 8, 2024		JULY 23, 2024	
		DTW	GW ELEV	DTW	GW ELEV
5W8B	1789.58	14.23	1775.35	14.05	1775.53
5W5B	1775.13	9.26	1765.87	9.19	1765.94
5W7B	1774.78	9.37	1765.41	9.32	1765.46
5WC21	1774.43	9.45	1764.98	9.40	1765.03
5WC22	1774.45	9.42	1765.03	9.31	1765.14
5WC23	1773.84	8.82	1765.02	8.62	1765.22
5W12A	1772.46	11.31	1761.15	11.58	1760.88
S5W5	1772.31	8.52	1763.79	8.41	1763.90
S5W7	1776.08	11.17	1764.91	11.09	1764.99
5W9A	1762.20	1.15	1761.05	1.72	1760.48
5W10A	1771.40	13.15	1758.25	13.80	1757.60
5W11A	1766.20	11.36	1754.84	11.64	1754.56
5WC11	1788.92	15.05	1773.87	14.62	1774.30
5WC12	1788.96	15.47	1773.49	15.11	1773.85
5WCA	1779.05	11.32	1767.73	13.03	1766.02
S5W6	1771.43	7.14	1764.29	7.03	1764.40
S5W8	1783.68	11.74	1771.94	11.52	1772.16

NOTES:

DTW: Depth to water from top of casing.

GW ELEV: Groundwater elevation.

All elevations in feet above mean sea level.



TABLE 2
HWMU-16
GROUNDWATER ELEVATIONS - 2024
RADFORD ARMY AMMUNITION PLANT
RADFORD, VIRGINIA

MONITORING WELL ID	ELEVATION TOP OF WELL	MAY 7, 2024		JULY 30, 2024	
		DTW	GW ELEV	DTW	GW ELEV
16C1	1840.14	48.23	1791.91	48.91	1791.23
16MW8	1815.82	73.27	1742.55	73.91	1741.91
16MW9	1808.88	64.73	1744.15	66.1	1742.78
16WC1A	1812.61	67.51	1745.10	69.75	1742.86
16WC1B	1812.95	68.33	1744.62	69.35	1743.6
16-1	1815.82	50.15	1765.67	46.69	1769.13
16-2	1810.99	55.82	1755.17	55.83	1755.16
16-3	1824.77	56.72	1768.05	56.62	1768.15
16-5	1742.60	4.91	1737.69	4.7	1737.9
16WC2B	1818.71	53.51	1765.20	54.34	1764.37
16WC2A	1820.05	DRY	DRY	DRY	DRY
16C3	1822.22	68.98	1753.24	67.54	1754.68
16CDH3	1825.60	DRY	DRY	DRY	DRY
SPRING	na	na	na	na	na

NOTES:

DTW: Depth to water from top of casing.

GW ELEV: Groundwater elevation.

All elevations in feet above mean sea level.



na: Not applicable.

APPENDIX A

HWMU-5

NOTES:

1. Topographic Contour Interval 2'.
2. Two-foot contours derived from 2017 LiDAR: U.S. Geological Survey 20210629, USGS 1 Meter 17 x53&54y412 VA_FEMA NRCS_SouthCentral_2017_D17.

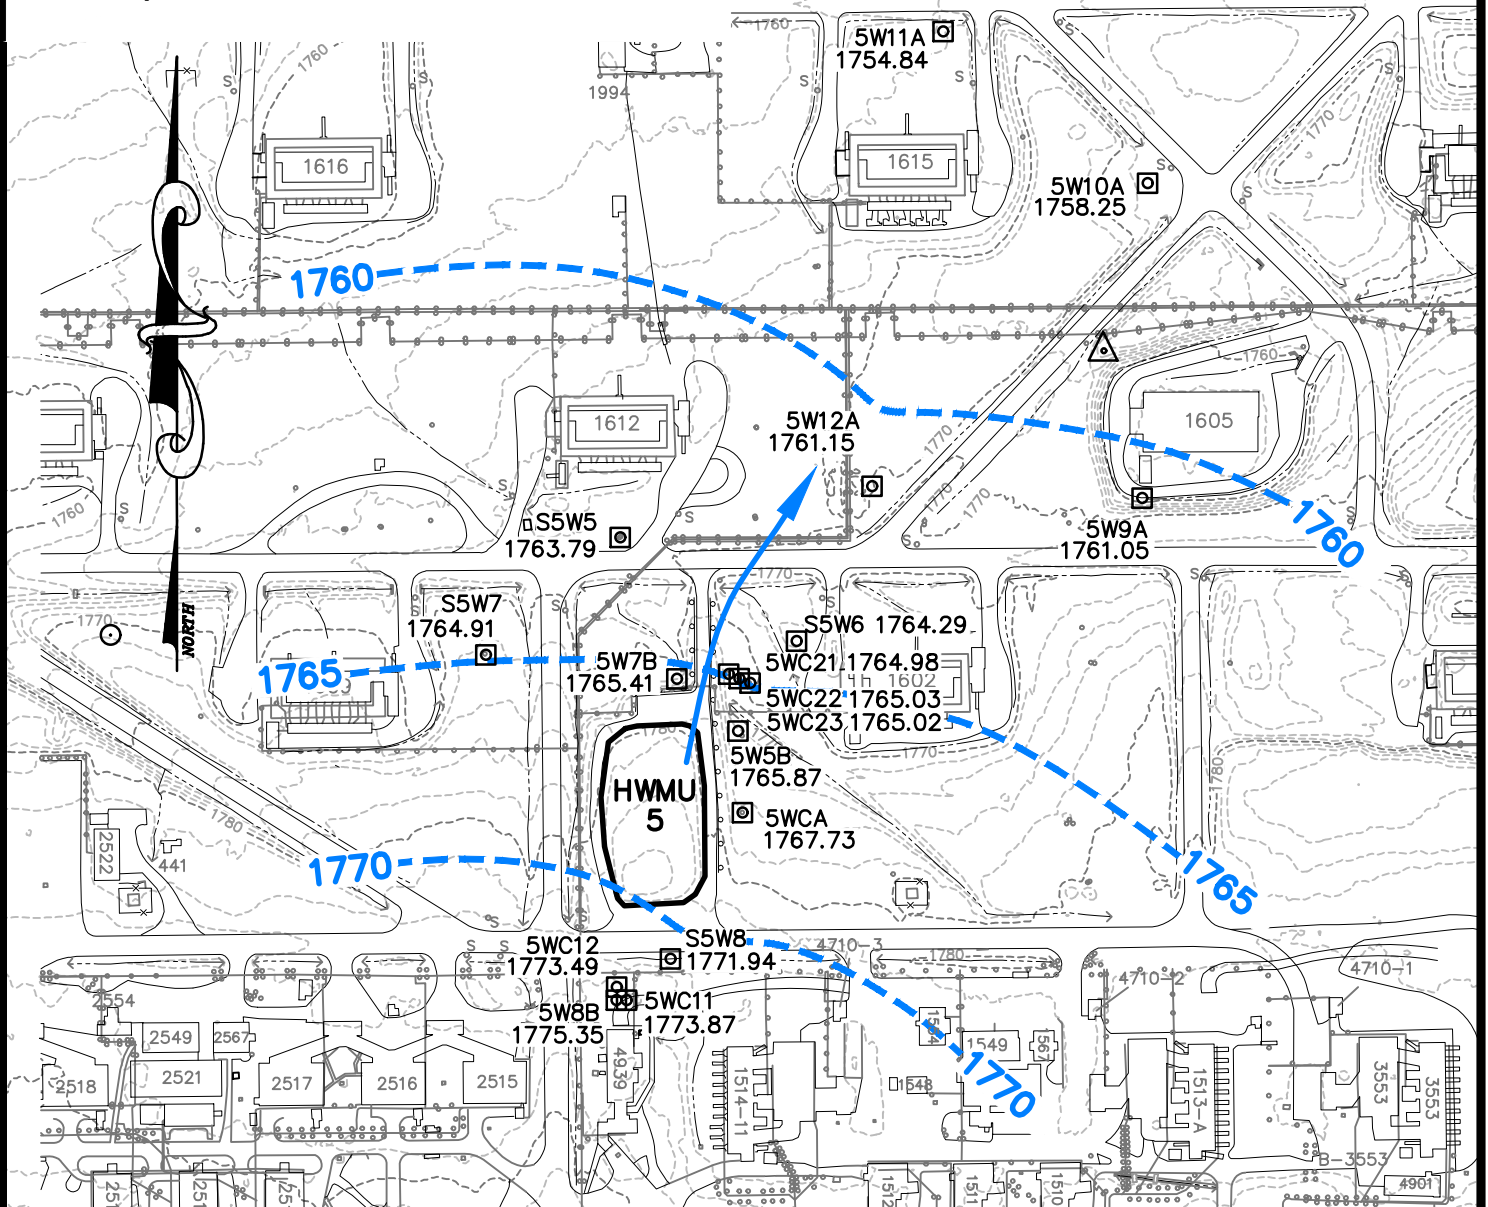

LEGEND	
5W7B □ 1765.41	MONITORING WELL
	GROUNDWATER ELEVATION (feet above mean sea level)
--1770--	GROUNDWATER CONTOUR
→	GROUNDWATER FLOW DIRECTION

HWMU-5 POTENTIOMETRIC SURFACE MAP (May 08, 2024)
RADFORD ARMY AMMUNITION PLANT
RADFORD, VIRGINIA

SCALE: 1"=200'
PLAN NO. 547076



2200 South Main Street, Suite A
Blacksburg, VA 24060
540-552-0444


DESIGNED
DRAWN
CHECKED
DATE

WMD
DLD
MDL
07/25/2024

FIGURE
1a

NOTES:

1. Topographic Contour Interval 2'.
2. Two-foot contours derived from 2017 LiDAR: U.S. Geological Survey 20210629, USGS 1 Meter 17 x53&54y412 VA_FEMA NRCS_SouthCentral_2017_D17.

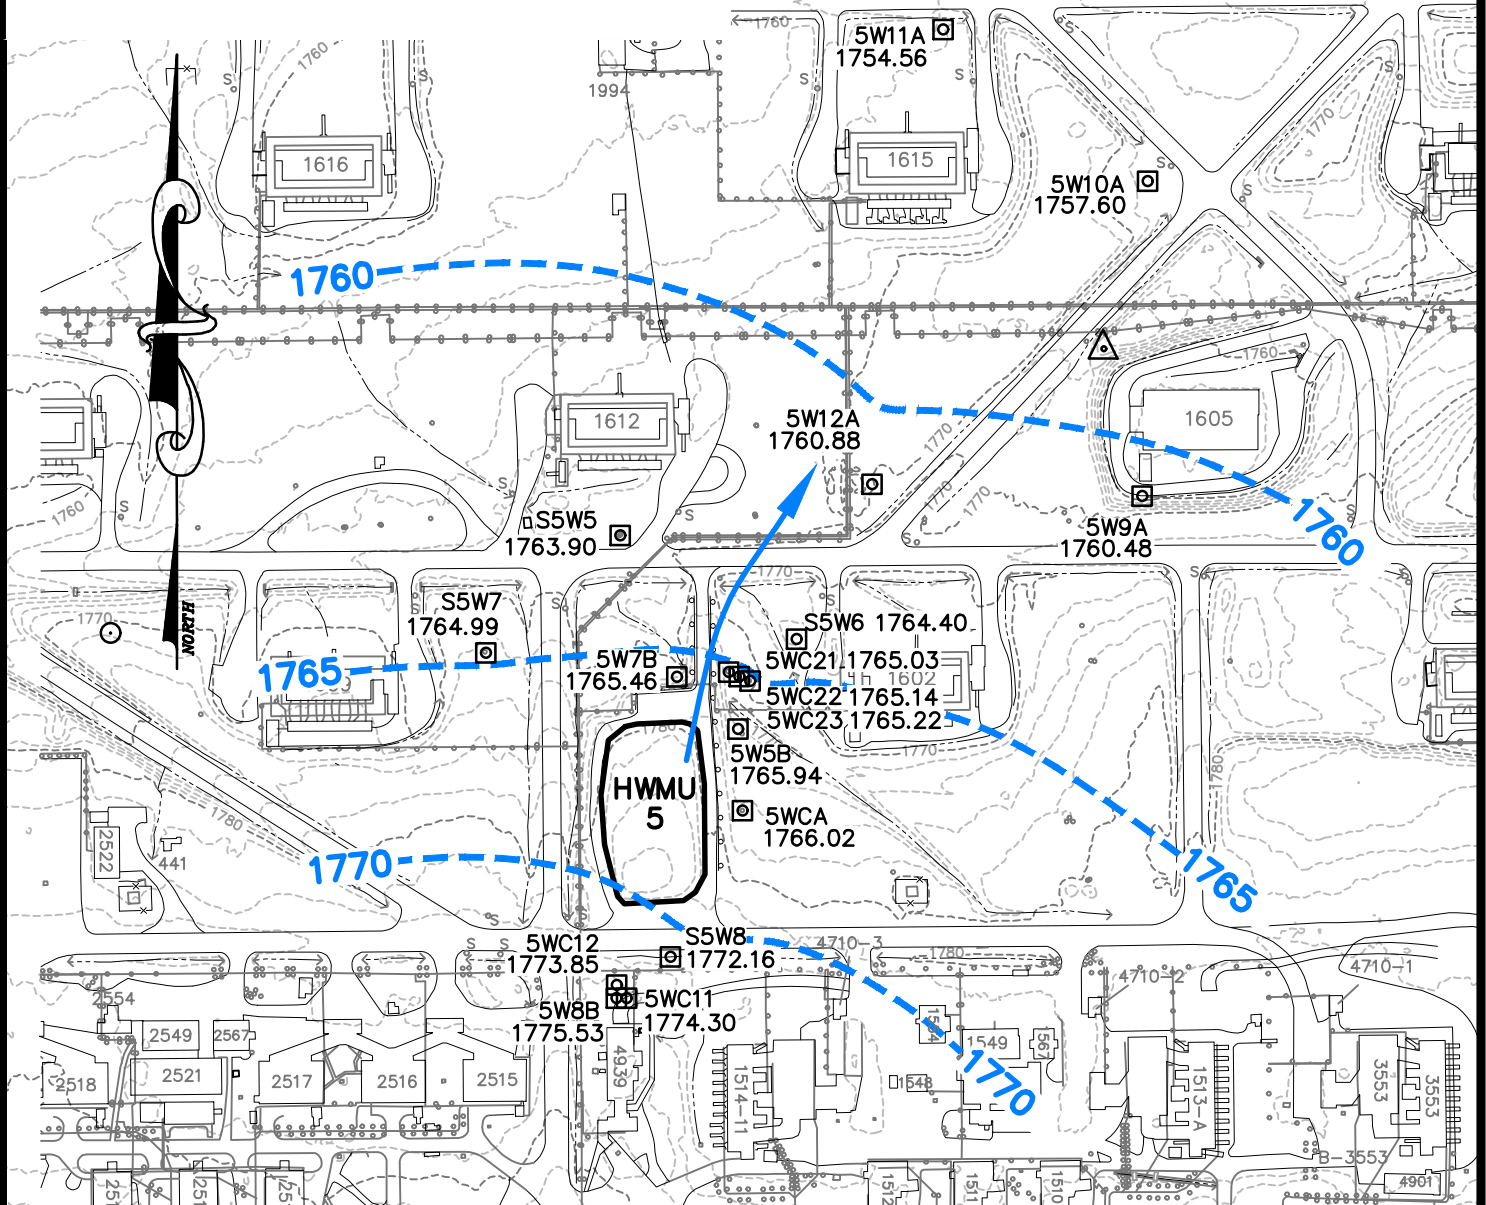

GRAPHIC SCALE



(IN FEET)
1 inch = 200 ft.

LEGEND

- 5W7B □ 1765.46 MONITORING WELL
- GROUNDWATER ELEVATION (feet above mean sea level)
- 1770-- GROUNDWATER CONTOUR
- GROUNDWATER FLOW DIRECTION

HWMU-5 POTENTIOMETRIC SURFACE MAP (July 23, 2024)
RADFORD ARMY AMMUNITION PLANT
RADFORD, VIRGINIA

SCALE: 1"=200'

PLAN NO. 547076



2200 South Main Street, Suite A
Blacksburg, VA 24060
540-552-0444

DESIGNED
DRAWN
CHECKED
DATE

BM
DLD
MDL
12/02/2024

FIGURE
1b

Summary of Semiannual Target Analyte Monitoring Results Appendix J
Corrective Action Monitoring Plan - Targeted Constituents

Hazardous Waste Management Unit 5
Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 5W8B

Analyte/Quarter	5W8B Q	5W5B Q	5W7B Q	5WC21 Q	5WC22 Q	5WC23 Q	5W12A Q	QL	Permit QL	GPS	DL	Permit DL	UNIT	Method
Cobalt CAS # 7440-48-4														
Second Quarter 2024	U	U	2.3 J	21	11	1.2 J	U	5	5	7	1	1	ug/L	6020B
Third Quarter 2024	U	U	2.3 J	22	5.6	U	U	5	5	7	1	1	ug/L	6020B
1,1-Dichloroethene CAS # 75-35-4														
Second Quarter 2024	U	U	U	U	U	U R	U	1	1	7	0.2	0.2	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	-	1	1	7	0.2	0.2	ug/L	8260D
Third Quarter 2024	U	U	U	U	U	U	U	1	1	7	0.2	0.2	ug/L	8260D
cis-1,2-Dichloroethene CAS # 156-59-2														
Second Quarter 2024	U	U	U	U	U	U R	U	1	1	70	0.1	0.1	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	-	1	1	70	0.1	0.1	ug/L	8260D
Third Quarter 2024	U	U	U	U	U	U	U	1	1	70	0.1	0.1	ug/L	8260D
trans-1,2-Dichloroethene CAS # 156-60-5														
Second Quarter 2024	U	U	U	U	U	U R	U	1	1	100	0.8	0.8	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	-	1	1	100	0.8	0.8	ug/L	8260D
Third Quarter 2024	U	U	U	U	U	U	U	1	1	100	0.8	0.8	ug/L	8260D
Trichloroethene CAS # 79-01-6														
Second Quarter 2024	U	U	U	0.81 J	1.2	1.5 J	U	1	1	5	0.3	0.3	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	1.7	-	1	1	5	0.3	0.3	ug/L	8260D
Third Quarter 2024	U	U	U	1.1	1.1	1.3	U	1	1	5	0.3	0.3	ug/L	8260D
Vinyl chloride CAS # 75-01-4														
Second Quarter 2024	U J	U J	U J	U J	U J	U R	U J	1	1	2	0.2	0.2	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	-	1	1	2	0.2	0.2	ug/L	8260D
Third Quarter 2024	U	U	U	U	U	U	U	1	1	2	0.2	0.2	ug/L	8260D

See last page of this report for definitions.

Page 1 of 2



***Summary of Semiannual Target Analyte Monitoring Results Appendix J
Corrective Action Monitoring Plan - Targeted Constituents***

***Hazardous Waste Management Unit 5
Radford Army Ammunition Plant, Radford, Virginia***

Upgradient well = 5W8B

<i>Analyte/Quarter</i>	<i>5W8B Q</i>	<i>5W5B Q</i>	<i>5W7B Q</i>	<i>5WC21 Q</i>	<i>5WC22 Q</i>	<i>5WC23 Q</i>	<i>5W12A Q</i>	<i>QL</i>	<i>Permit QL</i>	<i>GPS</i>	<i>DL</i>	<i>Permit DL</i>	<i>UNIT</i>	<i>Method</i>
Definitions: <i>Results are reported to the permit detection limit. All metals reported as Total, unless specifically noted as dissolved.</i> QL Denotes laboratory quantitation limit. Permit QL Denotes permit quantitation limit. Class 1 Permit Mod approved May 5, 2021 DL Denotes laboratory detection limit. Permit DL Denotes permit detection limit. Class 1 Permit Mod approved May 5, 2021 U denotes not detected at or above the permit detection limit or QL. UA denotes not detected at or above the adjusted detection limit or adjusted QL. J Denotes result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above the detection limit or QL and detection limit and QL are estimated. When used with "UA" (i.e., "UAJ"), denotes analyte not detected at or above adjusted detection limit and adjusted detection limit and QL are estimated. UN Denotes analyte concentration is less than the QL and/or five times the blank concentration. Not reliably detected due to blank contamination. R Denotes result rejected. Q Denotes data validation qualifier. X Denotes mass spectral confirmation not obtained-result suspect. CAS# Denotes Chemical Abstract Services registration number. GPS Denotes Groundwater Protection Standards (2014) listed in Appendix J of Module VI-Groundwater Corrective Action & Monitoring Program for Unit 5 (approved by the VDEQ in the Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002, reissued August 16, 2014). Dec 2016/May 2021 Class I Permit Mods. The first Corrective Action Monitoring Event occurred Second Quarter 2010. "–" denotes not sampled.														

See last page of this report for definitions.



Summary of Annual Target Analyte Monitoring Results - Appendix K
Corrective Action Monitoring Plan - Targeted Constituents

Hazardous Waste Management Unit 5

Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 5W8B

Analyte/Quarter	5W8B Q	5W5B Q	5W7B Q	5WC21 Q	5WC22 Q	5WC23 Q	QL	Permit QL	GPS	DL	Permit DL	UNIT	Method
Antimony CAS # 7440-36-0													
Second Quarter 2024	-	U	U	U	U	U	2	2	6	0.6	0.6	ug/L	6020B
Arsenic CAS # 7440-38-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	10	2	2	ug/L	6020B
Barium CAS # 7440-39-3													
Second Quarter 2024	-	24	27	15	32	19	10	10	2,000	1.3	1.3	ug/L	6020B
Beryllium CAS # 7440-41-7													
Second Quarter 2024	-	U	U	U	U	U	1	1	4	0.3	0.3	ug/L	6020B
Cadmium CAS # 7440-43-9													
Second Quarter 2024	-	U	U	0.21 J	U	U	1	1	5	0.2	0.2	ug/L	6020B
Chromium CAS # 7440-47-3													
Second Quarter 2024	-	U	1.1 J	1.6 J	U	U	5	5	100	1	1	ug/L	6020B
Cobalt CAS # 7440-48-4													
Second Quarter 2024	U	U	2.3 J	21	11	1.2	5	5	7	1	1	ug/L	6020B
Copper CAS # 7440-50-8													
Second Quarter 2024	-	U	U	U	U	U	5	5	1,300	1.7	1.7	ug/L	6020B
Lead CAS # 7439-92-1													
Second Quarter 2024	-	U	U	U	U	U	3	3	15	1	1	ug/L	6020B
Mercury CAS # 7439-97-6													
Second Quarter 2024	-	U	U	U	U	U	2	2	2	0.2	0.2	ug/L	7470A
Nickel CAS # 7440-02-0													
Second Quarter 2024	-	U	2.3 J	13	4.2 J	U	10	10	300	2	2	ug/L	6020B
Selenium CAS # 7782-49-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	50	3	3	ug/L	6020B
Silver CAS # 7440-22-4													
Second Quarter 2024	-	U	U	U	U	U	2	2	71	0.3	0.3	ug/L	6020B
Thallium CAS # 7440-28-0													
Second Quarter 2024	-	U	U	U	U	U	1	1	2	0.2	0.2	ug/L	6020B
Vanadium CAS # 7440-62-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	63	2.5	2.5	ug/L	6020B
Zinc CAS # 7440-66-6													
Second Quarter 2024	-	U	U	7.5 J	U	U	30	30	4700	7.3	7.3	ug/L	6020B

See last page of this report for definitions.

Page 1 of 4



Summary of Annual Target Analyte Monitoring Results - Appendix K
Corrective Action Monitoring Plan - Targeted Constituents

Hazardous Waste Management Unit 5

Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 5W8B

Analyte/Quarter	5W8B Q	5W5B Q	5W7B Q	5WC21 Q	5WC22 Q	5WC23 Q	QL	Permit QL	GPS	DL	Permit DL	UNIT	Method
Acetone CAS # 67-64-1													
Second Quarter 2024	-	U	U	U	U	U R	10	10	12000	3	3	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	10	10	12000	3	3	ug/L	8260D
bis(2-Ethylhexyl)phthalate CAS # 117-81-7													
Second Quarter 2024	-	U	U	U	U	U	6	6	10	1.5	1.5	ug/L	8270E
2-Butanone CAS # 78-93-3													
Second Quarter 2024	-	U	U	U	U	U R	10	10	4900	1.7	1.7	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	10	10	4900	1.7	1.7	ug/L	8260D
Chloroform CAS # 67-66-3													
Second Quarter 2024	-	0.94 J	U	1.1	0.83 J	0.92 J	1	1	80	0.3	0.3	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	0.98 J	1	1	80	0.3	0.3	ug/L	8260D
Dichlorodifluoromethane CAS # 75-71-8													
Second Quarter 2024	-	U J	U J	U J	U J	U R	1	1	190	0.4	0.4	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	1	1	190	0.4	0.4	ug/L	8260D
1,2-Dichloroethane CAS # 107-06-2													
Second Quarter 2024	-	U	U	U	U	U R	1	1	5	0.3	0.3	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	1	1	5	0.3	0.3	ug/L	8260D
Diethyl ether CAS # 60-29-7													
Second Quarter 2024	-	U	U	U	U	1.6 J	10	12.5	7,300	1.1	1.11	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	3.8 J	10	12.5	7,300	1.1	1.11	ug/L	8260D
Diethyl phthalate CAS # 84-66-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	11000	2	2	ug/L	8270E
2,4-Dinitrotoluene CAS # 121-14-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	10	2.1	2.1	ug/L	8270E
2,6-Dinitrotoluene CAS # 606-20-2													
Second Quarter 2024	-	U	U	U	U	U	10	10	10	2.1	2.1	ug/L	8270E
Methylene chloride CAS # 75-09-2													
Second Quarter 2024	-	U	U	U	U	U R	1	1	5	0.7	0.7	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	1	1	5	0.7	0.7	ug/L	8260D
o-Nitroaniline CAS # 88-74-4													
Second Quarter 2024	-	U	U	U	1.4 J	1.3 J	10	10	150	1	1	ug/L	8270E

See last page of this report for definitions.



Summary of Annual Target Analyte Monitoring Results - Appendix K
Corrective Action Monitoring Plan - Targeted Constituents

Hazardous Waste Management Unit 5

Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 5W8B

Analyte/Quarter	5W8B Q	5W5B Q	5W7B Q	5WC21 Q	5WC22 Q	5WC23 Q	QL	Permit QL	GPS	DL	Permit DL	UNIT	Method
p-Nitroaniline CAS # 100-01-6													
Second Quarter 2024	-	U	U	U	U	U	3	20	20	1.5	1.5	ug/L	8270E
Nitrobenzene CAS # 98-95-3													
Second Quarter 2024	-	U	U	U	U	U	10	10	10	0.8	0.8	ug/L	8270E
Toluene CAS # 108-88-3													
Second Quarter 2024	-	U	U	U	U	U R	1	1	1,000	0.3	0.3	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	1	1	1,000	0.3	0.3	ug/L	8260D
Xylenes (Total) CAS # 1330-20-7													
Second Quarter 2024	-	U	U	U	U	U R	3	3	10,000	0.4	0.4	ug/L	8260D
Second Quarter 2024-resample	-	-	-	-	-	U	3	3	10,000	0.4	0.4	ug/L	8260D

Summary of Annual Target Analyte Monitoring Results - Appendix K
Corrective Action Monitoring Plan - Targeted Constituents

Hazardous Waste Management Unit 5

Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 5W8B

Analyte/Quarter	5W8B Q	5W5B Q	5W7B Q	5WC21 Q	5WC22 Q	5WC23 Q	QL	Permit QL	GPS	DL	Permit DL	UNIT	Method
-----------------	--------	--------	--------	---------	---------	---------	----	-----------	-----	----	-----------	------	--------

Definitions:

Results are reported to the Permit Detection Limit. Inorganic results reported as total, unless noted as dissolved.

First Corrective Action Monitoring Event Second Quarter 2010:

QL: Denotes laboratory quantitation limit.

Permit QL: Denotes permit quantitation limit. Approved May 5, 2021

Class 1 Permit Modification approved May 5, 2021

DL: Denotes laboratory detection limit.

Permit DL: Denotes permit detection limit.

Class 1 Permit Modification approved May 5, 2021

U: Denotes not detected at or above the permit detection limit or QL.

UA: Denotes not detected at or above the adjusted detection limit or adjusted QL.

J: Denotes result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above the detection limit or QL and detection limit and QL are estimated. When used with "UA" (i.e., "UAJ"), denotes analyte not detected at or above adjusted detection limit and adjusted detection limit and QL are estimated.

UN: Denotes analyte concentration is less than the QL and/or five times the blank concentration. Not reliably detected due to blank contamination.

R: Denotes result rejected.

Q: Denotes data validation qualifier.

X: Denotes mass spectral confirmation not obtained - result suspect.

CAS#: Denotes Chemical Abstract Services registration number.

GPS: Denotes Groundwater Protection Standards listed in Appendix K of Module VI-Groundwater Corrective Action & Monitoring Program for Unit 5 (approved by the VDEQ and incorporated into the Final Hazardous Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (original effective date October 4, 2002 and reissued August 16, 2014; Dec 2016 and May 5, 2021 Class I Permit Mods);

“-“: Denotes not sampled.


Indicator Parameter Data for Monitoring Wells
Radford Army Ammunition Plant (RFAAP) - Hazardous Waste Management Unit #5
Radford, Virginia

<i>Indicator Parameter</i>	<i>Unit</i>	<i>5W8B</i>	<i>5W5B</i>	<i>5W7B</i>	<i>5WC21</i>	<i>5WC22</i>	<i>5WC23</i>	<i>5W12A</i>
Second Quarter 2024								
DO	mg/L	3.57	0.95	2.23	1.58	0.04	0.7	1.09
ORP	mV	359.9	290	292.4	253.6	185.6	194.8	183.1
pH	s.u.	4.88	5.26	5.44	5.57	6.76	6.77	6.77
Specific Conductivity	uS/cm	64	307	134	458	758	837	459
Temperature	deg C	14.41	13.92	14.26	15.99	14.57	13.77	15
Turbidity	NTU	0.73	0.54	0.47	5.76	8.61	0.8	0.5
Second Quarter 2024-resample								
DO	mg/L	-	-	-	-	-	0.22	-
ORP	mV	-	-	-	-	-	132.4	-
pH	s.u.	-	-	-	-	-	6.78	-
Specific Conductivity	uS/cm	-	-	-	-	-	867	-
Temperature	deg C	-	-	-	-	-	13.59	-
Turbidity	NTU	-	-	-	-	-	0.59	-
Third Quarter 2024								
DO	mg/L	2.93	1.52	1	1.08	0.01	0.35	0.39
ORP	mV	336.9	246	230	196.7	126.8	107.4	153.7
pH	s.u.	4.73	5.15	5.19	5.47	6.68	6.78	6.7
Specific Conductivity	uS/cm	57	333	138	470	780	848	518
Temperature	deg C	16.06	16.59	17.33	15.91	16.46	16.96	16.01
Turbidity	NTU	0.68	0.8	0.53	1.05	4.11	1.15	0.95

APPENDIX B

HWMU-16

NOTES:
1. Topographic Contour Interval 2'.
2. Two-foot contours derived from 2017 LiDAR: U.S. Geological Survey 20210629, USGS 1 Meter 17 x53&54y412 VA_FEMA NRCS_SouthCentral_2017_D17.

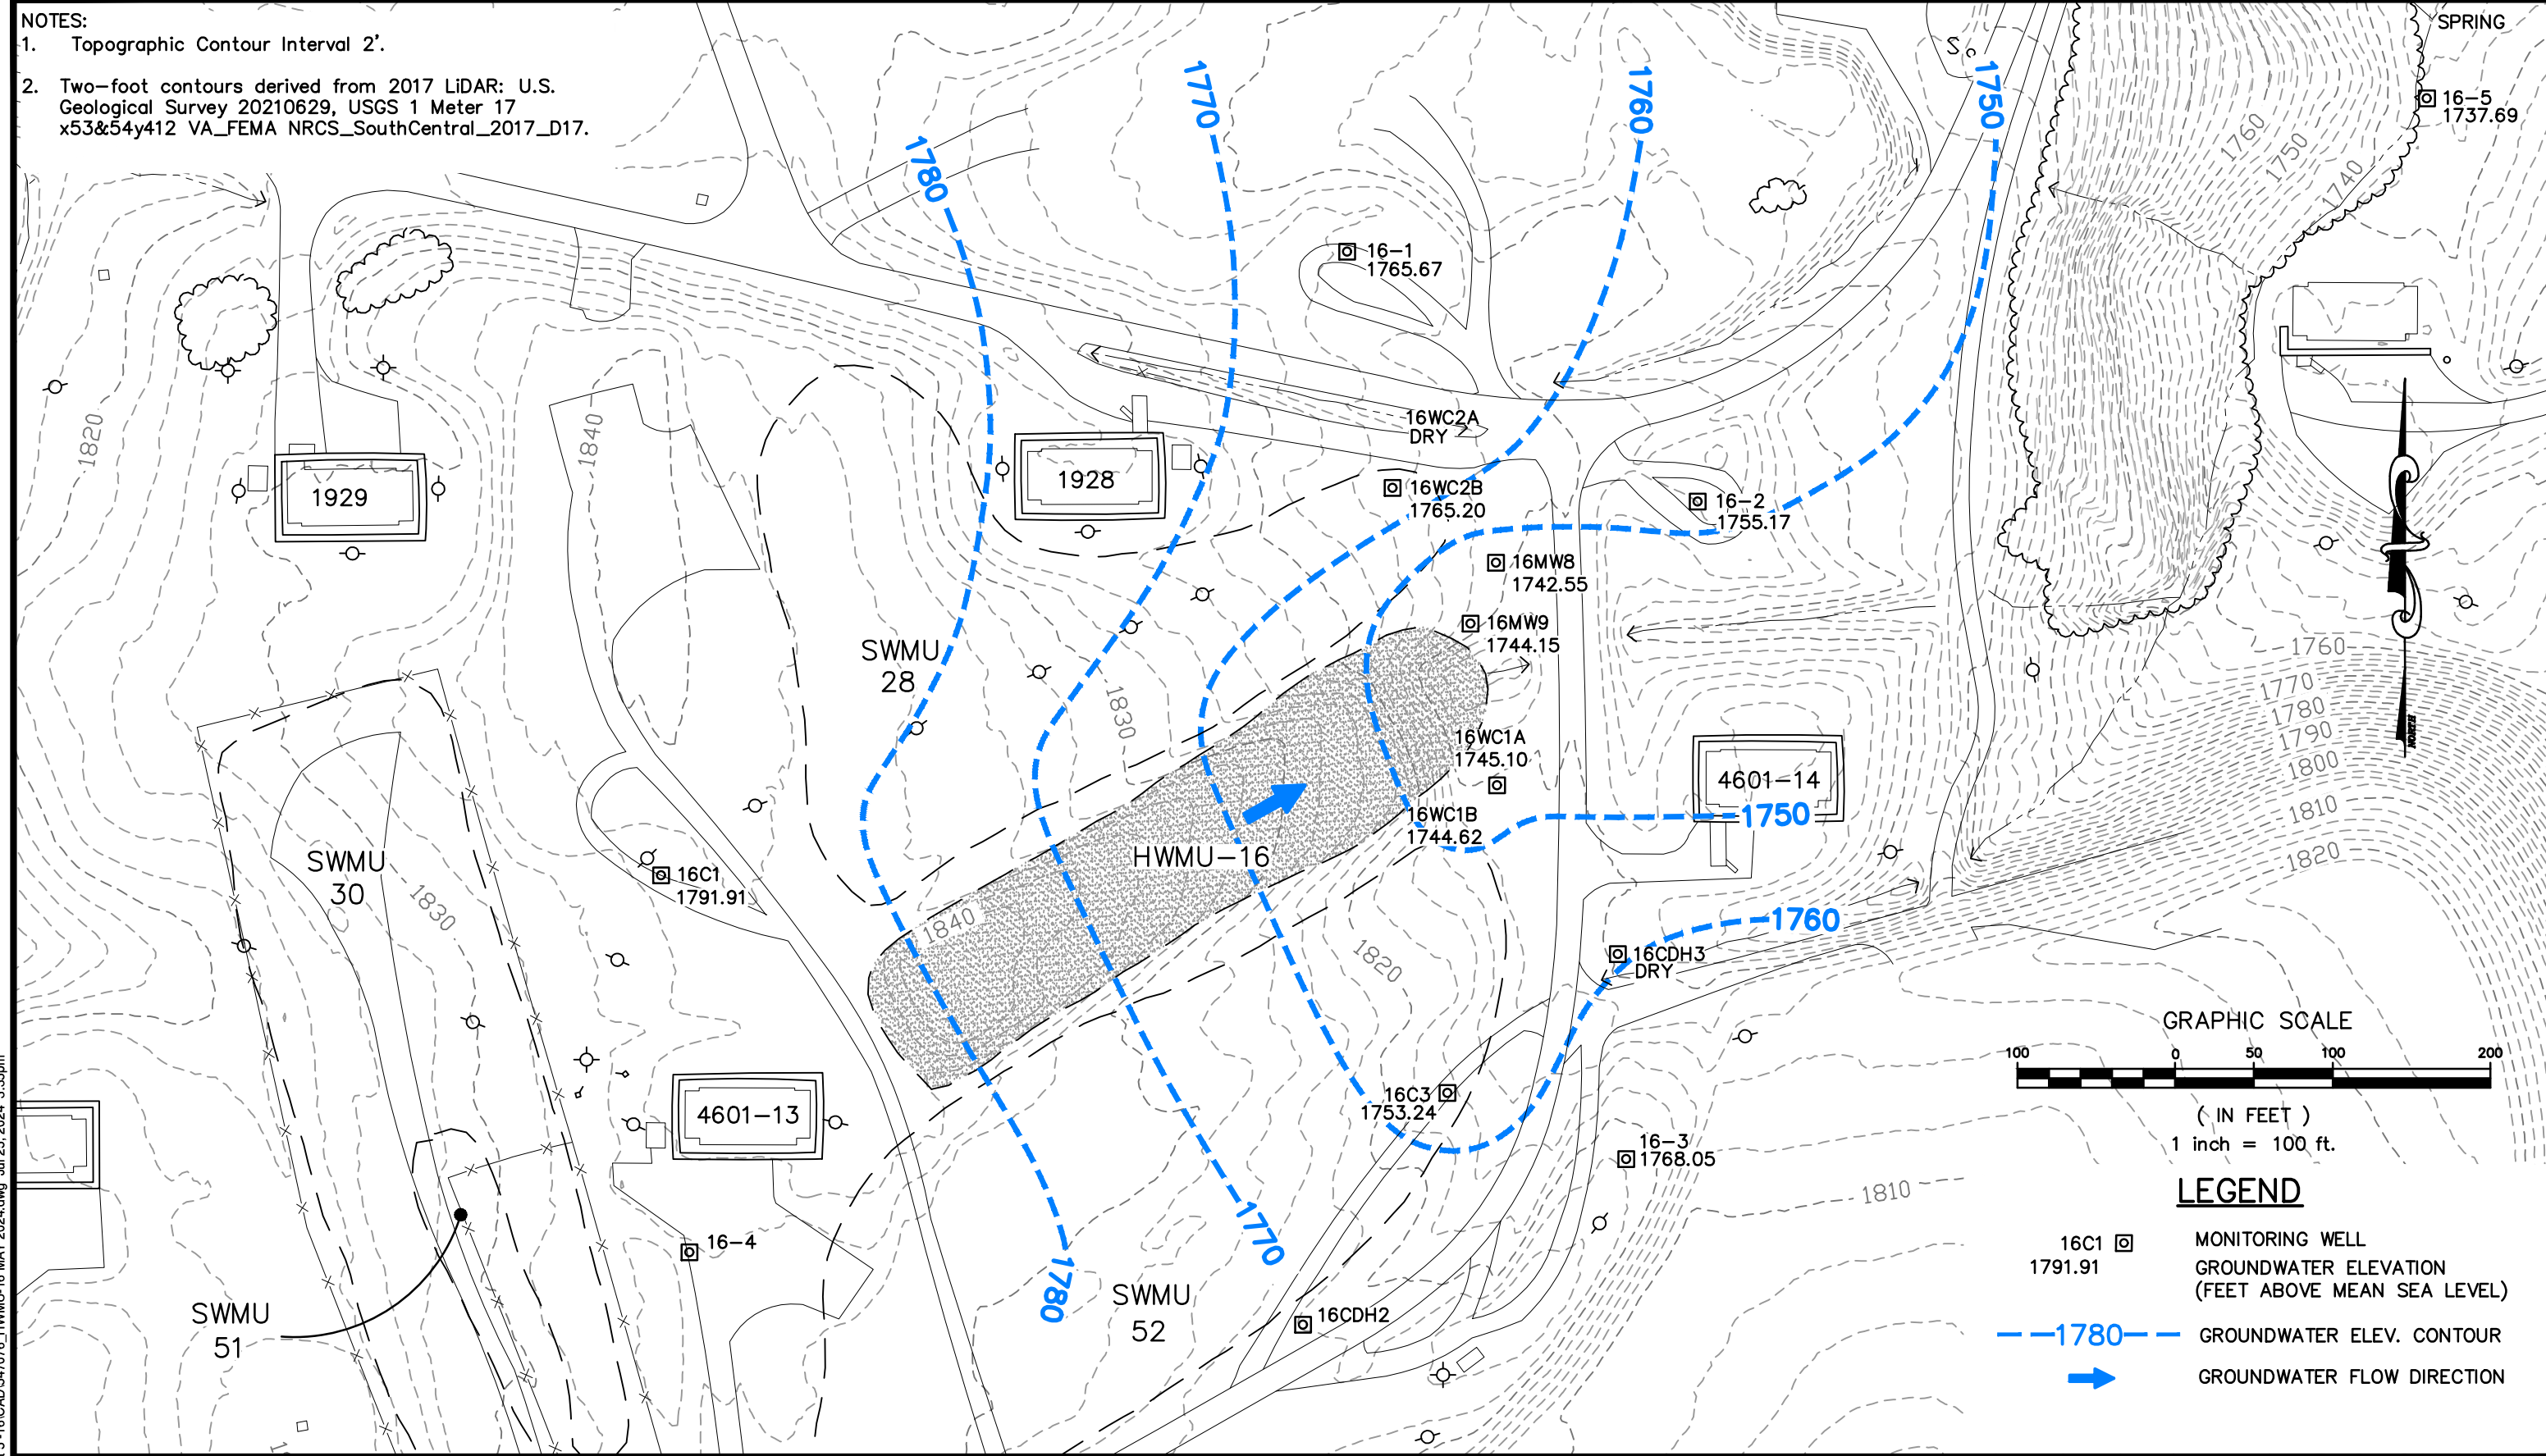

GRAPHIC SCALE
100 0 50 100 200
(IN FEET)
1 inch = 100 ft.

LEGEND

16C1 □ 1791.91 MONITORING WELL
GROUNDWATER ELEVATION
(FEET ABOVE MEAN SEA LEVEL)


---1780--- GROUNDWATER ELEV. CONTOUR

➔ GROUNDWATER FLOW DIRECTION

 TRC ENGINEERS, INC.	2200 South Main Street, Suite A Blacksburg, VA 24060 540-552-0444	DESIGNED DRAWN CHECKED DATE	WMD DLD MDL 07/25/2024	HWMU-16 POTENTIOMETRIC SURFACE MAP - MAY 07, 2024 RADFORD ARMY AMMUNITION PLANT RADFORD, VIRGINIA	SCALE: 1"=100'	FIGURE 1a
					PLAN NO. 547076	

P:\2023\547076 2023 - Unit 5 - 16\CAD\547076_HWMU-16 MAY 2024.dwg Jul 25, 2024 3:35pm

NOTES:
1. Topographic Contour Interval 2'.
2. Two-foot contours derived from 2017 LiDAR: U.S. Geological Survey 20210629, USGS 1 Meter 17 x53&54y412 VA_FEMA NRCS_SouthCentral_2017_D17.

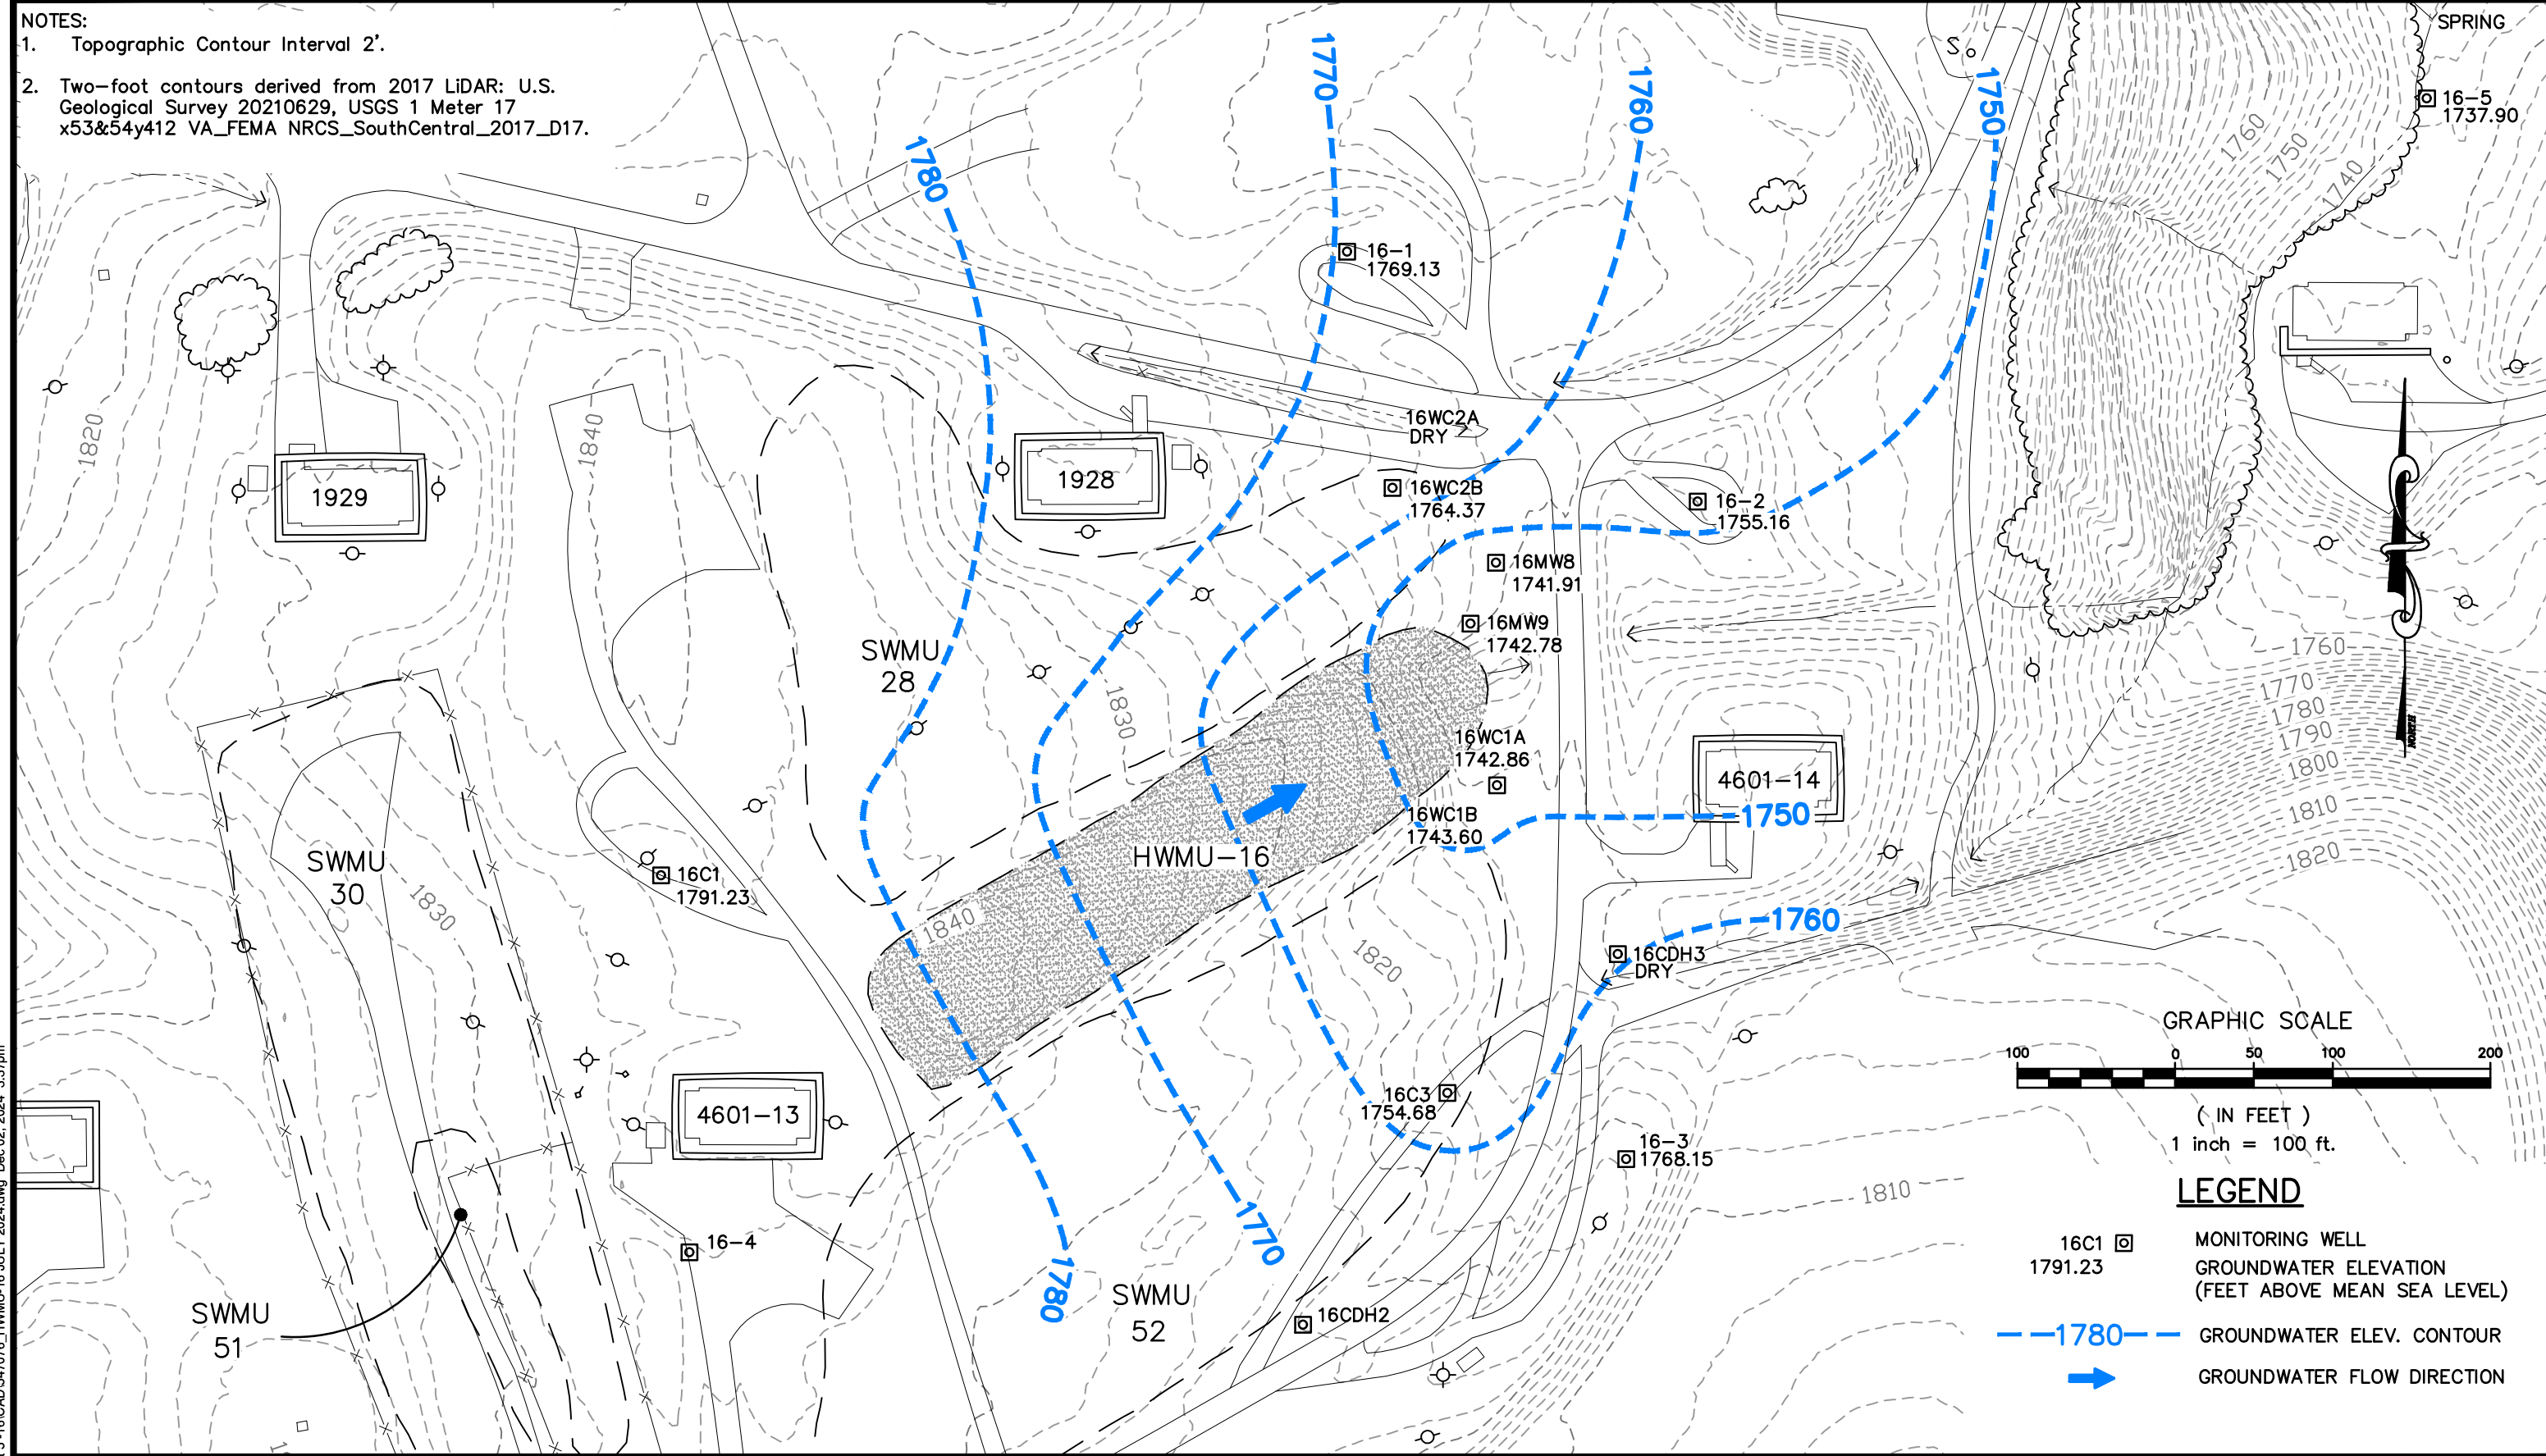

GRAPHIC SCALE
100 0 50 100 200
(IN FEET)
1 inch = 100 ft.

LEGEND

16C1 □ 1791.23 MONITORING WELL
GROUNDWATER ELEVATION
(FEET ABOVE MEAN SEA LEVEL)

---1780--- GROUNDWATER ELEV. CONTOUR

➔ GROUNDWATER FLOW DIRECTION

 TRC ENGINEERS, INC.	2200 South Main Street, Suite A Blacksburg, VA 24060 540-552-0444	DESIGNED DRAWN CHECKED DATE	BM DLD MDL 12/02/2024	HWMU-16 POTENTIOMETRIC SURFACE MAP - JULY 30, 2024 RADFORD ARMY AMMUNITION PLANT RADFORD, VIRGINIA	SCALE: 1"=100'	FIGURE 1b
					PLAN NO. 547076	

P:\2023\547076 2023 - Unit 5 - 16\CAD\547076_HWMU-16 JULY 2024.dwg Dec 02, 2024 3:37pm

Target Analyte Monitoring Results - HWMU-16 Point of Compliance
Wells Radford Army Ammunition Plant, Radford, Virginia
Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
Antimony CAS # 7440-36-0											
Third Quarter 2024	U	U	U	U	U	2	2	0.6	0.6	-	6020B
Arsenic CAS # 7440-38-2											
Second Quarter 2024	U	U	U	U	U	10	10	2	2	10	6020B
Third Quarter 2024	U	U	2.3 J	3.5 J	U	10	10	2	2	10	6020B
Barium CAS # 7440-39-3											
Second Quarter 2024	190	120	620	340	73	10	10	1.3	1.3	2000	6020B
Third Quarter 2024	200	120	570	340	67	10	10	1.3	1.3	2000	6020B
Beryllium CAS # 7440-41-7											
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	4	6020B
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	4	6020B
Cadmium CAS # 7440-43-9											
Second Quarter 2024	U	U	U	U	U	1	1	0.2	0.2	5	6020B
Third Quarter 2024	U	0.23 J	U	U	U	1	1	0.2	0.2	5	6020B
Chromium CAS # 7440-47-3											
Second Quarter 2024	U	U	U	U	U	5	5	1	1	100	6020B
Third Quarter 2024	U	U	U	U	2 J	5	5	1	1	100	6020B
Cobalt CAS # 7440-48-4											
Second Quarter 2024	U	U	5	12	U	5	5	1	1	5	6020B
Third Quarter 2024	U	U	5.1	10	U	5	5	1	1	5	6020B
Copper CAS # 7440-50-8											
Second Quarter 2024	U	12	U	U	U	5	5	1.7	1.7	1300	6020B
Third Quarter 2024	U	14	U	U	U	5	5	1.7	1.7	1300	6020B
Lead CAS # 7439-92-1											
Second Quarter 2024	U	U	U	U	U	3	3	1	1	15	6020B
Third Quarter 2024	U	U	U	U	U	3	3	1	1	15	6020B
Mercury CAS # 7439-97-6											
Second Quarter 2024	U	U	U	U	U	2	2	0.2	0.2	2	7470A
Third Quarter 2024	U	U	U	U	0.25 J	2	2	0.2	0.2	2	7470A
Nickel CAS # 7440-02-0											
Second Quarter 2024	U	U	12	U	U	10	10	2	2	300	6020B
Third Quarter 2024	3.1 J	2.6 J	11	8 J	U	10	10	2	2	300	6020B
Selenium CAS # 7782-49-2											
Third Quarter 2024	U	U	U	U	U	10	10	3	3	-	6020B
Silver CAS # 7440-22-4											
Second Quarter 2024	U	U	U	U	U	2	2	0.3	0.3	94	6020B
Third Quarter 2024	U	U	U	U	U	2	2	0.3	0.3	94	6020B
Thallium CAS # 7440-28-0											
Third Quarter 2024	U	U	U	U	U	1	1	0.2	0.2	-	6020B
Vanadium CAS # 7440-62-2											
Second Quarter 2024	U	U	U	U	U	10	10	2.5	2.5	151	6020B
Third Quarter 2024	U	U	U	U	U	10	10	2.5	2.5	151	6020B
Zinc CAS # 7440-66-6											
Second Quarter 2024	U	U	U	U	U	30	30	7.3	7.3	4700	6020B
Third Quarter 2024	U	55	U	U	U	30	30	7.3	7.3	4700	6020B
Cyanide CAS # 57-12-5											
Third Quarter 2024	U	U	U	U	U	20	20	5	5	-	9012B
Acenaphthene CAS # 83-32-9											
Third Quarter 2024	U	U J	U	U	U	10	10	0.35	0.35	-	8270E
Acenaphthylene CAS # 208-96-8											
Third Quarter 2024	U	U J	U	U	U	10	10	0.48	0.48	-	8270E
Acetone CAS # 67-64-1											
Third Quarter 2024	U	U	U	U	U J	10	10	2	2	-	8260D
Acetonitrile CAS # 75-05-8											
Third Quarter 2024	U	U	U	U	U	100	100	31.6	31.67	-	8260D

See last page of this report for definitions.



Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
Acetophenone	CAS # 98-86-2										
Third Quarter 2024	U	U	U	U	U	9.3	10	0.93	1	-	8270E
2-Acetylaminofluorene	CAS # 53-96-3										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Acrolein	CAS # 107-02-8										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	3.4	3.4	-	8260D
Acrylonitrile	CAS # 107-13-1										
Third Quarter 2024	U	U	U	U	U J	10	10	1.1	1.1	-	8260D
Allyl chloride	CAS # 107-05-1										
Third Quarter 2024	U	U	U	U	U	10	10	1	1	-	8260D
4-Aminobiphenyl	CAS # 92-67-1										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Aniline	CAS # 62-53-3										
Third Quarter 2024	U	U	U	U	U	9.3	10	1	1.1	-	8270E
Anthracene	CAS # 120-12-7										
Third Quarter 2024	U	U J	U	U	U	10	10	0.52	0.52	-	8270E
Aramite	CAS # 140-57-8										
Third Quarter 2024	U	U	U	U	U	9.3	10	3.4	3.7	-	8270E
Benzene	CAS # 71-43-2										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
Third Quarter 2024	0.328 J	U	0.33 J	U	U	1	1	0.3	0.3	5	8260D
Benzo[a]anthracene	CAS # 56-55-3										
Third Quarter 2024	U	U J	U	U	U	10	10	0.45	0.45	-	8270E
Benzo[b]fluoranthene	CAS # 205-99-2										
Third Quarter 2024	U	U J	U	U	U	10	10	1.2	1.2	-	8270E
Benzo[k]fluoranthene	CAS # 207-08-9										
Third Quarter 2024	U	U	U	U	U	10	10	1.6	1.6	-	8270E
Benzo[ghi]perylene	CAS # 191-24-2										
Third Quarter 2024	U	U	U	U	U	10	10	0.42	0.42	-	8270E
Benzo(a)pyrene	CAS # 50-32-8										
Third Quarter 2024	U	U J	U	U	U	10	10	1.5	1.5	-	8270E
1,4-Benzenediamine	CAS # 106-50-3										
Third Quarter 2024	U J	U J	U J	U J	U J	140	150	24	26.4	-	8270E
Benzyl alcohol	CAS # 100-51-6										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
bis(2-Chloroethoxy)methane	CAS # 111-91-1										
Third Quarter 2024	U	U	U	U	U	0.93	1	0.46	0.5	-	8270E
bis(2-Chloroethyl)ether	CAS # 111-44-4										
Third Quarter 2024	U	U	U	U	U	0.93	1	0.46	0.5	-	8270E
bis(2-Chloro-1-methylethyl)ether	CAS # 108-60-1										
Third Quarter 2024	U	U J	U	U	U	10	10	0.6	0.6	-	8270E
bis(2-Ethylhexyl)phthalate	CAS # 117-81-7										
Third Quarter 2024	U	U	U	U	U	10	10	2	2	-	8270E
Bromodichloromethane	CAS # 75-27-4										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Bromoform	CAS # 75-25-2										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
4-Bromophenyl phenyl ether	CAS # 101-55-3										
Third Quarter 2024	U	U J	U	U	U	10	10	0.56	0.56	-	8270E
2-Butanone	CAS # 78-93-3										
Second Quarter 2024	U	U	U	U	U	10	10	1.7	1.7	4900	8260D
Third Quarter 2024	U	U	U	U	U J	10	10	1.7	1.7	4900	8260D
Butyl benzyl phthalate	CAS # 85-68-7										
Third Quarter 2024	U	U	U	U	U	9.3	10	0.65	0.7	-	8270E
Carbon disulfide	CAS # 75-15-0										
Third Quarter 2024	U	U	U	U	U	10	10	0.4	0.4	-	8260D

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
Carbon tetrachloride						CAS # 56-23-5					
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
p-Chloroaniline						CAS # 106-47-8					
Third Quarter 2024	U	U	U	U	U	9.3	10	3.1	3.3	-	8270E
Chlorobenzilate						CAS # 510-15-6					
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
p-Chloro-m-cresol						CAS # 59-50-7					
Third Quarter 2024	U	U J	U	U J	U	10	10	1	1	-	8270E
Chloroethane						CAS # 75-00-3					
Second Quarter 2024	3.3	U	2	1.2	U J	1	1	0.07		21000	8260D
Third Quarter 2024	2.7	U	1.39	1.12	U	1	1	0.1		21000	8260D
Chloroform						CAS # 67-66-3					
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
2-Chloronaphthalene						CAS # 91-58-7					
Third Quarter 2024	U	U J	U	U	U	10	10	0.5	0.5	-	8270E
2-Chlorophenol						CAS # 95-57-8					
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	1	1	-	8270E
4-Chlorophenyl phenyl ether						CAS # 7005-72-3					
Third Quarter 2024	U	U J	U	U	U	10	10	0.6	0.6	-	8270E
Chloroprene						CAS # 126-99-8					
Third Quarter 2024	U	U	U	U	U	10	10	0.46	0.46	-	8260D
Chrysene						CAS # 218-01-9					
Third Quarter 2024	U	U J	U	U	U	10	10	0.31	0.31	-	8270E
Diallate						CAS # 2303-16-4					
Third Quarter 2024	U	U	U	U	U	10	10	3	3	-	8270E
Dibenz(a,h)anthracene						CAS # 53-70-3					
Third Quarter 2024	U	U	U	U	U	10	10	0.38	0.38	-	8270E
Dibenzofuran						CAS # 132-64-9					
Third Quarter 2024	U	U J	U	U	U	10	10	0.6	0.6	-	8270E
Dibromochloromethane						CAS # 124-48-1					
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,2-Dibromo-3-chloropropane						CAS # 96-12-8					
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,2-Dibromoethane						CAS # 106-93-4					
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Di-n-butyl phthalate						CAS # 84-74-2					
Third Quarter 2024	U	U	U	U	U	9.3	10	1.7	1.8	-	8270E
1,2-Dichlorobenzene						CAS # 95-50-1					
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,3-Dichlorobenzene						CAS # 541-73-1					
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,4-Dichlorobenzene						CAS # 106-46-7					
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
3,3'-Dichlorobenzidine						CAS # 91-94-1					
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
trans-1,4-Dichloro-2-butene						CAS # 110-57-6					
Third Quarter 2024	U J	U J	U J	U J	U J	2.5	10	1.5	1.5	-	8260D
Dichlorodifluoromethane						CAS # 75-71-8					
Second Quarter 2024	U J	U J	U J	U J	U J	1	1	0.4	0.4	190	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	190	8260D
1,1-Dichloroethane						CAS # 75-34-3					
Second Quarter 2024	5.5	U	4.9	2	U	1	1	0.3	0.3	9.5	8260D
Third Quarter 2024	5.03	U	4.21	2.14	U	1	1	0.3	0.3	9.5	8260D
1,2-Dichloroethane						CAS # 107-06-2					
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
1,1-Dichloroethene	CAS # 75-35-4										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	7	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	7	8260D
trans-1,2-Dichloroethene	CAS # 156-60-5										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
2,4-Dichlorophenol	CAS # 120-83-2										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	1.59	1.59	-	8270E
2,6-Dichlorophenol	CAS # 87-65-0										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	1.4	1.4	-	8270E
1,2-Dichloropropane	CAS # 78-87-5										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,3-Dichloropropane	CAS # 142-28-9										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
trans-1,3-Dichloropropene	CAS # 10061-02-6										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
Diethyl ether	CAS # 60-29-7										
Second Quarter 2024	38 J	U J	62 J	19 J	U J	10	12.5	1.1	1.11	7300	8260D
Third Quarter 2024	37 J	3.88 J	60.4	18.8	U	10	12.5	1.1	1.11	7300	8260D
Diethyl phthalate	CAS # 84-66-2										
Second Quarter 2024	U	U	U	U	U	5	5	2	2	11000	8270E
Third Quarter 2024	U	U J	U	U	U	5	5	2	2	11000	8270E
O,O-Diethyl O-2-pyrazinyl	CAS # 297-97-2										
Third Quarter 2024	U	U	U	U	U	10	10	2.4	2.4	-	8270E
Dimethoate	CAS # 60-51-5										
Third Quarter 2024	U	U	U	U	U	10	10	3	3	-	8270E
Dimethyl ether	CAS # 115-10-6										
Second Quarter 2024	U	U	U	U	U	10	12.5	1.1	1.11	17	8260C
Third Quarter 2024	8.4 J	U	1.3 J	U	U	10	12.5	1.1	1.11	17	8260C
p-(Dimethylamino)azobenzene	CAS # 60-11-7										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
7,12-Dimethylbenz[a]anthracene	CAS # 57-97-6										
Third Quarter 2024	U	U	U	U	U	9.3	10	1.7	1.8	-	8270E
3,3'-Dimethylbenzidine	CAS # 119-93-7										
Third Quarter 2024	U	U	U	U	U	9.3	10	3.1	3.3	-	8270E
a,a-Dimethylphenethylamine	CAS # 122-09-8										
Third Quarter 2024	U J	U J	-	-	-	9.41	50	2.82	5	-	8270E
Third Quarter 2024	-	-	-	U J	-	8.85	50	2.65	5	-	8270E
Third Quarter 2024	-	-	U J	-	-	9.4	50	2.82	5	-	8270E
Third Quarter 2024	-	-	-	-	U J	9.37	50	2.81	5	-	8270E
2,4-Dimethylphenol	CAS # 105-67-9										
Third Quarter 2024	U J	U J	U J	U J	U J	9.3	10	2.8	3	-	8270E
Dimethyl phthalate	CAS # 131-11-3										
Third Quarter 2024	-	-	U	-	-	0.94	10	0.282	0.5	-	8270E
Third Quarter 2024	-	-	-	U J	-	0.885	10	0.265	0.5	-	8270E
Third Quarter 2024	U	U	-	-	-	0.941	10	0.282	0.5	-	8270E
Third Quarter 2024	-	-	-	-	U	0.937	10	0.281	0.5	-	8270E
m-Dinitrobenzene	CAS # 99-65-0										
Third Quarter 2024	U	U J	U	U	U	10	10	2.3	2.3	-	8270E
4,6-Dinitro-o-cresol	CAS # 534-52-1										
Third Quarter 2024	U	U	U	U J	U	9.3	10	2.8	3	-	8270E
2,4-Dinitrophenol	CAS # 51-28-5										
Third Quarter 2024	U	U	U	U J	U	9.3	10	5.7	6.2	-	8270E
2,4-Dinitrotoluene	CAS # 121-14-2										
Second Quarter 2024	U	U	U	U	U	10	10	2.1	2.1	10	8270E
Third Quarter 2024	U	U J	U	U	U	10	10	2.1	2.1	10	8270E

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
2,6-Dinitrotoluene	CAS # 606-20-2										
Second Quarter 2024	U	U	U	U	U	10	10	2.1	2.1	10	8270E
Third Quarter 2024	U	U J	U	U	U	10	10	2.1	2.1	10	8270E
Di-n-octyl phthalate	CAS # 117-84-0										
Third Quarter 2024	-	-	U	-	-	0.94	10	0.282	0.8	-	8270E
Third Quarter 2024	U	U	-	-	-	0.941	10	0.282	0.8	-	8270E
Third Quarter 2024	-	-	-	-	U	0.937	10	0.281	0.8	-	8270E
Third Quarter 2024	-	-	-	U J	-	0.885	10	0.265	0.8	-	8270E
1,4-Dioxane	CAS # 123-91-1										
Third Quarter 2024	U	U	U	U	U J	200	200	45	45.48	-	8260D
Diphenylamine	CAS #										
Third Quarter 2024	U	U J	U	U	U	10	10	0.58	0.58	-	8270E
Disulfoton	CAS # 298-04-4										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Ethylbenzene	CAS # 100-41-4										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	700	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	700	8260D
Ethyl methacrylate	CAS # 97-63-2										
Third Quarter 2024	U	U	U	U	U	10	10	0.81	0.81	-	8260D
Ethyl methanesulfonate	CAS # 62-50-0										
Third Quarter 2024	U	U	U	U	U	10	10	1.1	1.1	-	8270E
Famphur	CAS # 52-85-7										
Third Quarter 2024	U J	U J	U J	U J	U J	9.3	10	4.6	5	-	8270E
Fluoranthene	CAS # 206-44-0										
Third Quarter 2024	U	U J	U	U	U	10	10	0.42	0.42	-	8270E
Fluorene	CAS # 86-73-7										
Third Quarter 2024	U	U J	U	U	U	10	10	0.38	0.38	-	8270E
Hexachlorobenzene	CAS # 118-74-1										
Third Quarter 2024	U	U J	U	U	U	10	10	0.87	0.87	-	8270E
Hexachlorobutadiene	CAS # 87-68-3										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
Hexachlorocyclopentadiene	CAS # 77-47-4										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Hexachloroethane	CAS # 67-72-1										
Third Quarter 2024	U	U	U	U	U	9.3	10	0.37	0.4	-	8270E
Hexachlorophene	CAS # 70-30-4										
Third Quarter 2024	U J	-	-	-	-	471	500	157	185	-	8270E
Third Quarter 2024	-	-	-	-	U J	469	500	156	185	-	8270E
Third Quarter 2024	-	-	-	U J	-	442	500	148	185	-	8270E
Third Quarter 2024	-	U J	U J	-	-	470	500	157	185	-	8270E
Hexachloropropene	CAS # 1888-71-7										
Third Quarter 2024	U	U	U	U	U	10	10	2	2	-	8270E
2-Hexanone	CAS # 591-78-6										
Third Quarter 2024	U	U	U	U	U J	10	10	2	2	-	8260D
Indeno[1,2,3-cd]pyrene	CAS # 193-39-5										
Third Quarter 2024	U	U	U	U	U	10	10	0.15	0.15	-	8270E
Isobutyl alcohol	CAS # 78-83-1										
Third Quarter 2024	U	U	U	U	U J	200	200	11.6	11.6	-	8260D
Isodrin	CAS # 465-73-6										
Third Quarter 2024	U	U	U	U	U	10	10	1.1	1.1	-	8270E
Isophorone	CAS # 78-59-1										
Third Quarter 2024	U	U	U	U	U	9.3	10	0.46	0.5	-	8270E
Isosafrole	CAS # 120-58-1										
Third Quarter 2024	U	U	U	U	U	9.3	10	1.5	1.6	-	8270E
Kepone	CAS # 143-50-0										
Third Quarter 2024	U	U J	U	U	U	50	50	25	25	-	8270E

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
Methacrylonitrile											
					CAS # 126-98-7						
Third Quarter 2024	U	U	U	U	U J	100	100	9.75	9.75	-	8260D
Methapyrilene											
					CAS # 91-80-5						
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Bromomethane											
					CAS # 74-83-9						
Third Quarter 2024	U	U	U	U	U	1	1	0.54	0.542	-	8260D
Chloromethane											
					CAS # 74-87-3						
Second Quarter 2024	U	U	U	U	U J	1	1	0.1		190	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.1		190	8260D
3-Methylcholanthrene											
					CAS # 56-49-5						
Third Quarter 2024	U	U	U	U	U	9.3	10	0.93	1	-	8270E
Iodomethane											
					CAS # 74-88-4						
Third Quarter 2024	U	U	U	U	U	10	10	0.58	0.58	-	8260D
Methyl methacrylate											
					CAS # 80-62-6						
Third Quarter 2024	U	U	U	U	U J	10	10	3.58	3.58	-	8260D
Methyl methane sulfonate											
					CAS # 66-27-3						
Third Quarter 2024	U	U	U	U	U	9.3	10	0.93	1	-	8270E
2-Methylnaphthalene											
					CAS # 91-57-6						
Third Quarter 2024	U	U J	U	U	U	10	10	0.29	0.29	-	8270E
Methyl parathion											
					CAS # 298-00-0						
Third Quarter 2024	U	U	U	U	U	9.3	10	3	3.2	-	8270E
4-Methyl-2-pentanone											
					CAS # 108-10-1						
Third Quarter 2024	U	U	U	U	U J	10	10	2	2	-	8260D
2-Methylphenol											
					CAS # 95-48-7						
Third Quarter 2024	U	U J	U	U J	U	10	10	0.96	0.96	-	8270E
3 & 4-Methylphenol											
					CAS #						
Third Quarter 2024	U	U J	U	U J	U	20	20	2.47	2.47	-	8270E
Dibromomethane											
					CAS # 74-95-3						
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Methylene chloride											
					CAS # 75-09-2						
Second Quarter 2024	U	U	U	U	U	1	1	0.7	0.7	13.95	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.7	0.7	13.95	8260D
Naphthalene											
					CAS # 91-20-3						
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	-	8260D
1,4-Naphthoquinone											
					CAS # 130-15-4						
Third Quarter 2024	U J	U J	U J	U J	U J	9.3	10	2.8	3	-	8270E
1-Naphthylamine											
					CAS # 134-32-7						
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
2-Naphthylamine											
					CAS # 91-59-8						
Third Quarter 2024	U	U	U	U	U	9.3	10	6.5	7	-	8270E
o-Nitroaniline											
					CAS # 88-74-4						
Third Quarter 2024	U	U J	U	U	U	10	10	1	1	-	8270E
m-Nitroaniline											
					CAS # 99-09-2						
Third Quarter 2024	U	U	U	U J	U	9.3	10	1.9	2	-	8270E
p-Nitroaniline											
					CAS # 100-01-6						
Third Quarter 2024	U	U	U	U	U	9.3	10	1.4	1.5	-	8270E
Nitrobenzene											
					CAS # 98-95-3						
Third Quarter 2024	U	U	U	U	U	10	10	0.6	0.6	-	8270E
o-Nitrophenol											
					CAS # 88-75-5						
Third Quarter 2024	U	U J	U	U J	U	10	10	1.27	1.27	-	8270E
p-Nitrophenol											
					CAS # 100-02-7						
Third Quarter 2024	U	U	U	U J	U	9.3	10	2.8	3	-	8270E
4-Nitroquinoline-1-oxide											
					CAS # 56-57-5						
Third Quarter 2024	U	U	U	U	U	46	50	4.6	5	-	8270E
N-Nitrosodi-n-butylamine											
					CAS # 924-16-3						
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
N-Nitrosodiethylamine						CAS # 55-18-5					
Third Quarter 2024	U	U	U	U	U	10	10	3	3	-	8270E
N-Nitrosodimethylamine						CAS # 62-75-9					
Third Quarter 2024	U	U	U	U	U	10	10	2	2	-	8270E
N-Nitrosodiphenylamine						CAS # 86-30-6					
Third Quarter 2024	U	U	U	U	U	10	10	0.58	0.58	-	8270E
N-Nitrosodipropylamine						CAS # 621-64-7					
Third Quarter 2024	U	U	U	U	U	9.3	10	0.46	0.5	-	8270E
N-Nitrosomethylethylamine						CAS # 10595-95-6					
Third Quarter 2024	U	U	U	U	U	9.3	10	0.93	1	-	8270E
N-Nitrosomorpholine						CAS # 59-89-2					
Third Quarter 2024	U	U	U	U	U	10	10	3	3	-	8270E
N-Nitrosopiperidine						CAS # 100-75-4					
Third Quarter 2024	U	U	U	U	U	10	10	1.1	1.1	-	8270E
N-Nitrosopyrrolidine						CAS # 930-55-2					
Third Quarter 2024	U	U	U	U	U	9.3	10	0.46	0.5	-	8270E
5-Nitroso-o-toluidine						CAS # 99-55-8					
Third Quarter 2024	U	U	U	U	U	10	10	2	2	-	8270E
Parathion						CAS # 56-38-2					
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Pentachlorobenzene						CAS # 608-93-5					
Third Quarter 2024	U	U	U	U	U	10	10	1.6	1.6	-	8270E
Pentachloroethane						CAS # 76-01-7					
Third Quarter 2024	U	U	U	U	U	10	10	1.7	1.7	-	8260D
Pentachloronitrobenzene						CAS # 82-68-8					
Third Quarter 2024	U	U	U	U	U	10	10	0.93	1	-	8270E
Pentachlorophenol						CAS # 87-86-5					
Third Quarter 2024	U	U J	U	U J	U	10	10	3	3	-	8270E
Phenacetin						CAS # 62-44-2					
Third Quarter 2024	U	U	U	U	U	10	10	1.4	1.4	-	8270E
Phenanthrene						CAS # 85-01-8					
Third Quarter 2024	U	U J	U	U	U	10	10	0.52	0.52	-	8270E
Phenol						CAS # 108-95-2					
Third Quarter 2024	U	U J	U	U J	U	10	10	0.77	0.77	-	8270E
Phorate						CAS # 298-02-2					
Third Quarter 2024	U	U	U	U	U	10	10	2.5	2.5	-	8270E
2-Picoline						CAS # 931-19-1					
Third Quarter 2024	U	U	U	U	U	9.3	10	0.93	1	-	8270E
Pronamide						CAS # 23950-58-5					
Third Quarter 2024	U	U	U	U	U	9.3	10	1.4	1.5	-	8270E
2-Propanol						CAS # 67-63-0					
Third Quarter 2024	U	U	U	U	U	100	100	50	50	-	8260D
Propionitrile						CAS # 107-12-0					
Third Quarter 2024	U	U	U	U	U J	100	100	10	10.22	-	8260D
Pyrene						CAS # 129-00-0					
Third Quarter 2024	U	U J	U	U	U	10	10	0.41	0.41	-	8270E
Pyridine						CAS # 110-86-1					
Third Quarter 2024	U J	U J	U J	U J	U J	9.3	10	1.9	2	-	8270E
Safrole						CAS # 94-59-7					
Third Quarter 2024	U	U	U	U	U	10	10	2.2	2.2	-	8270E
Styrene						CAS # 100-42-5					
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Sulfotep						CAS # 3689-24-5					
Third Quarter 2024	U	U	U	U	U	10	10	2.4	2.4	-	8270E
1,2,4,5-Tetrachlorobenzene						CAS # 95-94-3					
Third Quarter 2024	U	U J	U	U	U	10	10	2	2	-	8270E

See last page of this report for definitions.

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
1,1,1,2-Tetrachloroethane	CAS # 630-20-6										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
1,1,2,2-Tetrachloroethane	CAS # 79-34-5										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Tetrachloroethene	CAS # 127-18-4										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
Third Quarter 2024	U	U	U	U	U J	1	1	0.3	0.3	5	8260D
Tetrahydrofuran	CAS # 109-99-9										
Second Quarter 2024	U	U	U	U	U	25	25	2	2	3400	8260D
Third Quarter 2024	26.9	U	U	U	U J	25	25	2	2	3400	8260D
2,3,4,6-Tetrachlorophenol	CAS # 58-90-2										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	1.8	1.8	-	8270E
Toluene	CAS # 108-88-3										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	1000	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	1000	8260D
o-Toluidine	CAS # 95-53-4										
Third Quarter 2024	U	U	U	U	U	9.3	10	3.7	4	-	8270E
1,2,4-Trichlorobenzene	CAS # 120-82-1										
Third Quarter 2024	U	U	U	U	U	1	1	0.6	0.6	-	8260D
1,1,1-Trichloroethane	CAS # 71-55-6										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	200	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	200	8260D
1,1,2-Trichloroethane	CAS # 79-00-5										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
Trichloroethene	CAS # 79-01-6										
Second Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	5	8260D
Trichlorofluoromethane	CAS # 75-69-4										
Second Quarter 2024	U	U	U	U	U J	1	1	0.4	0.4	1000	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	1000	8260D
2,4,5-Trichlorophenol	CAS # 95-95-4										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	2	2	-	8270E
2,4,6-Trichlorophenol	CAS # 88-06-2										
Third Quarter 2024	U J	U J	U J	U J	U J	10	10	1.8	1.8	-	8270E
1,2,3-Trichloropropane	CAS # 96-18-4										
Third Quarter 2024	U	U	U	U	U	1	1	0.3	0.3	-	8260D
1,1,2-Trichloro-1,2,2-Trifluoroethane	CAS # 76-13-1										
Second Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	59000	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4	59000	8260D
O,O,O-Triethyl phosphorothioate	CAS # 126-68-1										
Third Quarter 2024	U	U	U	U	U	10	10	2.6	2.6	-	8270E
sym-Trinitrobenzene	CAS # 99-35-4										
Third Quarter 2024	U	U	U	U	U	9.3	10	2.8	3	-	8270E
Vinyl acetate	CAS # 108-05-4										
Third Quarter 2024	U	U	U	U	U	10	10	3.29	3.29	-	8260D
Vinyl chloride	CAS # 75-01-4										
Second Quarter 2024	U	U	U	U	U J	1	1	0.2	0.2	2	8260D
Third Quarter 2024	U	U	U	U	U	1	1	0.2	0.2	2	8260D
Xylenes (Total)	CAS # 1330-20-7										
Second Quarter 2024	U	U	U	U	U	3	3	0.4	0.4	10000	8260D
Third Quarter 2024	U	U	U	U	U	3	3	0.4	0.4	10000	8260D
m,p-Xylene	CAS # 179601-23-1										
Third Quarter 2024	U	U	U	U	U	2	2	0.4	0.4		8260D
o-Xylene	CAS # 95-47-6										
Third Quarter 2024	U	U	U	U	U	1	1	0.4	0.4		8260D

See last page of this report for definitions.



Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells Radford Army Ammunition Plant, Radford, Virginia

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	QL	Permit QL	DL	Permit DL	GPS	Method
-----------------	------	-------	-------	--------	--------	----	-----------	----	-----------	-----	--------

Definitions:

All inorganics reported as total unless noted.

The following definitions apply to results reported for Appendix IX monitoring events.

All Appendix IX monitoring results for compliance wells are reported to the detection limit.

Appendix IX Monitoring Events:

3Q2003, 2Q-2004, 2Q-2005, 3Q2006, 2Q2007, 2Q2008, 2Q2009, 2Q 2010, 2Q 2011, 2Q 2012, 2Q2013, 2Q2014, 2Q2015, 2Q2016, 2Q2017, 2Q2018, 2Q2019, 2Q2020, 4Q2021, 3Q2022, 3Q2023, 3Q2024

QL Denotes permit required quantitation limit. Class 1 Permit Mod 5/5/21, 2024 (total silver)

U denotes not detected at or above the permit required detection limit. Class 1 permit mod 5/5/21, 2024 (total silver)

UA denotes not detected at or above the adjusted detection limit.

J Denotes result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above the detection limit and detection limit and QL are estimated. When used with "UA"

(i.e., "UAJ"), denotes analyte not detected at or above adjusted detection limit and adjusted detection limit and QL are estimated.

UN Denotes analyte concentration is less than the quantitation limit and/or five times the blank concentration.

Not reliably detected due to blank contamination. This qualifier used only for Appendix IX monitoring event when compliance well results are reported to at or above the project detection limit.

R Denotes result rejected.

Q Denotes data validation qualifier. **X** Denotes mass spectral confirmation not obtained-result suspect.

Background Denotes background concentrations listed in Appendix G to Attachment 3 in the Final Hazardous

Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (rev 2014, 2016, 202, 2024), where applicable.

CAS# Denotes Chemical Abstract Services registration number.

GPS Denotes Groundwater Protection Standards listed in Appendix G to Attachment 3 in the Final Hazardous

Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002) (revised 2014, 2016, 2021, 2024).

NS denotes not sampled. **NA** denotes not analyzed.

"—" denotes not detected (pre-2nd Quarter 2003) or not available / not sampled (beginning 2nd Quarter 2003).

The following definitions apply to results reported for non-Appendix IX monitoring events.

All non-Appendix IX monitoring results for compliance wells are reported at or above the quantitation limit.

All inorganics reported as total unless noted.

QL Denotes permit required quantitation limit. Class 1 Permit Modification 5/5/21, 2024 (total silver).

U Denotes analyte not detected at or above QL.

UA Denotes analyte not detected at or above adjusted sample QL.

J Denotes result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above

QL and QL is estimated. When used with "UA" (i.e., "UAJ"), denotes analyte not detected at or above adjusted QL and adjusted QL is estimated.

UN Denotes analyte concentration is less than five times the blank concentration.

Not reliably detected due to blank contamination.

R Denotes result rejected.

Q Denotes data validation qualifier.

Background Denotes background concentrations listed in Appendix G to Attachment 3 in the Final Hazardous

Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002), (revised 2014, 2016, 2021, 2024), where applicable.

CAS# Denotes Chemical Abstract Services registration number.

GPS Denotes Groundwater Protection Standards listed in Appendix G to Attachment 3 in the Final Hazardous

Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002) (revised 2014, 2016, 2021, 2024).

Target Analyte Monitoring Results At Or Above Permit Quantitation Limit HWMU-16 Plume Monitoring Wells

Radford Army Ammunition Plant, Radford, Virginia

All Results in ug/L.

Upgradient well = 16C1

Analyte/Quarter	16C1 Q	16-2 Q	16-3 Q	16-5 Q	16WC2B Q	16SPRING Q	QL	Permit QL	Background	Method
Arsenic CAS #7440-38-2										
Second Quarter 2024	U	U	U	U	U	U	10	10	1	6020B
Third Quarter 2024	U	U	U	U	U	U	10	10	1	6020B
Barium CAS #7440-39-3										
Second Quarter 2024	190	230	720	170	110	210	10	10	175.4	6020B
Third Quarter 2024	200	220	720	160	110	200	10	10	175.4	6020B
Beryllium CAS #7440-41-7										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.7	6020B
Third Quarter 2024	U	U	U	U	U	U	1	1	0.7	6020B
Cadmium CAS #7440-43-9										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.2	6020B
Third Quarter 2024	U	U	U	U	U	U	1	1	0.2	6020B
Chromium CAS #7440-47-3										
Second Quarter 2024	U	U	U	U	U	U	5	5	6.2	6020B
Third Quarter 2024	U	U	U	U	U	U	5	5	6.2	6020B
Cobalt CAS #7440-48-4										
Second Quarter 2024	U	U	U	U	U	U	5	5	5	6020B
Third Quarter 2024	U	U	U	U	U	U	5	5	5	6020B
Copper CAS #7440-50-8										
Second Quarter 2024	U	U	U	U	U	U	5	5	13	6020B
Third Quarter 2024	U	U	U	U	U	U	5	5	13	6020B
Lead CAS #7439-92-1										
Second Quarter 2024	U	U	U	U	U	U	3	3	10	6020B
Third Quarter 2024	U	U	U	U	U	U	3	3	10	6020B
Mercury CAS #7439-97-6										
Second Quarter 2024	U	U	U	U	U	U	2	2	0.2	7470A
Third Quarter 2024	U	U	U	U	U	U	2	2	0.2	7470A
Nickel CAS #7440-02-0										
Second Quarter 2024	U	U	U	U	U	U	10	10	16	6020B
Third Quarter 2024	3.1 J	U	U	U	U	U	10	10	16	6020B
Silver CAS #7440-22-4										
Second Quarter 2024	U	U	U	U	U	U	2	2	2	6020B
Third Quarter 2024	U	U	U	U	U	U	2	2	2	6020B
Vanadium CAS #7440-62-2										
Second Quarter 2024	U	U	U	U	U	U	10	10	151	6020B
Third Quarter 2024	U	U	U	U	U	U	10	10	151	6020B
Zinc CAS #7440-66-6										
Second Quarter 2024	U	U	U	U	U	U	30	30	51	6020B
Third Quarter 2024	U	U	U	U	U	U	30	30	51	6020B
Benzene CAS #71-43-2										
Second Quarter 2024	U	U	U	U	U	U	1	1	1	8260D
Third Quarter 2024	0.328 J	U	U	U	U	U	1	1	1	8260D
2-Butanone CAS #78-93-3										
Second Quarter 2024	U	U	U	U	U	U	10	10	1.1	8260D
Third Quarter 2024	U	U	U	U	U	U	10	10	1.1	8260D

See last page of this report for definitions.

Page 1 of 3



**Target Analyte Monitoring Results At Or Above Permit Quantitation Limit
HWMU-16 Plume Monitoring Wells**

Radford Army Ammunition Plant, Radford, Virginia

All Results in ug/L.

Upgradient well = 16C1

Analyte/Quarter	16C1 Q	16-2 Q	16-3 Q	16-5 Q	16WC2B Q	16SPRING Q	QL	Permit QL	Background	Method
Carbon tetrachloride CAS #56-23-5										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.2	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.2	8260D
Chloroethane CAS #75-00-3										
Second Quarter 2024	3.3	U	U	U	U	U	1	1	20.7	8260D
Third Quarter 2024	2.7	U	U	U	U	U	1	1	20.7	8260D
Dichlorodifluoromethane CAS #75-71-8										
Second Quarter 2024	U J	U J	U J	U J	U J	U J	1	1	46.5	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	46.5	8260D
1,1-Dichloroethane CAS #75-34-3										
Second Quarter 2024	5.5	U	U	U	U	U	1	1	9.5	8260D
Third Quarter 2024	5.03	U	U	U	U	U	1	1	9.5	8260D
1,1-Dichloroethene CAS #75-35-4										
Second Quarter 2024	U	U	U	U	U	U	1	1	1	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	1	8260D
Diethyl ether CAS #60-29-7										
Second Quarter 2024	38 J	U J	U J	U J	U J	U J	10	12.5	75.5	8260D
Third Quarter 2024	37 J	U	U	U	U	U	10	12.5	75.5	8260D
Diethyl phthalate CAS #84-66-2										
Second Quarter 2024	U	U	U	U	U	U	5	5	5	8270E
Third Quarter 2024	U	U	U	U	U	U	5	5	5	8270E
Dimethyl ether CAS #115-10-6										
Second Quarter 2024	U	U	U	U	U	U	10	12.5	17.0	8260C
Third Quarter 2024	8.4 J	U	U	U	U	U	10	12.5	17.0	8260C
2,4-Dinitrotoluene CAS #121-14-2										
Second Quarter 2024	U	U	U	U	U	U	10	10	10	8270E
Third Quarter 2024	U	U	U	U	U	U	10	10	10	8270E
2,6-Dinitrotoluene CAS #606-20-2										
Second Quarter 2024	U	U	U	U	U	U	10	10	10	8270E
Third Quarter 2024	U	U	U	U	U	U	10	10	10	8270E
Ethylbenzene CAS #100-41-4										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
Chloromethane CAS #74-87-3										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.3	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.3	8260D
Methylene chloride CAS #75-09-2										
Second Quarter 2024	U	U	U	U	U	U	1	1	13.95	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	13.95	8260D
Tetrachloroethene CAS #127-18-4										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.7	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.7	8260D
Tetrahydrofuran CAS #109-99-9										
Second Quarter 2024	U	U	U	U	U	U	25	25	25	8260D
Third Quarter 2024	26.9	U	U	U	U	U	25	25	25	8260D

Target Analyte Monitoring Results At Or Above Permit Quantitation Limit HWMU-16 Plume Monitoring Wells

Radford Army Ammunition Plant, Radford, Virginia

All Results in ug/L.

Upgradient well = 16C1

Analyte/Quarter	16C1 Q	16-2 Q	16-3 Q	16-5 Q	16WC2B Q	16SPRING Q	QL	Permit QL	Background	Method
Toluene CAS #108-88-3										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
1,1,1-Trichloroethane CAS #71-55-6										
Second Quarter 2024	U	U	U	U	U	U	1	1	9.2	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	9.2	8260D
Trichloroethene CAS #79-01-6										
Second Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	0.1	8260D
Trichlorofluoromethane CAS #75-69-4										
Second Quarter 2024	U	U	U	U	U	U	1	1	11.3	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	11.3	8260D
1,1,2-Trichloro-1,2,2-Trifluoroethane CAS #76-13-1										
Second Quarter 2024	U	U	U	U	U	U	1	1	1.2	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	1.2	8260D
Vinyl chloride CAS #75-01-4										
Second Quarter 2024	U	U	U	U	U	U	1	1	1	8260D
Third Quarter 2024	U	U	U	U	U	U	1	1	1	8260D
Xylenes (Total) CAS #1330-20-7										
Second Quarter 2024	U	U	U	U	U	U	3	3	0.2	8260D
Third Quarter 2024	U	U	U	U	U	U	3	3	0.2	8260D

All plume monitoring wells reported to at or above the permit quantitation limit except for the upgradient well during the Appendix IX monitoring event where results are reported for the upgradient well to at or above the detection limit (DL). All inorganics reported as total unless noted.

Q Denotes data validation qualifier.
 QL Denotes permit required quantitation limit.
 U Denotes analyte not detected at or above QL. 5/5/21 Class 1 Permit Mod; VDEQ correspondence dated 05/08/2024 (total silver)
 UA Denotes analyte not detected at or above adjusted sample QL.
 J Denotes result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above QL and QL is estimated. When used with "UA" (i.e., "UAJ"), denotes analyte not detected at or above adjusted QL and adjusted QL is estimated.
 UN Denotes analyte concentration is less than five times the blank concentration.
 Not reliably detected due to blank contamination.
 R Denotes result rejected.
 Q Denotes data validation qualifier.
Background Denotes background concentrations listed in Appendix F to Attachment 3 in the Final Hazardous Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002), (revised 2014, Dec 1, 2016, May 5, 2021, 2024 where applicable.
CAS# Denotes Chemical Abstract Services registration number.
GPS Denotes Groundwater Protection Standards listed in Appendix G to Attachment 5 in the Final Hazardous Waste Post-Closure Care Permit for Hazardous Waste Units 5 and 16 (October 4, 2002) (revised 2014, 2016, 2021, 2024 (silver).

APPENDIX B-4

ESTABLISHED BACKGROUND VALUES AND COMPUTATIONS FOR HWMU-16

- It was not understood why the majority of fluorescein detections were considered false positive detections. The basis of this observation is unclear considering a lack of background and laboratory confirmation results.
- It was not apparent why certain samples were selected for laboratory confirmation and others were not. There was no apparent consistency in the selection of samples for laboratory confirmation.
- Samples were submitted for confirmation laboratory analyses three months or more following the collection of the samples in the field. No information was provided regarding the custody and/or storage of the samples. The samples were submitted to the analytical laboratory with incomplete chain-of-custody (COC), and the COC documentation was not completed by the laboratory.

In summary, the data from the study do not provide the basis for meaningful interpretation. Any attempt to formulate conclusions from the data as presented regarding the presence of preferred or predominant groundwater flow patterns is not warranted or recommended.

3.3 HWMU-16 GROUNDWATER MONITORING ANALYTE LIST

The groundwater monitoring analyte list for HWMU-16 is presented in **Table 1 (Appendix B)**. The list represents the subset of the constituents listed in Appendix III of 40 CFR Part 261 that previously have been detected in the groundwater and/or that are reasonably expected to be in or derived from waste contained in HWMU-16. As discussed in Section 3.5.2 below, 12 inorganic constituents and two explosive/propellant constituents have been detected in the groundwater monitoring network for HWMU-16 at statistically significant concentrations above the Unit's calculated background concentrations. The inorganic constituents may be derived from the aquifer formation materials; however, the two explosive/propellant constituents (2,4-Dinitrotoluene and 2,6-Dinitrotoluene) are byproducts of wastes derived from explosives. Therefore, the two explosive/propellant constituents detected could only be from HWMU-16.

The concentration limits established for the hazardous constituents also are listed in **Table 1**. The concentration limits represent either background concentrations calculated for the constituents in this GWQAR, Maximum Concentrations of Constituents for Ground-water Protection listed in Table 1 of 40 CFR 264.94, USEPA Drinking Water Standard Maximum Contaminant Levels (MCLs), or alternate concentration limits (ACLs) established by the VDEQ (July 1998). Certain organic constituents on the list do not have USEPA MCLs or VDEQ ACLs; they also do not have calculated background concentrations because they have not been detected in the Unit's upgradient well. Therefore, the concentration limits for these constituents are equal to their respective method detection limits.

As Alliant discussed with the VDEQ in the past, the reliability of previous laboratory analytical data - particularly dissolved metals data - appeared to be questionable in some cases. In an April 9, 1996 letter to C. Jake (Alliant), the VDEQ agreed that only total metals concentrations in groundwater would be measured, as described in a USEPA Region III guidance on groundwater sampling in karst terrain. Therefore, all references to metals concentrations in this GWQAR refer to total metals concentrations.

3.4 HWMU-16 GROUNDWATER BACKGROUND CONCENTRATIONS

Background concentrations were calculated for each constituent in the groundwater monitoring program using the analytical data from 1996 through 1998 for upgradient well 16C1.

The background concentration calculations were based on site wide 95% confidence, 95% coverage upper prediction intervals. The calculated background concentrations are listed in Table 2 (Appendix B). The background concentrations were used to construct the outermost closing contours on the Isoconcentration Maps (Appendix A).

3.5 HWMU-16 STATISTICAL ANALYSIS

Statistical evaluations for HWMU-16 are performed annually and submitted to the VDEQ in accordance with the annual reporting requirements specified in 40 CFR 265.94. As part of this GWQAR, statistical evaluations were performed on Fourth Quarter 1998 analytical data in accordance with the procedures and guidance provided in the following documents:

- Title 40 of the Code of Federal Regulations, 40 CFR 264.97 and 264.98;
- VDEQ Guidance for statistical analysis titled "Data Analysis Plan," undated;
- Interim Final Guidance for Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, USEPA, April 1989;
- Addendum to Interim Final Guidance for Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, USEPA, July 1992; and
- Statistical Methods for Groundwater Monitoring, Gibbons, R.D., 1994.

Statistical threshold values were computed for the 54 constituents for which HWMU-16 is currently monitored based on the concentrations of those constituents in upgradient (background) well 16C1. All data starting with First Quarter 1996 to Fourth Quarter 1998 were used for this purpose. The 1996 through 1998 monitoring data have been submitted previously to the VDEQ by Alliant in quarterly monitoring reports; therefore, the data are not listed in this GWQAR. Statistical comparisons were performed for the Fourth Quarter 1998 data set. Comparison statistical analyses were performed for all constituents which were detected in any downgradient well during that event.

3.5.1 Background Data and Statistical Comparisons

Statistical analyses were performed using the analytical results from upgradient well 16C1 data as background data. Based on the percentage of non-detects and the distribution of the background data, methods of statistical comparisons varied. Background average, standard deviation and other descriptive statistical data were computed for all constituents and are presented in Appendix C.

The constituents listed below were 100% non-detected in the background data. The background threshold levels (BTLs) for these constituents were established as equal to their detection limits (DL). Detections of these constituents in the downgradient wells during Fourth Quarter 1998 were compared to these BTLs.

Background Threshold Level (BTL) = Detection Limit (DL)				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Antimony	12	100	3	3
Arsenic	12	100	1	1
Bromoform	12	100	0.3	0.3
Carbon tetrachloride	12	100	0.2	0.2
Chlorobenzene	12	100	0.1	0.1
Chloromethane	12	100	0.3	0.3
Cyanide	12	100	10	10

Background Threshold Level (BTL) = Detection Limit (DL)				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Di-n-butyl phthalate	12	100	5	5
1,2-Dichloroethane	12	100	0.1	0.1
trans-1,2-Dichloroethene	12	100	0.1	0.1
1,4-Dichlorobenzene	12	100	0.1	0.1
Ethylbenzene	12	100	0.1	0.1
Mercury	12	100	0.2	0.2
Methyl ethyl ketone	12	100	1.1	1.1
Selenium	12	100	1	1
1,1,2,2-Tetrachloroethane	12	100	0.3	0.3
1,1,2-Trichloroethane	12	100	0.5	0.5
Trichloroethene	12	100	0.1	0.1
Toluene	12	100	0.1	0.1
2378-TCDF	12	100	0.0485 ppt	0.0485 ppt
12378-PECDF	12	100	0.0439 ppt	0.0439 ppt
23478-PECDF	12	100	0.0417 ppt	0.0417 ppt
123478-HXCDF	12	100	0.0390 ppt	0.0390 ppt
123678-HXCDF	12	100	0.0377 ppt	0.0377 ppt
234678-HXCDF	12	100	0.0428 ppt	0.0428 ppt
123789-HXCDF	12	100	0.0415 ppt	0.0415 ppt
1234678-HPCDF	12	100	0.0615 ppt	0.0615 ppt
1234789-HPCDF	12	100	0.0709 ppt	0.0709 ppt
OCDF	12	100	0.1307 ppt	0.1307 ppt

Non-parametric prediction intervals were computed for all of the constituents for which the data from background well 16C1 satisfied one of the following two criteria, per VDEQ regulations and guidance as well as USEPA guidance:

- Percentage of non-detects was greater than or equal to 50 and less than 100; or
- Percentage of non-detects was less than 50, but data was not normally distributed in original or log-transformed mode.

The background threshold levels for these constituents were set as equal to their upper prediction limits (UPLs). The background and relevant statistical data for these constituents are summarized below. The confidence level and false positive rate were calculated based on the number of background data points available and number of future comparisons. For all constituents, the confidence level was determined to be equal to 0.933, and the false positive rate was equal to 0.067. Since the upper control limit of a non-parametric interval cannot be adjusted for multiple comparisons and inadequate number of background data, the number of resampling events required was adjusted to account for the high error rates inherent in those situations. The number of confirmation resamples required for all constituents is 2. The background and relevant statistical data for these constituents are summarized below. Associated statistical computations are presented in **Appendix C**.

BTL = Upper Prediction Limit of Non-parametric Prediction Interval w/false positive rate=0.067				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Beryllium	12	75	0.2	0.7
Cadmium	12	75	0.1	0.2
Cobalt	12	75	1	5
Copper	12	50	1	13
1,1-Dichloroethane	12	0	0.2	9.5
2,4-Dinitrotoluene	12	92	0.08	0.10

BTL = Upper Prediction Limit of Non-parametric Prediction Interval w/false positive rate=0.067				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
2,6-Dinitrotoluene	12	75	0.08	0.11
Lead	12	42	1	10
Nickel	12	92	15	16
Silver	12	75	0.2	0.5
Thallium	12	67	1	6
TOC	12	75	1000	7000
1,1,1-Trichloroethane	12	17	0.3	9.2
Vanadium	12	83	4	151
Vinyl Chloride	12	92	0.1	0.1
Xylene (total)	12	92	0.1	0.2
Zinc	12	50	5	51

Chromium exhibited normally distributed data (excluding non-detects) with between 25% and 50% non-detects in the background well. The mean and standard deviation of the background data for chromium were adjusted using Cohen's Maximum Likelihood Estimator Method (1959, 1961). A one-sided parametric prediction interval was then computed for chromium based on the adjusted mean and standard deviation. The Upper Prediction Limit was set as the BTL for chromium. The background and relevant statistical data for chromium are summarized below. Cohen's adjustment computations and prediction interval computations are presented in Appendix C.

BTL = Upper Prediction Limit of Prediction Interval w/false positive rate=0.05 Original Mean = 3.54, Original SD = 1.933 Adjusted Mean = 3.642, Adjusted SD = 1.95				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Chromium	12	25	1	6.2

The following constituents exhibited normally distributed background data with less than 25% non-detects. One sided parametric prediction intervals were computed on the background data for all of these constituents. The UPLs for these constituents were set as their respective BTLs, with one exception. For pH, a two-sided parametric prediction interval was computed; therefore, the BTL for pH consisted of a range between the lower prediction limit (LPL) and the upper prediction limit. The background concentration calculations were based on a site wide 95% confidence, 95% coverage upper prediction intervals. When adjusted for multiple comparisons of the background data, the minimum required false positive rate was below 1% (0.01). A 99% confidence level (0.01 false positive rate) was used for all individual comparisons, which with the most conservative assumptions provided a site-wide false positive rate of >0.05 for all constituents. The background and relevant statistical data for these constituents are summarized below. The prediction interval computations for these constituents are presented in Appendix C.

BTL = UPL of one-sided Prediction Interval (exception pH) w/site-wide false positive rate>0.05 (individual comparisons false positive rate=0.01) BTL for pH = LPL - UPL of two-sided Prediction Interval				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Barium	12	0	2	175.4
Dichlorodifluoromethane	12	8	0.3	46.5
Tetrachloroethene	12	17	0.1	0.7
TOX	12	17	5	42.2

BTL = UPL of one-sided Prediction Interval (exception pH) w/site-wide false positive rate>0.05 (individual comparisons false positive rate=0.01) BTL for pH = LPL - UPL of two-sided Prediction Interval				
Parameter	Sample Size	% Non-Detects	DL (µg/l)	BTL (µg/l)
Trichlorofluoromethane	12	0	0.5	11.3
Specific Conductivity	8	0	1 µS/cm	672 µS/cm
pH	8	0	0.1 pH units	5.7 to 7.9 pH units

3.5.2 Results of Statistical Comparisons

The following table lists the constituents which were detected during the Fourth Quarter 1998 event at concentrations exceeding their respective background threshold levels (BTLs), and the downgradient wells in which they were detected.

Parameter	Monitoring Well(s)
Arsenic	16-5, 16WC2B
Barium	16-2, 16-3, 16-5, 16WC1A, 16WC1B, 16WC2B, 16SPRING
Beryllium	16WC1B, 16WC2B
Cadmium	16WC1B
Chromium	16-3, 16-5, 16WC1B, 16WC2B
Cobalt	16-5, 16WC1B, 16WC2B
Copper	16-5, 16WC1B, 16WC2B
Lead	16WC1B
Mercury	16WC1B
Nickel	16-5, 16WC1A, 16WC2B
Selenium	16-5, 16WC1B, 16WC2B
Zinc	16WC1B
2,4-Dinitrotoluene	16-3, 16-5, 16WC1B, 16WC2B, 16SPRING
2,6-Dinitrotoluene	16WC1A, 16WC1B

Any HWMU-16 target constituents not listed above were not detected in the downgradient monitoring wells at concentrations exceeding their respective BTLs.

3.6 HWMU-16 PLUME DELINEATIONS

In accordance with VDEQ instructions presented during the May 19, 1999 meeting between Alliant and the VDEQ, Isoconcentration Maps were produced to depict constituent plumes in the groundwater beneath the site (Appendix A). In order to evaluate the shape and position of constituent plumes over time, historical Isoconcentration Maps were developed using the historical maximum concentrations for the constituents monitored at the site for the time periods of 1992 through 1995 and 1996 through 1998. The historical maximum concentrations for these time periods are listed in Tables 3 and 4, respectively (Appendix B).

Groundwater analytical data collected prior to 1992 were not included in the evaluation of historical maximum concentrations. The data collected prior to 1992 are considered unreliable due to "order-of-magnitude" variations in parameter concentrations from quarter to quarter, as well as a general lack of laboratory QA/QC. Additionally, the groundwater monitoring analyte lists prior to 1992 did not include many of the parameters on the current groundwater monitoring analyte list for HWMU-16.

TABLE 2
HWMU-16
Calculated Background Values

Constituent	Background Concentration (µg/l unless otherwise noted)
Antimony	3
Arsenic	1
Barium	175.4
Beryllium	0.7
Cadmium	0.2
Chromium	6.2
Cobalt	5
Copper	13
Lead	10
Mercury	0.2
Nickel	16
Selenium	1
Silver	0.5
Thallium	6
Vanadium	151
Zinc	51
Bromoform	0.3
Carbon Tetrachloride	0.2
Chlorobenzene	0.1
Chloromethane	0.3
1,4-Dichlorobenzene	0.1
Dichlorodifluoromethane	46.5
1,1-Dichloroethane	9.5
1,2-Dichloroethane	0.1
trans-1,2-Dichloroethene	0.1
Ethylbenzene	0.1
Methyl Ethyl Ketone	1.1
1,1,2,2-Tetrachloroethane	0.3
Tetrachloroethene	0.7
Toluene	0.1
1,1,1-Trichloroethane	9.2
1,1,2-Trichloroethane	0.5
Trichloroethene	0.1
Trichlorofluoromethane	11.3
Vinyl Chloride	0.1
Xylenes (total)	0.2

TABLE 2
HWMU-16
Calculated Background Values

Constituent	Background Concentration (µg/l unless otherwise noted)
Di-n-butylphthalate	5
2,4-Dinitrotoluene	0.10
2,6-Dinitrotoluene	0.11
2378-TCDF	0.0485 ppt
12378-PECDF	0.0439 ppt
23478-PECDF	0.0417 ppt
123478-HXCDF	0.0390 ppt
123678-HXCDF	0.0377 ppt
234678-HXCDF	0.0428 ppt
123789-HXCDF	0.0415 ppt
1234678-HPCDF	0.0615 ppt
1234789-HPCDF	0.0709 ppt
OCDF	0.1307 ppt
Cyanide	10
Total Organic Carbon (x4)	7000
Total Organic Halides (x4)	42.2
Specific Conductivity	672 µS/cm
pH	5.7 to 7.9 pH units

Appendix IX Constituents Detected Since Permit Issuance
HWMUs 5, 7, 10, and 16
Radford Army Ammunition Plant

Unit	Quarter Initially Detected	Constituent	Background--Calculated or QL?	Background (ug/L)	GPS Required? (261 Appendix VIII)	Proposed GPS (ug/L)	Source
HWMU-5	Fourth Quarter 2003	Chromium	QL	5	yes	100	USEPA MCL
		Diethyl Ether	QL	12	no	NA	NA
		2-Nitroaniline	QL	20	no	NA	NA
		4-Nitroaniline	QL	20	yes	20	Background/QL
	Third Quarter 2006	Nitrobenzene	QL	10	yes	10	Background/QL
		Dichlorodifluoromethane	QL	1	yes	125.2	VDEQ ACL
HWMU-7	Third Quarter 2003	Copper	Calculated	49	no	NA	NA
	Second Quarter 2004	Zinc	Calculated	217	no	NA	NA
HWMU-10	First Quarter 2003	Cobalt	QL	5	no	NA	NA
	Second Quarter 2003	Vanadium	QL	10	no	NA	NA
	Second Quarter 2005	Acetone	QL	10	no	NA	NA
		2-Propanol	QL	50	no	NA	NA
HWMU-16	Second Quarter 2003	Chloroethane	Calculated	20.7	yes	20.7	Background/QL
		Diethyl Ether	Calculated	75.5	no	NA	NA
		Dimethyl Ether	Calculated	17.0	no	NA	NA
	Third Quarter 2003	Methylene Chloride	Calculated	13.95	no*	NA	NA
	Second Quarter 2004	1,1,2-Trichloro-1,2,2-trifluoroethane	Calculated	1.2	no*	NA	NA

HWMU-5: The additional Appendix IX constituents detected in the downgradient point of compliance wells were not detected above their respective Quantitation Limits (QLs) in the upgradient well. As a result, background concentrations for those constituents were set as equal to their respective QLs. In accordance with the Permit (Condition V.J.1.g.), GPS are proposed for those additional Appendix IX constituents that are listed in Appendix VIII of 40 CFR Part 261 (chromium, 4-nitroaniline, nitrobenzene, and dichlorodifluoromethane). No GPS are proposed for the additional Appendix IX constituents that are not listed in Appendix VIII of 40 CFR Part 261 (diethyl ether and 2-nitroaniline).

HWMU-7: Background concentrations for the additional Appendix IX constituents detected in the downgradient point of compliance wells (copper and zinc) were previously calculated and submitted to the VDEQ in the August 1998 *Groundwater Quality Assessment Report for HWMU-7* prepared by ERM, Inc. In accordance with the Permit (Condition V.J.2.g.), no GPS are proposed for the additional Appendix IX constituents (copper and zinc), as they are not listed in Appendix VIII of 40 CFR Part 261.

HWMU-10: The additional Appendix IX constituents detected in the downgradient point of compliance wells were not detected above their respective Quantitation Limits (QLs) in the upgradient well. As a result, background concentrations for those constituents were set as equal to their respective QLs. In accordance with the Permit (Condition V.J.3.g.), no GPS are proposed for the additional Appendix IX constituents (cobalt, vanadium, acetone, and 2-propanol), as they are not listed in Appendix VIII of 40 CFR Part 261.

HWMU-16: Background concentrations for additional Appendix IX constituents chloroethane, diethyl ether, dimethyl ether, and methylene chloride were calculated using data collected from upgradient well 16C1 during the period from Third Quarter 2003 through Third Quarter 2004. The background concentration for additional Appendix IX constituent 1,1,2-trichloro-1,2,2-trifluoroethane was calculated using data collected from upgradient well 16C1 during the period from Second Quarter 2004 through Third Quarter 2006. In accordance with the Permit (Condition V.J.4.g.), GPS are proposed for additional Appendix IX constituents that are listed in Appendix VIII of 40 CFR Part 261 (chloroethane). No GPS are proposed for the additional Appendix IX constituents that are not listed in Appendix VIII of 40 CFR Part 261 (diethyl ether and dimethyl ether).

*Methylene chloride and 1,1,2-trichloro-1,2,2-trifluoroethane should not be added to the Groundwater Monitoring List for HWMU-16, as these constituents were only detected in the upgradient well for the Unit, and not in the downgradient point of compliance wells.

Statistical Computations – RAAP HWMU-16 – 1,1,2-Trichloro-1,2,2-Trifluoroethane

In accordance with the facility permit and VHWMR, statistical background concentration is being established for 1,1,1-Trichloro-1,2,2-Trifluoroethane. Inter-well upper prediction limits (UPL) were calculated on the background data for this target parameter in accordance with the facility permit and VHWMR (40 CFR 264.97(h)). Background data for this target parameter consisted of all data for the background well 16C1 collected from 2nd quarter 2004 through 3rd quarter 2006.

Discussion of Tests for Normality

The power of a statistical tool to account for false positive and false negative results, while accurately detecting true statistical variations for a facility under scrutiny depends on numerous factors, one of which is the distribution of the data. A great number of statistical tools are based on the assumption that data are normally distributed. Hence the distribution of the sample population for parameters evaluated under this statistical analysis is first determined. Sample populations are tested for normal distribution using several normality tests. "Groundwater Information Tracking System with Statistical Analysis Capability" (GRITS/STAT) v5.0 was the software used to run these statistical tests. GRITS/STAT is an analytical software package provided by the USEPA. The distributions of the data sets were verified in the original mode as well as in log-transformed mode. The normality of the data set was evaluated using the Shapiro-Wilk test for normality.

Discussion of Prediction Interval Tests

Normality tests are performed prior to running parametric tests (tests that require that the data be normal). Results of the normality tests show that the background data for 1,1,2-Trichloro-1,2,2-Trifluoroethane is non-normally distributed. Non-parametric UPL (NUPL) was constructed on the background data for this parameter. The confidence levels of NUPLs are typically approximate and estimated to be around 91%.

Summary of UPL

Parameter	Background Data Distribution	Type of UPL	Multiple Comparisons/year	UPL (µg/l)
1,1,2-Trichloro-1,2,2-Trifluoroethane	Non-Normal	NUPL	N/A	1.2

Statistical Computations – RAAP HWMU-16

In accordance with the facility permit and VHWMR, statistical background concentrations are being established for the four new target parameters chloroethane, diethyl ether, dimethyl ether and methylene chloride. These four target parameters were added to the facility monitoring program during the 3rd quarter 2003 monitoring event. Inter-well upper prediction limits (UPL) were calculated on the background data for the target parameters in accordance with the facility permit and VHWMR (40 CFR 264.97(h)). Background data for these target parameters consisted of all data for the background well 16C1 collected from 3rd quarter 2003 through 3rd quarter 2004.

Discussion of Tests for Normality

The power of a statistical tool to account for false positive and false negative results, while accurately detecting true statistical variations for a facility under scrutiny depends on numerous factors, one of which is the distribution of the data. A great number of statistical tools are based on the assumption that data are normally distributed. Hence the distribution of the sample population for parameters evaluated under this statistical analysis is first determined. Sample populations were tested for normal distribution using several normality tests. "Groundwater Information Tracking System with Statistical Analysis Capability" (GRITS/STAT) v5.0 was the software used to run these statistical tests. GRITS/STAT is an analytical software package provided by the USEPA. The distributions of the data sets were verified in the original mode as well as in log-transformed mode. The normality of the data sets was evaluated using the Shapiro-Wilk test for normality.

Discussion of Prediction Interval Tests

Normality tests are performed prior to running parametric tests (tests that require that the data be normal). A 99% confidence parametric inter-well UPL was computed for each of the four target parameters that showed normally distributed background data. Results of the normality tests show that the background data for chloroethane, diethyl ether and methylene chloride are normally distributed, and the background data for dimethyl ether is non-normally distributed. Non-parametric UPL (NUPL) was constructed on the background data for dimethyl ether, and parametric UPLs (PUPL) were constructed on the background data for chloroethane, diethyl ether and methylene chloride. No adjustments to the error rates were made to the NUPLs for multiple comparisons. Adjustment for 10 comparisons per year (considering 10 compliance monitoring wells at the facility and 4 quarters of data for each year, and considering historic detects, 10 is considered a representative number for multiple comparisons per year) was made to the PUPLs. The confidence levels of NUPLs are well less than 95%. Any statistically significant increase (SSI) must be confirmed by verification sampling.

Summary of UPLs

Parameter	Background Data Distribution	Type of UPL	Multiple Comparisons/year	UPL (µg/l)
Chloroethane	Normal	PUPL	10	20.7
Diethyl ether	Normal	NUPL	10	75.5
Dimethyl ether	Non-normal	PUPL	N/A	17.0
Methylene Chloride	Normal	PUPL	10	13.95

RAAP-HWMU-16 - Statistical Analysis - Notes

1) Y2K Correction dates are as shown in table below.

Actual Event	Date Used in Stat Software
2000-Qtr1	12/13/1999
2000-Qtr2	12/14/1999
2000-Qtr3	12/15/1999
2000-Qtr4	12/16/1999
2001-Qtr1	12/17/1999
2003-Qtr3	12/18/1999
2003-Qtr4	12/19/1999
2004-Qtr1	12/20/1999
2004-Qtr2	12/21/1999
2004-Qtr3	12/22/1999

Interwell Tests:

2) Background data for target parameters chloroethane, diethyl ether, dimethyl ether and methylene chloride were evaluated using Shapiro-Wilk test. Background data showed normal distribution for chloroethane, diethyl ether and methylene chloride. Parametric interwell 99% confidence upper prediction limits were computed for parameters with normally distributed background data. Dimethyl ether background data was non-normally distributed. Therefore non-parametric Upper Prediction Limit (UPL) was computed for dimethyl ether.

3) No adjustments for multiple comparisons could be made for non-parametric UPLs. Adjustments were made to the parametric UPLs for 10 future comparisons per year to account for multiple compliance monitoring wells and quarterly event data. Any Statistically significant increase (SSI) must be confirmed by verification sampling.

Normality Tests

Report Printed: 02-02-2005 13:49

Facility:RAAPHWMU16 Haz. Waste Unit 16 - RAAP

Address:

City:Radford ST:VA Zip:24141
County:PULASKI

Contact:

Phone:() -

Permit Type:Detection

Constituent:ClEthane Chloroethane

CAS Number: 75-00-3

MCL: 0.000 ppb

ACL: 0.000 ppb

Detect Limit: 2.000 ppb

Start Date:Mar 31 1996

End Date:Dec 22 1999

Normality Test on Observations for wells listed below:

Well:16C1 Position:Upgradient Observations:5

Scale	Minimum	Maximum	Mean	Std Dev
Original:	1.000	6.400	4.340	2.078
Log:	0.000	1.856	1.303	0.749

Pooled Statistics

Observations: 5

Statistic	Original Scale	Log Scale
Mean:	4.340	1.303
Std Dev:	2.078	0.749
Skewness:	-0.810	-1.296*
Kurtosis:	-0.555	-0.011
Minimum:	1.000	0.000
Maximum:	6.400	1.856
CV:	0.479	0.575

Shapiro-Wilk Statistics

Scale	Test Statistic	5% Critical Value	1% Critical Value
Original:	0.9037	0.7620	0.6860

Log: 0.7615* 0.7620 0.6860

* Indicates statistically significant evidence of non-normality.
GRIT/STAT Version 5.0

Parametric Prediction Interval
Report Printed February 2, 2005

Page 1

Facility: Haz. Waste Unit 16 - RAAP
Parameter: Chloroethane (CAS Number: 75-00-3)

ONE-TAILED UPPER PARAMETRIC PREDICTION INTERVAL

Observations (n):	5
Shapiro-Wilk (W):	0.9037
Critical W, $\alpha=0.01$:	0.6860
Mean:	4.340 ppb
Std Dev:	2.078 ppb
DF:	4
Conf. Level (1- α):	0.9500 0.99
Future Samples (k):	10
$t_{\left[\frac{1-\alpha}{k} \right]}$:	7.1732
Kappa:	7.8579
UL:	20.669 ppb
LL:	$-\infty$

Normality Tests

Report Printed: 02-02-2005 13:49

Facility:RAAPHWMU16 Haz. Waste Unit 16 - RAAP

Address:

City:Radford ST:VA Zip:24141
County:PULASKI

Contact:

Phone:() -

Permit Type:Detection

Constituent:DEthEth Diethyl ether

CAS Number: - -

MCL: 0.000 ppb

ACL: 0.000 ppb

Detect Limit: 24.000 ppb

Start Date:Mar 31 1996

End Date:Dec 22 1999

Normality Test on Observations for wells listed below:

Well:16C1 Position:Upgradient Observations:5

Scale	Minimum	Maximum	Mean	Std Dev
Original:	12.000	30.000	21.200	6.907
Log:	2.485	3.401	3.007	0.355

Pooled Statistics

Observations: 5

Statistic	Original Scale	Log Scale
Mean:	21.200	3.007
Std Dev:	6.907	0.355
Skewness:	-0.122	-0.491
Kurtosis:	-1.140	-1.024
Minimum:	12.000	2.485
Maximum:	30.000	3.401
CV:	0.326	0.118

Shapiro-Wilk Statistics

	Test	5% Critical	1% Critical
Scale	Statistic	Value	Value
Original:	0.9768	0.7620	0.6860

Log: 0.9507 0.7620 0.6860

* Indicates statistically significant evidence of non-normality.
GRIT/STAT Version 5.0

Parametric Prediction Interval
Report Printed February 2, 2005

Page 1

Facility: Haz. Waste Unit 16 - RAAP
Parameter: Diethyl ether (CAS Number: - -)

ONE-TAILED UPPER PARAMETRIC PREDICTION INTERVAL

Observations (n):	5
Shapiro-Wilk (W):	0.9768
Critical W, $\alpha=0.01$:	0.6860
Mean:	21.200 ppb
Std Dev:	6.907 ppb
DF:	4
Conf. Level (1- α):	0.9500 0.99
Future Samples (k):	10
$t_{\left[\frac{1-\alpha}{k} \right]}$:	7.1732
Kappa:	7.8579
UL:	75.470 ppb
LL:	$-\infty$

Normality Tests

Report Printed: 02-02-2005 13:53

Facility:RAAPHWMU16 Haz. Waste Unit 16 - RAAP

Address:

City:Radford ST:VA Zip:24141
County:PULASKI

Contact:

Phone:() -

Permit Type:Detection

Constituent:DMethEth Dimethyl ether

CAS Number: - -

MCL: 0.000 ppb

ACL: 0.000 ppb

Detect Limit: 24.000 ppb

Start Date:Mar 31 1996

End Date:Dec 22 1999

Normality Test on Observations for wells listed below:

Well:16C1 Position:Upgradient Observations:5

Scale	Minimum	Maximum	Mean	Std Dev
Original:	12.000	17.000	13.000	2.236
Log:	2.485	2.833	2.555	0.156

Pooled Statistics

Observations: 5

Statistic	Original Scale	Log Scale
Mean:	13.000	2.555
Std Dev:	2.236	0.156
Skewness:	1.500*	1.500*
Kurtosis:	0.250	0.250
Minimum:	12.000	2.485
Maximum:	17.000	2.833
CV:	0.172	0.061

Shapiro-Wilk Statistics

	Test	5% Critical	1% Critical
Scale	Statistic	Value	Value
Original:	0.5521*	0.7620	0.6860

Log: 0.5521* 0.7620 0.6860

* Indicates statistically significant evidence of non-normality.

GRIT/STAT Version 5.0

Nonparametric Prediction Interval
Report Printed February 2, 2005

Page 1

Facility: Haz. Waste Unit 16 - RAAP
Parameter: Dimethyl ether (CAS Number: - -)

ONE-TAILED UPPER PARAMETRIC PREDICTION INTERVAL

Observations (n):	5
Conf. Level (1- α):	33.330%
UL:	17.000 ppb
LL:	0.000

Normality Tests

Report Printed: 02-02-2005 13:54

Facility:RAAPHWMU16 Haz. Waste Unit 16 - RAAP

Address:

City:Radford ST:VA Zip:24141
County:PULASKI

Contact:

Phone:() -

Permit Type:Detection

Constituent:MeCl Dichloromethane (Methylene chloride)

CAS Number: 75-09-2

MCL: 0.000 ppb

ACL: 0.000 ppb

Detect Limit: 2.000 ppb

Start Date:Mar 31 1996

End Date:Dec 22 1999

Normality Test on Observations for wells listed below:

Well:16C1 Position:Upgradient Observations:5

Scale	Minimum	Maximum	Mean	Std Dev
Original:	4.100	6.800	5.800	1.037
Log:	1.411	1.917	1.743	0.197

Pooled Statistics

Observations: 5

Statistic	Original Scale	Log Scale
Mean:	5.800	1.743
Std Dev:	1.037	0.197
Skewness:	-0.925	-1.088*
Kurtosis:	-0.436	-0.263
Minimum:	4.100	1.411
Maximum:	6.800	1.917
CV:	0.179	0.113

Shapiro-Wilk Statistics

	Test	5% Critical	1% Critical
Scale	Statistic	Value	Value
Original:	0.8964	0.7620	0.6860

Log: 0.8519 0.7620 0.6860

* Indicates statistically significant evidence of non-normality.

GRIT/STAT Version 5.0

Parametric Prediction Interval
Report Printed February 2, 2005

Page 1

Facility: Haz. Waste Unit 16 - RAAP
Parameter: Dichloromethane (Methylene chloride) (CAS Number: 75-09-2)

ONE-TAILED UPPER PARAMETRIC PREDICTION INTERVAL

Observations (n):	5
Shapiro-Wilk (W):	0.8964
Critical W, $\alpha=0.01$:	0.6860
Mean:	5.800 ppb
Std Dev:	1.037 ppb
DF:	4
Conf. Level (1- α):	0.9500 0.99
Future Samples (k):	10
$t_{\left[\frac{1-\alpha}{k} \right]}$:	7.1732
Kappa:	7.8579
UL:	13.947 ppb
LL:	$-\infty$

**Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells
Radford Army Ammunition Plant, Radford, Virginia**

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW3	16MW9	16WC1A	16WC1B	QL	GPS	Method
Chloroethane CAS # 75-00-3								
Third Quarter 2003	6.4	U	4.8	U	U	1	20.7	8260B
Fourth Quarter 2003	5.7	U	2.6	1.1	U	1	20.7	8260B
First Quarter 2004	U J	U J	U J	U J	U J	1	20.7	8260B
Second Quarter 2004	4.4	U	2.4	0.63 J	U	1	20.7	8260B
Third Quarter 2004	4.2	U	2	U	U	1	20.7	8260B
Fourth Quarter 2004	4.9	U	2.5	U	U	1	20.7	8260B
First Quarter 2005	7.6 J	U J	3.7 J	U J	U J	1	20.7	8260B
Second Quarter 2005	U J	U	U J	U	U	1	20.7	8260B
Third Quarter 2005	4.7 J	U J	U	U J	U J	1	20.7	8260B
Fourth Quarter 2005	4.6 J	U	2.6 J	U	U	1	20.7	8260B
First Quarter 2006	5.3	U	U	U	U	1	20.7	8260B
Second Quarter 2006	5 J	U	2 J	U	U	1	20.7	8260B
Third Quarter 2006	5	U	0.7 J	0.7 J	U	1	20.7	8260B
Fourth Quarter 2006	5.8	U	1	U	U	1	20.7	8260B
First Quarter 2007	6.1	U	1	U	U	1	20.7	8260B
Second Quarter 2007	5.2	U	1.4	U	U	1	20.7	8260B
Diethyl ether CAS # 60-29-7								
Third Quarter 2003	12 J	U	12 J	U	U	12	-	8260B
Fourth Quarter 2003	30	U	14	U	U	12	-	8260B
First Quarter 2004	24	U	U	U	U	12	-	8260B
Second Quarter 2004	23 J	U J	13 J	U J	U J	12	-	8260B
Third Quarter 2004	17	U	U	U	U	12	-	8260B
Fourth Quarter 2004	24	U J	U	U	U J	12	-	8260B
First Quarter 2005	29	U	14	U	U	12	-	8260B
Second Quarter 2005	20	U J	9.2	U J	U J	12	-	8260B
Third Quarter 2005	30	U	15	U	U	12	-	8260B
Fourth Quarter 2005	25	U	18	U	U	12	-	8260B
First Quarter 2006	19	U	U	U	U	12	-	8260B
Second Quarter 2006	17	U	U	U	U	12.5	-	8260B
Third Quarter 2006	33	1.5 J	4.3 J	4.6 J	U	12.5	-	8260B
Fourth Quarter 2006	20	U	U	U	U	12.5	-	8260B
First Quarter 2007	21	U	U	U	U	12.5	-	8260B
Second Quarter 2007	17 J	1.5 J	5.7 J	2.1 J	U J	12.5	-	8260B
Dimethyl ether CAS # 115-10-6								
Third Quarter 2003	6.6 J	U	9.9 J	U	U	12	-	8260B
Fourth Quarter 2003	U	U	U	U	U	12	-	8260B
First Quarter 2004	17 J	U J	13 J	U J	U J	12	-	8260B
Second Quarter 2004	U J	U J	6.6 J	U J	U J	12	-	8260B
Third Quarter 2004	U J	U J	U J	U J	U J	12	-	8260B
Fourth Quarter 2004	16 J	U J	12 J	U	U J	12	-	8260B
First Quarter 2005	26	U	25	U	U	12	-	8260B
Second Quarter 2005	15	U	14	U	U	12	-	8260B
Third Quarter 2005	13	U	U	U	U	12	-	8260B
Fourth Quarter 2005	U	U	U	U	U	12	-	8260B
First Quarter 2006	U	U	U	U	U	12	-	8260B
Second Quarter 2006	U	U	U	U	U	12.5	-	8260B
Third Quarter 2006	11 J	U J	3.2 J	2.8 J	U J	12.5	-	8260B
Fourth Quarter 2006	U	U	U	U	U	12.5	-	8260B
First Quarter 2007	U	U	U	U	U	12.5	-	8260B
Second Quarter 2007	11 J	U	7 J	2.6 J	1.2 J	12.5	-	8260B

See last page of this report for definitions.

**Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells
Radford Army Ammunition Plant, Radford, Virginia**

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	OL	GPS	Method
Methylene chloride CAS # 75-09-2								
Third Quarter 2003	4.1	U	U	U	U	1	13.95	8260B
Fourth Quarter 2003	6.8	U	U	U	U	1	13.95	8260B
First Quarter 2004	6.4	U	U	U	U	1	13.95	8260B
Second Quarter 2004	5.7	U	U	U	U	1	13.95	8260B
Third Quarter 2004	6	U A	U A	U A	U A	1	13.95	8260B
Fourth Quarter 2004	6.4	U	U	U	U	1	13.95	8260B
First Quarter 2005	6.8 J	U	U	U	U	1	13.95	8260B
Second Quarter 2005	6.3	U	U	U	U	1	13.95	8260B
Third Quarter 2005	6.2	U	U	U	U	1	13.95	8260B
Fourth Quarter 2005	4.7	U	U	U	U	1	13.95	8260B
First Quarter 2006	4.9	U	U	U	U	1	13.95	8260B
Second Quarter 2006	7	U	U	U	U	1	13.95	8260B
Third Quarter 2006	U N	U N	U N	U N	U N	1	13.95	8260B
Fourth Quarter 2006	U A	U	U	U A	U	1	13.95	8260B
First Quarter 2007	6.3	U	U	U	U	1	13.95	8260B
Second Quarter 2007	3.4	U	U	U	U	1	13.95	8260B
1,1,2-Trichloro-1,2,2-Trifluoroethane CAS # 76-13-1								
Third Quarter 2003	U	U	U	U	U	1	-	8260B
Second Quarter 2004	1.2	U J	U J	U J	U J	1	-	8260B
Third Quarter 2004	U	U	U	U	U	1	-	8260B
Fourth Quarter 2004	U	U	U	U	U	1	-	8260B
First Quarter 2005	1	U	U	U	U	1	-	8260B
Second Quarter 2005	U	U	U	U	U	1	-	8260B
Third Quarter 2005	U	U	U	U	U	1	-	8260B
Fourth Quarter 2005	U	U	U	U	U	1	-	8260B
First Quarter 2006	U	U	U	U	U	1	-	8260B
Second Quarter 2006	U	U	U	U	U	1	-	8260B
Third Quarter 2006	U	U	U	U	U	1	-	8260B
Fourth Quarter 2006	U	U	U	U	U	1	-	8260B
First Quarter 2007	U	U	U	U	U	1	-	8260B
Second Quarter 2007	U	U	U	U	U	1	-	8260B

Target Analyte Monitoring Results - HWMU-16 Point of Compliance Wells **Radford Army Ammunition Plant, Radford, Virginia**

Upgradient well = 16C1

All Results in ug/L.

Analyte/Quarter	16C1	16MW8	16MW9	16WC1A	16WC1B	OL	GPS	Method
-----------------	------	-------	-------	--------	--------	----	-----	--------

Definitions: QL Denotes permit required quantitation limit. U Denotes analyte not detected at or above QL. UA Denotes analyte not detected at or above adjusted sample QL. J Denotes associated result is estimated. When used with "U" (i.e., "UJ"), denotes analyte not detected at or above QL and QL is estimated. When used with "UA" (i.e., "UAJ"), denotes analyte not detected at or above adjusted QL and adjusted QL is estimated. UN Denotes analyte concentration is less than the quantitation limit and five times the blank concentration. Not reliably detected due to blank contamination. This qualifier used only for Appendix IX monitoring event when results are reported to at or above the project detection limit. R Denotes result rejected. Q Denotes data validation qualifier. CAS# Denotes Chemical Abstract Services registration number. X Denotes mass spectral confirmation not obtained-result suspect.

GPS Denotes Groundwater Protection Standards listed in Appendix G to Attachment 5 in the Final Hazardous Waste Post-Closure Care Permit for Hazardous Waste Units 5, 7, 10, and 16 (October 4, 2002).

NS denotes not sampled. **NA** denotes not analyzed. "—" denotes not detected (pre-2nd Quarter 2003) or not available / not sampled (beginning 2nd Quarter 2003).

Notes:

-Appendix IX Groundwater Monitoring Events:

Third Quarter 2003, Second Quarter 2004, Second Quarter 2005, Third Quarter 2006, Second Quarter 2007

For Appendix IX monitoring events, all results evaluated to detection limit. See laboratory data deliverable for detection limit.

-9/30/2003: Verification sampling event for 16C1 (heptachlor) and 16C1B (Endrin). Verification results: all results reported not detected to detection limit. Original results 0.067 µg/l and 0.39 µg/l, respectively. Confirmation results reported in this table.

-9/30/2003: Verification sampling event for 16C1 (chloroethane, ethyl ether, methyl ether, methylene chloride) and 16MW9 (chloroethane, ethyl ether, methyl ether). Verification results: all results confirmed original analysis. Original results reported in this table.

-June 21, 2004: Verification event for 8260B 16C1 (1,1-dichloroethene and 1,1,2-trichloro-1,2,2-trifluoroethane).

Verification results: all not detected except 1,1,2-trichloro-1,2,2-trifluoroethane added to quarterly analyte list beginning 3Q 2004.

Due to laboratory error, Appendix IX results for semivolatiles (Method 8270C) will be presented in 3Q 2004. Verification event results for 16WC1B and 16C1 (8081A) — all verification results were not confirmed.

-07/27-28/2005. Verification event for 16WC1B (Mercury Method 7470A.) Not detected in verification sample.

Also, verification event for 16C1, 16WC1B-8081A. and 16C1, 16MW9, 16WC1A-ethanol. All verification results not detected. Verification results used.

-06/19/2007. Verification event for 16WC1B and 16MW9 thallium Not detected in verification sample. Verification results used.

Ross Miller

From: Flint, Jeremy <Jeremy.Flint@ATK.COM>
Sent: Friday, January 20, 2012 2:23 PM
To: Powers, Loretta
Cc: Janet Frazier; Kathy Olsen; Mike Lawless; Ross Miller
Subject: FW: VA1210020730, RAAP, Additional App. IX GW Mont Results PCC HWMU 5,7,10,16, Final Notification

Loretta,

Please file the attached e-mail as an answer to ATK letter number 11-815-106

Thank You
Jeremy Flint
Lead Compliance Engineer
Environmental Affairs Department
Alliant Techsystems Inc.
P.O. Box 1
Radford, VA 24143
Phone: 540 - 639 - 7668
Fax: 540 - 639 - 8109

"Together Everyone Accomplishes More." (TEAM)

From: Maiden, Vince (DEQ) [<mailto:Vincent.Maiden@deq.virginia.gov>]
Sent: Friday, January 20, 2012 10:26 AM
To: Flint, Jeremy
Cc: McKenna, Jim; Schneider, Jutta (DEQ)
Subject: VA1210020730, RAAP, Additional App. IX GW Mont Results PCC HWMU 5,7,10,16, Final Notification

Jeremy:

The Department has received the referenced August 1, 2011 document. The notification indicates the benzene was confirmed in 16MW and recommended that this constituent be added to the compliance monitoring list for HWMU-16. In addition, the facility recommended that the background for benzene be established at the LOQ of 1µg/l and the groundwater protection standard be set at 5µg/l based on the MCL. The Department agrees with the recommendations. It appears that these changes were included in the permit renewal application dated September 15, 2011. The Department will formally address those changes along with others in the permit renewal process. If you have any questions please feel free to contact me.

Vincent Maiden
Corrective Action Project Manager
Virginia Department of Environmental Quality
Office of Remediation Programs
629 East Main Street or P.O. Box 1105
Richmond, VA 23218 Richmond, VA 23219
(276) 676-4867
Vincent.Maiden@deq.virginia.gov



COMMONWEALTH of VIRGINIA

DEPARTMENT OF ENVIRONMENTAL QUALITY

Street address: 629 East Main Street, Richmond, Virginia 23219

Mailing address: P.O. Box 1105, Richmond, Virginia 23218

www.deq.virginia.gov

Molly Joseph Ward
Secretary of Natural Resources

David K. Paylor
Director

(804) 698-4000
1-800-592-5482

Office of Waste Permitting and Compliance

Land Protection and Remediation Division

September 12, 2014

VIA ELECTRONIC MAIL

Mr. Jay Stewart
Environmental Manager
BAE Systems, Ordnance Systems, Inc.
Radford Army Ammunition Plant
4050 Pepper's Ferry Road
Radford, Virginia 24141

Re: Radford Army Ammunition Plant, Radford, VA
EPA ID No.VA1210020730, Approval of Class 1 Permit Modifications
Hazardous Waste Management Units 5 and 16, Post Closure-Care Permit

Dear Mr. Stewart:

Enclosed are the final Class 1 Modifications to the Hazardous Waste Permit for Post Closure-Care of two hazardous waste management units (HWMUs) 5 and 16 at the Radford Army Ammunition Plant (RAAP), Radford, Virginia facility. The final Class 1 Modifications to the Permit have been approved.

The Virginia Department of Environmental Quality (DEQ) received the Class 1 Permit groundwater related modification request addressing the HWMU 16 that was communicated to the DEQ in an e-mail dated August 13, 2014, from the RAAP, Radford, Virginia facility. RAAP requested that 1,1-dichloroethene (1,1-DCE) be added to the Groundwater Compliance Monitoring Constituent List for HWMU-16.

1,1-DCE was detected in the most recent annual groundwater sampling event required under the Post-Closure Permit, and in a letter dated July 21, 2014, the VDEQ supported the RAAP's July 1, 2014, proposal that 1,1-DCE be added to the Groundwater Compliance Monitoring Constituent List and also the setting of the background value for 1,1-DCE at the Limit of Quantitation (LOQ) value of 1

ug/l and the Groundwater Protection Standard (GPS) at the USEPA Maximum Contaminant Level (MCL) of 7 ug/l.

In the e-mail letter dated August 13, 2014, RAAP submitted the following requested changes to the facility's hazardous waste Post Closure-Care Permit as marked-up files comprising the Class 1 Permit modification:

- ◆ Permit Attachment 3, Appendix E (HWMU-16 Groundwater Compliance Monitoring Constituent List) from the Post-Closure Care Permit to add 1,1-DCE to the groundwater Compliance Monitoring Program for HWMU-16, and
- ◆ Permit Attachment 3, Appendix G (HWMU-16 Groundwater Protection Standards) from the Post-Closure Care Permit to add 1,1-DCE to the groundwater Compliance Monitoring Program for HWMU-16.

The requested changes represent a Class 1 permit modification under 40 CFR § 270.42, Appendix I.C.2 – *Changes in groundwater sampling or analysis procedures or monitoring schedule, with prior approval of the Director.*

Based on the above justification, this August 13, 2014, e-mailed letter requesting changes in the groundwater compliance monitoring program including the addition of 1,1-DCE and its associated background concentration and GPS; the RAAP has established sufficient documentation for approval of all requested changes. In accordance with the VHWMR, under 40 CFR § 270.42, Appendix I, Section C.2 and based upon the accuracy of the information contained in the Permittee's correspondence dated August 13, 2014, the requested Class 1 modifications to the permit are approved.

Enclosed are the final modified pages in electronic format to be inserted into the RAAP's copy of the hazardous waste permit.

All conditions and requirements of the facility Permit shall remain in effect for the duration of the Permit unless the existing Permit is modified, revoked and reissued, or terminated in accordance with 40 CFR § 124.5, and 40 CFR § 270.41 through 270.42, or continued in accordance with 9 VAC 20-60-270.B.5.

As provided by Rule 2A:2 of the Supreme Court of Virginia, you have 30 days from the date of service of this decision to initiate a legal appeal by filing a notice of appeal with:

David K. Paylor, Director
Department of Environmental Quality
629 East Main Street
P.O. Box 1105
Richmond, VA 23218

In the event that this decision is served to you by mail, the date of service will be calculated as three days after the postmark date. Please refer to Part 2A of the Rules of the Supreme Court of Virginia, which describes the required content of the Notice of Appeal, including specifications

of the Circuit Court to which the appeal is taken, and additional requirements concerning appeals from decisions of administrative agencies.

This above Class 1 permit modification under 40 CFR § 270.42(a)(1) requires the Permittee to send a notice of the modification to all persons on the facility mailing list (attached) within 90 days after the change is put into effect. In addition, RAAP must provide documentation to this Office regarding compliance with the public notice requirement. Please submit evidence of this mailing (return receipts, copy of the notification letter) when it is available.

If you should have any questions regarding these matters, please contact Russell McAvoy, Jr., PE, Environmental Engineer Senior, at (804) 698-4194 or by e-mail at russell.mcavoy@deq.virginia.gov.

Sincerely,



Leslie A. Romanchik
Hazardous Waste Program Manager
Office of Waste Permitting and Compliance

Enclosures: Facility Mailing List, Modified Permit Pages

cc: Andrea Barbieri – EPA, Region III (3LC50) e/enclosures
Jutta Schneider – DEQ, CO
Kurt Kochan – DEQ, CO
Aziz Farahmand – DEQ, BRRO
Elizabeth Lohman – DEQ, BRRO
Julia King–Collins – DEQ, CO
Central Hazardous Waste Files



COMMONWEALTH of VIRGINIA

DEPARTMENT OF ENVIRONMENTAL QUALITY

Street address: 629 East Main Street, Richmond, Virginia 23219

Mailing address: P.O. Box 1105, Richmond, Virginia 23218

www.deq.virginia.gov

Molly Joseph Ward
Secretary of Natural Resources

David K. Paylor
Director

(804) 698-4020
1-800-592-5482

July 19, 2016

Mr. Jay Stewart
Environmental Manager
BAE Systems, Ordnance Systems Inc.
4050 Pepper's Ferry Road
Radford, Virginia 24141

VIA ELECTRONIC MAIL

**Re: Annual Corrective Action Groundwater Monitoring Event Notification - HWMU-5
Semiannual Detection Notification – HWMU-16
Notification of Groundwater Verification Sampling Results for Post Closure Care Permit
HWMUs 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. Stewart:

This letter acknowledges the receipt and review of the Annual Corrective Action Groundwater Monitoring Event - HWMU-5, Semiannual Detection Notification – HWMU-16 dated June 14, 2016, and Notification of Groundwater Verification Sampling Results for Post Closure Care Permit HWMUs 5 & 16 dated June 5, 2015, submitted to the Virginia Department of Environmental Quality, Office of Remediation Programs (Department) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

It appears that no new targeted constituents were detected during the groundwater monitoring activities conducted during the Second Quarter of 2016 for HWMUs 5. However, total cobalt was detected in Point of Compliance (POC) monitoring wells 16WC1B and 16WC9 at concentrations of 35 micrograms per liter (ug/L) and 5.5 ug/L, respectively. These concentrations are greater than the Groundwater Protection Standard (GPS) of 5 ug/L for total cobalt for this unit. RAAP had previously submitted an Alternate Source Demonstration (ASD) to the Department indicating that the detections of cobalt in this well were due to natural variation. As the report points out, the Department requested a minimum of one year of additional monitoring of this well prior to making a decision on this ASD request. Further, tetrahydrofuran and cyanide were detected in POC monitoring well 16WC8 and tetrahydrofuran, vinyl chloride, and cyanide were detected in POC monitoring well 16WC1A.

EPA ID#: VA1210020730
Radford Army Ammunitions Plant
Radford, Virginia
July 19, 2016

Tetrahydrofuran was detected in the verification sample from 16WC1A at an estimated concentration of 2.2 ug/l, which is greater than the detection limit of 2.0 ug/l; therefore, the original estimated tetrahydrofuran concentration of 4.6 ug/l was confirmed. A Class 1 Permit Modification to add tetrahydrofuran to the Groundwater Compliance Monitoring List for the Unit is required. The Department concurs with RFAAP that the background value for tetrahydrofuran is the permit specified QL of 25 ug/l and that the Groundwater Protection Standard (GPS) be the May 2016 USEPA Regional Screening Level (RSL) of 3,400 ug/l since there is no USEPA Maximum Contaminant Level (MCL) or VDEQ Alternate Concentration Limit (ACL) for tetrahydrofuran.

On June 16, 2016, verification samples were collected from HWMU-16 POC monitoring well 16MW9 to confirm or refute the initial sampling results of cobalt at concentrations greater than the unit specific GPS of 5 ug/L. Total cobalt was detected at concentrations greater than the GPS during the verification sampling. The Department understands that for confirmation, a split sample and split sample duplicate were collected and sent to different laboratories to verify the initial detection. The sample and sample duplicate result concentrations from Test America, the primary laboratory, were 4.7 ug/l and 4.8 ug/l, respectively, which are less than the GPS of 5 ug/l. The split sample and split sample duplicate result concentrations from Eurofins were 5.6 ug/l and 6.0 ug/l, respectively, which are greater than the GPS of 5 ug/l. The Department respectfully disagrees with the Facility and considers this a confirmed detection.

RFAAP should continue to collect data as previously discussed for the Alternate Source Demonstration (ASD) for the cobalt detected above the applicable Groundwater Protection Standard in point of compliance well 16WC1B at HWMU-16 and now 16MW9.

As previously discussed, the Department acknowledges the presence of barium above the site-specific background concentration. The Department recognizes the variability of the lithology in the area of HWMU-16 that could potentially account for the natural variation of this trace element. No further investigation is required at this time; however, the Department may request further investigation if the barium levels in groundwater increase in the future.

EPA ID#: VA1210020730
Radford Army Ammunitions Plant
Radford, Virginia
July 19, 2016

If you have any additional technical questions, you may contact me at 703-583-3825 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,



Kurt W. Kochan
Corrective Action Project Manager
Office of Remediation Programs

cc: RFAAP Correspondence File
Brett Fisher, VDEQ-CO
Russ McAvoy, VDEQ-CO
Cassie McGoldrick, EPA Region 3
Jim McKenna, ACO Staff
Matt Albers, BAE
Aziz Farahmand, VDEQ-BRRO
Mike Lawless, DAA



COMMONWEALTH of VIRGINIA

DEPARTMENT OF ENVIRONMENTAL QUALITY

Street address: 1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

Mailing address: P.O. Box 1105, Richmond, Virginia 23218

www.deq.virginia.gov

Matthew J. Strickler
Secretary of Natural Resources

David K. Paylor
Director

(804) 698-4000
1-800-592-5482

May 3, 2021

Mr. Jim McKenna
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: 2020 Annual Groundwater Monitoring Report for
Hazardous Waste Management Units 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. McKenna:

This letter acknowledges the receipt and review of the 2020 Annual Groundwater Monitoring Report for Hazardous Waste Management Units (HWMU) 5 & 16 dated February 2021, submitted to the Virginia Department of Environmental Quality (Department or DEQ), Office of Remediation Programs (ORP) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

There were reportedly no new-targeted constituents detected during the groundwater monitoring activities conducted during the second or fourth quarters of 2020 for HWMU-5. However, total cobalt, a potentially newly detected constituent, continues to be detected at concentrations greater than the groundwater protection standard (GPS) and alternate concentration limit (ACL) in several monitoring wells at HWMU-16. The Department requested a revised Alternate Source Demonstration (ASD) for cobalt in December 2020. The revised ASD should be submitted as soon as practicable.

Further, the presence of vinyl chloride was verified in 16WC1A at HWMU-16. The Department concurs with the recommendations to utilize a background value of 1 ug/L based on permit specified QL as the constituent has not previously been detected at the unit and a GPS of 2 ug/L based on the USEPA MCL for vinyl chloride.

EPA ID#: VA1210020730

May 3, 2021

Page 2 of 2

As previously noted, the Department acknowledges the presence of barium above the site-specific background concentration. The Department recognizes that the variability of the lithology in the area of HWMU-16 could potentially explain the variation of this element. No further investigation is required at this time; however, the Department may request further investigation if the barium levels in groundwater increase in the future.

The Department accepts the report as complete. However, the Department does want to acknowledge that several constituents were reported above the permit specified detection limits. The Department does not require any action at this time as this issue is being addressed by a Class 1 permit modification that is currently under review by DEQ.

If you have any questions regarding this correspondence, you may contact me at 703-583-3825 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,



Kurt W. Kochan
Project Manager

cc: RFAAP Correspondence File
Tara Mason, Ashby Scott, DEQ-CO
Nikki Herschler, DEQ-BRRO
Melissa Lincoln, Jody Hawks, BAE
Mike Lawless, DAA



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

P.O. Box 1105, Richmond, Virginia 23218

(800) 592-5482

www.deq.virginia.gov

Travis A. Voyles
Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

May 8, 2024

Mr. Matt Alberts
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: Annual Groundwater Monitoring Report for
Hazardous Waste Management Units 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. Alberts:

This letter acknowledges the receipt and review of the 2023 Annual Groundwater Monitoring Report (Report) for Hazardous Waste Management Units (HWMU) 5 & 16 dated December 2023, submitted to the Virginia Department of Environmental Quality (Department or DEQ), Office of Remediation Programs (ORP) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

The Department has no comment and accepts the Report as complete. Further, the Department concurs with the proposal to establish a background concentration and groundwater protection standard (GPS) for the newly detected compound silver. RFAAP may utilize historical data from monitoring well 16C1 to establish a background concentration and use the DEQ alternate concentration limit for the GPS as proposed.

EPA ID#: VA1210020730

May 8, 2024

Page 2 of 2

If you have any questions regarding this correspondence, you may contact me at 703-232-4200 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Kurt W. Kochan", written in a cursive style.

Kurt W. Kochan
Office of Remediation Programs

cc: RFAAP Correspondence File
Tara Mason, Ashby Scott, DEQ-CO
Laura Dickerson, RFAAP
Melissa Lincoln, BAE
Mike Lawless, TRC

Indicator Parameter Data for Monitoring Wells -2024

Radford Army Ammunition Plant (RFAAP) - Hazardous Waste Management Unit #16

Radford, Virginia

<i>Indicator Parameter</i>	<i>Unit</i>	<i>16C1</i>	<i>16MW8</i>	<i>16MW9</i>	<i>16WC1A</i>	<i>16WC1B</i>	<i>16WC2B</i>	<i>16-2</i>	<i>16-3</i>	<i>16-5</i>
<i>Second Quarter 2024</i>										
Dissolved Oxygen (DO)	mg/L	0.7	0.4	0.8	0.7	3.9	0.6	5.5	4.7	1.8
Oxidation Reduction Potential (ORP)	mV	56.3	243.2	-29.1	-61.2	213.3	76.9	160.4	177.5	210.3
pH	s.u.	6.44	5.02	6.49	6.69	6.03	7.91	7.05	7.43	6.68
Specific Conductivity	uS/cm	661	126.4	887	679	365.4	290.5	594.3	224.6	498.4
Temperature	deg's C	14.1	15.1	15.3	14.8	13.2	15	13.9	15.2	13.3
Turbidity	NTU	0.59	1.37	0.57	0.47	2.43	0.45	0.55	0.95	1.35
<i>Third Quarter 2024</i>										
Dissolved Oxygen (DO)	mg/L	0.33	0.01	1.05	0.01	1.3	0.13	5.51	3.11	1.82
Oxidation Reduction Potential (ORP)	mV	92	236.9	3.4	-49.4	204.3	35.9	172.4	140.7	168.8
pH	s.u.	6.4	5.08	6.65	6.78	6.26	7.72	6.94	7.91	7.26
Specific Conductivity	uS/cm	630	124	806	652	367	289	557	215	484
Temperature	deg's C	16.24	18.85	17.01	15.23	14.02	15.32	15.51	17.66	15.51
Turbidity	NTU	0.78	3.07	2.05	0.68	13.6	0.4	0.44	1.14	0.54

APPENDIX C
LABORATORY ANALYTICAL RESULTS – YEAR 2024

Submitted as separate pdf due to file size

APPENDIX D

FIELD NOTES

General Notes:

- Weather - Overcast + 60°-70°s
- PPE - Nitrile gloves, eye protection + safety boots
- Calibrations - YSI Pro Plus

pH: 4.00 = 4.00, 7.00 = 7.00, 10.00 = 10.00

Conductivity reads 1413 $\mu\text{S}/\text{cm}$ in a 1413 $\mu\text{S}/\text{cm}$ std.

HACH 2100Q Turbidimeter: 0.02-1000 NTU

- Dedicated well skirts + tubing used at each well.
- All equipment decontaminated before + after event and between use at each sample location.
- All purge water collected + disposed of at dedicated on-site location.

- All samples collected, transported + shipped on ice and in coolers.

- Sample collection order: 8260D, 8270E, TM

- All wells purged + sampled at 0.25L/min.

- All DTW's collected in feet. below Top of Casing

- Sample collection order: 8260D, 8270E + T.M.

- Volts collected from one pulse from bladder pump / Bladder pump setting: 4 cycles / MAY 10 sec - 2

- Sample Analysis

8260D

HCL

TM

HNO₃

8270E

-

STATIC WATER LEVEL TABLE (Measured in feet)

WELL	DTW	P/P-DTW	NOTES	WELL	DTW	P/P-DTW	NOTES
SW8B	14.23	14.83	Pad okay	SWCA	11.32	-	Pad okay
SW12A	11.31	11.31	Pad okay	SW10A	13.15	-	
SW7B	9.37	9.39	Pad okay	SWC11	15.05	-	
SW5B	9.26	9.43	Pad okay	SSW5	8.52	-	
SWC21	9.45	9.55	Pad okay	SSW6	7.14	-	
SWC22	9.42	9.45	Pad okay	SSW7	11.17	-	
SWC23	8.82	8.87	Pad okay	SSW8	11.74	-	
<u>SW L's ONLY</u>				SW11A	11.36	-	
SW9A	1.15	-	Pad okay	SWC12	15.47	-	

5/08/24 - RFAAP UNIT-5/547076/KFC-ABP F.B.#15

Confidence Solution Confidence Range

BATCH # - 22G1C

DATE OPENED - 4/01/24

	TEMP (°C)	COND ^{MS} _{CM}	ORP (mV)	pH
	Actual/Range	Actual/Range	Actual/Range	Actual/Range
PRE-	16.6/16-20	7717/7630-7970	232/222-252	7.06/6.8-7.2
POST-	22.8/21-25	7641/7630-8010	240/212-242	7.03/6.8-7.2

SW8R: DTW=14.23 CB: 18 [Begin Purge (0816)]

P/PURGE DTW=14.83

Initial Purge - Clear

TIME	TEMP (°C)	COND ^{MS} _{CM}	DO ^{MS} _{CM}	pH	TURB (NTU)	ORP (mV)	DTW	Desc.
(0817)	14.34	77	6.75	4.99	2.04	327.2	14.96	Clear
(0822)	14.21	66	6.03	4.95	1.35	344.6	14.91	Clear
(0827)	14.19	66	5.50	4.91	1.03	349.3	14.85	Clear
(0832)	14.32	65	5.56	4.90	0.81	350.4	14.82	Clear
(0837)	14.31	65	4.44	4.87	0.73	354.3	14.80	Clear
(0842)	14.41	65	4.18	4.87	0.82	355.9	14.80	Clear
(0847)	14.35	64	3.64	4.90	0.73	361.2	14.83	Clear
(0852)	14.40	65	3.59	4.88	0.93	359.8	14.82	Clear
(0857)	14.41	64	3.57	4.88	0.73	359.9	14.83	Clear
(0857) Readings Stable								

Sample Time (0900)

Samples Collected: (3) 8260D, (1) TM.

(0903)	14.64	65	3.47	4.84	0.87	353.7	14.83	Clear
--------	-------	----	------	------	------	-------	-------	-------

F.B.#15

5/08/24. RFAAD. UNIT-5 / 547076 / KFC-ABP F.B.#15

5W12A : DTW: 11.31 CB: 20 Begin Purge (0918)

P/Purge DTW: 11.31

Initial Purge - CLEAR

Time	Temp	Conduct	DO ^{mg/l}	pH	Turbidity	ORP(mV)	DTW	Desc.
(0919)	15.09	467	2.77	6.61	1.08	220.7	11.32	clear
(0924)	14.79	464	1.46	6.73	0.77	202.4	11.31	clear
(0929)	14.76	463	1.19	6.72	0.52	197.3	11.31	clear
(0934)	14.88	462	1.08	6.73	0.71	192.2	11.31	clear
(0939)	14.91	461	1.05	6.74	0.66	188.0	11.31	clear
(0944)	15.00	459	1.09	6.77	0.50	183.1	11.31	clear

(0944) Readings stable

Sample Time (0945)

Samples Collected: (3) 8260D, (1) TM,

(0948) 15.14 459 1.20 6.84 0.70 180.5 11.31 clear

(XMS/MSD)

5W7B : DTW: 9.37 CB: 14 Begin Purge (0957)

P/Purge DTW: 9.39

Initial Purge - Clear

Time	Temp	Conduct	DO ^{mg/l}	pH	Turb ^(NTU)	ORP(mV)	DTW	Desc.
(0958)	12.91	139	2.63	5.63	0.55	278.7	9.39	clear
(1003)	13.32	138	2.22	5.59	0.49	297.4	9.36	clear
(1008)	13.47	136	2.22	5.39	0.47	297.3	9.36	clear
(1013)	13.81	137	2.14	5.40	0.42	292.6	9.34	clear
(1018)	14.51	136	2.19	5.40	0.53	292.7	9.34	clear
(1023)	14.26	134	2.23	5.44	0.47	292.4	9.34	clear

(1023) Readings stable

Sample Time (1025)

Samples Collected: (9) 8260D, (3) TM, (6) 8270E, (6) 8270E (GEL)

(1047) 13.69 141 2.46 5.50 0.51 299.4 9.39 clear

(141)

5/08/24. RFAAP. UNIT 5 / 547076 / KFC-ABP

F.B.#15

5WSB : DTW: 9.26 CB: 12 Begin Purge (1056)

P/Purge DTW: 9.43

Initial Purge - Clear

Time	Temp	Cond. $\mu S/cm$	DO mg/L	pH	Turb (NTU)	ORP mV	DTW	Desc
(1057)	13.52	303	2.99	5.41	0.61	303.7	9.63	Clear
(1102)	13.26	306	1.28	5.29	0.64	300.6	9.56	Clear
(1107)	13.41	307	1.04	5.27	0.54	296.4	9.48	Clear
(1112)	13.55	307	0.92	5.26	0.40	293.4	9.46	Clear
(1117)	13.88	307	0.95	5.25	0.76	290.1	9.45	Clear
(1122)	13.92	307	0.95	5.26	0.54	290.0	9.42	Clear

(1122) Readings Stable

Sample Time (1125)

Samples Collected: (3) 8260D, (1) TM, (2) 8270E, (2) 8270E (GEL)

(1134)	13.92	317	1.37	5.30	0.51	286.0	9.43	Clear
--------	-------	-----	------	------	------	-------	------	-------

5WC22 : DTW: 9.42 CB: 20 Begin Purge (1154)

P/Purge DTW: 9.45

Initial Purge - Clear

Time	Temp	COND $\mu S/cm$	DO mg/L	pH	ORP mV	Turb (NTU)	DTW	Desc.
(1155)	14.62	806	1.24	6.57	232.9	2.40	9.42	Clear
(1200)	14.53	763	0.29	6.73	213.3	2.26	9.43	Clear
(1205)	14.40	759	0.05	6.75	197.8	9.33	9.45	Clear
(1210)	14.53	758	0.01	6.75	194.7	9.73	9.44	Clear
(1215)	14.55	758	0.03	6.75	189.8	9.65	9.44	Clear
(1220)	14.57	758	0.04	6.76	185.6	8.61	9.44	Clear

(1220) Readings Stable

Sample Time (1225)

Samples Collected: (3) 8260D, (1) TM, (2) 8270E, (2) 8270E (GEL)

(1232)	15.26	757	0.02	6.73	168.4	6.74	9.45	Clear
--------	-------	-----	------	------	-------	------	------	-------

(142)

SWC 23 : DTW: 8.82 | CB: 29 | Begin Purge (1135)

P/Purge DTW: 8.87

Initial Purge - Clear

Time	Temp	Cond. μ m	DO mg/l	pH	ORP mV	Turb NTU	DTW	Desc.
(1236)	13.42	812	2.79	7.05	187.1	2.13	8.88	clear
(1241)	13.52	832	0.95	6.86	192.6	1.65	8.87	clear
(1246)	13.53	834	0.73	6.82	193.4	1.00	8.87	clear
(1251)	13.64	835	0.71	6.77	194.7	0.88	8.86	clear
(1256)	13.77	836	0.71	6.76	194.9	0.64	8.86	clear
(1301)	13.77	837	0.70	6.77	194.8	0.80	8.86	clear

(1301) Readings Stable

Sample Time (1305)

Samples collected: (3) 8260D, (1) TM, (2) 8270E, (2) 8270E (GEL)

(1308)	14.15	843	0.78	6.80	172.9	0.71	8.87	clear
--------	-------	-----	------	------	-------	------	------	-------

SWC 21 : DTW: 9.45 | CB: 25 | Begin Purge (1313)

P/Purge DTW: 9.55

Initial Purge - Clear

Time	Temp	Cond. μ m	DO mg/l	pH	ORP mV	Turb NTU	DTW	Desc.
(1314)	14.12	484	1.37	5.77	238.5	15.5	9.49	clear
(1319)	14.81	472	1.42	5.64	253.9	10.1	9.47	clear
(1324)	15.50	457	1.46	5.54	263.1	8.03	9.45	clear
(1329)	16.09	456	1.56	5.55	260.3	6.92	9.46	clear
(1334)	16.08	457	1.52	5.56	253.4	6.42	9.47	clear
(1339)	15.99	458	1.58	5.57	253.6	5.76	9.47	clear

(1339) Readings Stable

Sample Time (1340)

Samples collected: (3) 8260D, (1) TM, (2) 8270E, (2) 8270E (GEL)

(1353)	15.71	447	1.24	5.52	249.7	2.96	9.55	clear
--------	-------	-----	------	------	-------	------	------	-------

SWDUP Sample Time (1340) / Sample Time OC (1355)

Samples collected: (3) 8260D, (1) TM, (2) 8270E, (2) 8270E (GEL)

Collected from SWC 21.

General Notes-

- Weather: Overcast, light rain & 60°s
- PPE - Nitrile gloves, eye protection & safety boots
- Calibrations - HANNA MULTIMETER

pH: 4.00 - 4.00 7.00 = 7.00 10.00 = 10.00

Conductivity reads 1413 $\mu S/cm$ in a 1413 $\mu S/cm$ std.

D.O. % = 100.0 %

HACH 2100Q Turbidity meter: 0.02 - 1000 NTU

- Dedicated well skirts & tubing used at each well.
- All equipment decontaminated before & after event and between use at each sample location.
- All purge water collected & disposed of at dedicated on-site location.
- All samples collected, transported & shipped on ice in coolers.
- Sample collection order: 8260D (preserved w/ HCL)
- All wells purged & sampled at 0.25 L/MIN.
- All DTW's collected in feet, below Top of Casing
- VOC's collected from one pulse from bladder pump.

Bladder pump setting: 4 cycles: 5 sec discharge / 10 sec recharge

CONFIDENCE SOLUTION VALUE RANGE

BATCH# - 22G1C		DATE OPENED: 5/17/24	
TEMP (°C)		CONDUCTIVITY $\mu S/cm$	
Actual/Range		ORP (mV)	
Actual/Range		pH	
Pre- 14.6 / 11-15	7823 / 7600-7970	258 / 229-261	7.03 / 6.8-7.2
Post- 16.1 / 16-28	7718 / 7630-7970	249 / 222-252	6.96 / 6.8-7.2

#15

6/05/24 - REAAA UNIT-5 / 547076 / REC-APP F.B.#15

SWC23: DTW=9.11

P/PURGE DTW=9.14

Begin Purge (0824)

Initial Purge - CLEAN

TIME	TEMP(°C)	COND ^{MS} _{CM}	DO ^{MS} _{CM}	pH	ORP (mV)	TURB (NTU)	DTW	Desc.
(0826)	14.29	904	4.05	6.85	143.1	4.51	9.15	clear
(0831)	13.41	862	1.10	6.50	157.3	1.18	9.15	clear
(0836)	13.55	861	0.44	6.61	145.9	1.13	9.15	clear
(0841)	13.54	863	0.30	6.68	140.3	0.77	9.14	clear
(0846)	13.57	865	0.29	6.75	135.1	0.60	9.14	clear
(0851)	13.59	867	0.22	6.78	132.4	0.59	9.14	clear
(0851)	Readings stable							

Sample Time (0855)

Samples Collected: (3) 82601

(0900) 13.77 870 0.15 6.81 129.3 0.84 9.14 clear

DUP

Sample Time (0855) / Sample Time COC (0900)

Samples Collected (3) 82601

* Collected from SWC23

157

General Notes: UNIT-16

- Weather: Overcast, 58°-70°s
- PPE: Nitrile gloves eye protection & safety boots
- Calibrations - YSI Pro Plus Multimeter

pH: 4.00 = 4.00 7.00 = 7.00 10.00 = 10.00

Conductivity reads 1413 $\mu S/cm$ in a 1413 $\mu S/cm$ standard

HACH 2100Q Turbidity meter: 0.02-1000 NTU

DO% = 100.0 %

- Dedicated well skirts used at all wells.
- All equipment deconned before & after event and between use at each sample location.
- All purge water collected & disposed of at a dedicated on-site location.
- All samples collected, transported & stored on ice in coolers. 8260D, 8270D/E, TM ^{UND 8-1-24}
- Sample collection order: ~~See specific sample ID.~~
- All wells purged & sampled at 0.25 L/MIN ^{UND 8-1-24}
- All DTW's measured in feet. below Top of Casing.

SAMPLE ANALYSIS	Preservative	SAMPLE ANALYSIS	Preservative
8260D	HCL	8270D/E	—

TOTAL METALS HNO₃

- Bladder pump setting: 4 cycles/min 5 SEC DISCHARGE 10 SEC RECHARGE
- VOA's collected from one pulse from bladder pump.

CONFIDENCE SOLUTION VALUE RANGE

BATCH #: 22G1C

DATE OPENED: 4/01/24

	TEMP(°C)	COND $\mu S/cm$	ORP(mV)	pH
	Actual/Range	Actual/Range	Actual/Range	Actual/Range
PREF.	14.8/11-15	7708/7600-7770	231/224-261	6.91/6.8-7.2
POST	16.5/16-20	7710/7630-7970	250/222-252	7.08/6.8-7.2

5/07/24 - RFAAD UNIT-16 / 547076 / KFC-ABP

F.B.#15

STATIC WATER LEVEL TABLE (measured in feet)

WELL	DTW	P/P-DTW	NOTES	WELL	DTW	P/P-DTW	NOTES
16-2	-55.82	55.89	PAD OKAY	16MW9	64.73	65.78	Pad okay
16-3	-56.72	61.03	Pad okay	16C1	48.23	48.29	Pad okay
16-5	-4.91	8.53	PAD OKAY	SWL'S ONLY			
16WC2B	-53.51	61.38	Pad okay	16C3	65.98		pad okay
16WC1B	-68.33	68.33	Pad okay; Bailed.	16CDH3	Dry @ 68.50		Pad okay
16WC1A	-67.51	68.43	Pad okay	16WC2A	Dry @ 61.91		Pad okay
16MW8	-73.27	74.62	Pad okay	16-1	-50.15		Pad okay

16-5: DTW: 4.91

CB:30

Begin Purge (0857)

P/PURGE DTW: 8.53

Initial Purge - clear

TIME	TEMP(°C)	COND ^{us} _{cm}	DOWS	pH	TURB _(NTU)	ORP _(mV)	DTW	Desc.
0858	13.2	481.0	4.5	6.51	12.6	207.7	5.57	clear
0903	12.7	495.2	3.9	6.41	4.56	211.1	6.56	clear
0908	12.8	495.4	2.7	6.67	3.58	211.3	7.03	clear
0913	13.0	497.1	2.2	6.52	3.18	210.1	7.34	clear
0918	13.4	495.5	1.8	6.62	2.46	208.4	7.36	clear
0923	13.3	498.4	1.8	6.68	1.35	210.3	7.42	clear
0923	Readings stable							

Sample time (0925)

Samples Collected: (3) 8260D, (3) 8260C, (1) TM, (2) 8270E

Post Purge Readings:

(0933) 13.2 509.3 2.4 6.70 1.05 209.1 8.53 clear

16 SPRING

TIME	TEMP(°C)	COND ^{us} _{cm}	DOWS	pH	ORP _(mV)	TURB _(NTU)	Desc.
(0938)	12.9	542.8	6.3	7.35	201.5	1.28	clear

Sample Time (0940)

Samples collected: (6) 8260A, (1) TM, (2) 8270E

B#15

5/07/24 - RFAAF UNIT-16/547076/KFC-ABP

F.B.#15

f)

MTC

d okay

okay

okay

okay

okay

okay

)

S.C.

ear

ear

ear

ear

ear

ear

er

c.

Well purged and sampled with new disposable bailer.

16WC1B-

Purged for 3 bore volumes. 8/11/24

TD: 75.15

Begin Purge (0811)

DTW: 68.33

Initial Purge - slightly cloudy

$$6.82 \times 0.163 = 1.11$$

$$x3 = 3.33 \text{ gallons}$$

TIME	TEMP (°C)	COND (µm)	DO (mg/L)	pH	Turb (NTU)	ORP (mV)	BAIL VOL (#)	Desc.
------	-----------	-----------	-----------	----	------------	----------	--------------	-------

(0812)	13.8	369.1	4.2	6.12	31.1	202.8	1	0.25 Slightly cloudy
--------	------	-------	-----	------	------	-------	---	----------------------

(0816)	13.1	360.3	4.0	6.05	15.6	208.3	5	1.25 Clear w/ black particles
--------	------	-------	-----	------	------	-------	---	-------------------------------

(0819)	13.2	369.7	4.0	6.03	4.73	212.9	9	2.25 clear
--------	------	-------	-----	------	------	-------	---	------------

(0822)	13.2	365.4	3.9	6.03	2.43	213.3	14	3.50 clear
--------	------	-------	-----	------	------	-------	----	------------

(0822)	Well Purged @ ~3.50 gallons							
--------	-----------------------------	--	--	--	--	--	--	--

Sample Time (0830)

Samples Collected: (6) 8260D/E, (2) 8270E, (1) TM

Post Purge DTW: 68.33 ft

16WC2B:

TD: 104.77

P/Purge DTW: 61.38

Begin Purge (1000)

DTW: 53.51

CB: 60

Initial Purge - clear

Time	Temp (°C)	Cond (µm)	DO (mg/L)	pH	Turb (NTU)	ORP (mV)	DTW	Desc.
(1001)	14.8	292.4	7.8	7.62	1.76	175.6	54.18	clear
(1006)	14.6	288.0	2.0	8.21	0.74	167.2	55.46	clear
(10017)	14.6	288.9	0.9	7.91	0.49	138.1	56.32	clear
(1016)	14.7	289.3	0.7	7.97	0.66	105.4	57.58	clear
(1021)	14.7	289.4	0.6	7.97	0.49	86.5	58.45	clear
(1026)	14.8	290.3	0.6	7.96	0.46	80.9	59.16	clear
(1031)	15.0	290.5	0.6	7.91	0.45	76.9	59.81	clear

(1031) Readings stable

Sample Time (1035)

Samples Collected: (3) 8260D, (3) 8260C, (2) 8270E, (1) TM

Post Purge Readings:

(1039)	14.7	292.0	0.8	7.94	0.77	69.3	61.38	clear
--------	------	-------	-----	------	------	------	-------	-------

5/07/24

RAAP-Unit 16 / 547076 / (ABP/KFC)

FB#15

16-2:

TD: 77.13

CB: 57

Begin Purge (1047)

DTW: 55.82

P/Purge DTW: 55.89

Initial Purge - clear

Time	Temp	Cond. μ m	DO $\frac{mg}{L}$	pH	Turb (NTU)	ORP (mv)	DTW	Desc.
(1048)	13.7	546.1	6.7	7.00	1.29	129.1	55.82	clear
(1053)	14.0	599.7	5.3	6.99	0.90	140.7	55.85	clear
(1058)	13.7	603.0	5.3	6.99	0.85	146.5	55.86	clear
(1103)	13.7	601.4	5.4	7.03	0.48	153.6	55.87	clear
(1108)	13.9	598.1	5.5	7.03	0.60	159.3	55.88	clear
(1113)	13.9	594.3	5.5	7.05	0.55	160.4	55.88	clear

(1113) Readings stable

Sample Time (1115)

Samples Collected: (3) 8260D, (3) 8260C, (2) 8270E, (1) TM

Post Purge Readings:

(1120) 14.3 589.3 5.7 7.06 0.99 170.9 55.89 clear

16mw8:

TD: 77.63

CB: 57

Begin Purge (1131)

DTW: 73.27

P/Purge DTW: 74.62

Initial Purge - clear

Time	Temp	Cond. μ m	DO $\frac{mg}{L}$	pH	Turb	ORP (mv)	DTW	Desc.
(1132)	17.3	147.3	1.3	5.87	2.56	233.3	73.45	clear
(1137.5)	16.3	142.3	0.7	5.31	0.92	242.7	73.62	clear
(1138)	16.1	142.3	0.7	5.08	0.65	246.5	73.70	clear
(1141)	15.6	138.2	0.5	5.06	1.66	248.8	74.03	clear
(1144)	15.1	131.2	0.4	5.00	1.51	245.6	74.25	clear
(1147)	15.1	126.4	0.4	5.02	1.37	243.2	74.37	

(1147) Readings stable

Sample Time (1150)

Samples Collected: (3) 8260D, (3) 8260C, (2) 8270E, (1) TM

(1156) 15.4 129.7 0.5 5.06 1.64 233.7 74.62 clear

* 3 minute Readings to reduce drawdown impact.

16-3:

DTW: 56.72 CB: 50 Begin Purge (1204)
TD: 79.42 P/Purge DTW: 61.03 Initial Purge - clear

Time	Temp	Cond	DO	pH	Turb	ORP	DTW	Desc.
(1205)	14.6	224.6	7.1	6.37	1.06	226.3	57.35	clear
(1210)	15.0	222.2	5.4	6.85	0.89	209.8	57.79	clear
(1215)	14.9	225.9	4.9	7.27	0.95	187.5	58.82	clear
(1220)	15.5	224.4	4.7	7.36	0.95	182.1	58.43	clear
(1225)	15.8	226.4	5.3	7.38	1.30	178.9	59.90	clear
(1230)	15.2	224.6	4.7	7.43	0.95	177.5	60.82	clear

(1230) Readings stable

Sample Time (1235)

Samples Collected: (3) 8260D, (3) 8260C, (2) 8270E, (1) TM
(1237) 15.0 225.1 4.8 7.50 0.92 178.3 61.03 clear

16W01A:

DTW: 67.51 P/Purge DTW: 68.43
CB: 60 TD: 75.15 (96.20) Begin Purge (1246), Initial Purge - clear

Time	Temp	Cond	DO	pH	Turb	ORP	DTW	Desc.
(1247)	14.5	526.9	7.9	7.61	1.88	203.4	68.22	clear
(1252)	14.6	687.0	1.3	7.10	1.03	45.1	68.51	clear
(1257)	14.6	679.0	1.0	6.91	0.71	48.6	68.60	clear
(1302)	14.9	678	0.8	6.91	0.52	-11.7	68.47	clear
(1307)	14.8	679	0.8	6.80	0.42	-43.7	68.41	clear
(1312)	15.0	679	0.8	6.66	0.48	-58.6	68.38	clear
(1317)	14.8	680	0.8	6.67	0.41	-59.5	68.40	clear
(1322)	14.8	679	0.7	6.69	0.47	-61.2	68.41	clear

(1322) Readings stable

Sample Time (1325)

Samples Collected: (9) 8260D, (9) 8260C, (6) 8270E, (3) TM
(1342) 14.9 693 0.6 6.72 1.04 -70.6 68.43 clear

16W02D

Sample Time (1340)

*collected from 16W01A

Samples Collected: (5) 8260D, (3) 8260C, (2) 8270E, (1) TM

(137)

16MW9:

CB: 50

TD: 76.13

Begin Purge (1349)

DTW = 64.73

P/Purge DTW 65.78

Initial Purge - clear

TIME	TEMP (°C)	COND. μ m	DO μ m	pH	Turb	ORP μ mV	DTW	DESC.
(1350)	14.8	859	4.9	6.76	2.64	-24.6	65.73	clear
(1355)	15.0	882	2.0	6.52	0.73	-30.4	65.78	clear
(1400)	14.9	886	1.2	6.59	1.82	-30.1	65.78	clear
(1405)	15.3	887	1.0	6.50	0.85	-29.4	65.78	clear
(1410)	15.5	887	0.9	6.52	0.61	-28.6	65.78	clear
(1415)	15.3	887	0.8	6.49	0.57	-29.1	65.78	clear
(1415)	Readings Stable							

Sample Time (1420)

Samples Collected: (6) 8260D, (3) 8260C, (2) 8270E, (1) TM

(1425) 15.5 884 0.5 6.50 0.62 -31.7 65.78 clear

16CL:

TD: 71.49

CB: 48

Begin Purge (0233)

DTW: 48.23

P/Purge DTW: 48.29

Initial Purge - clear

Time	Temp	Cond. μ m	DO μ m	pH	Turb	ORP μ mV	DTW	Desc
(1434)	14.9	512.1	5.4	7.38	1.37	-3.9	48.24	clear
(1439)	14.6	733	1.8	6.86	0.73	26.9	48.25	clear
(1444)	14.3	679	1.3	6.45	0.59	39.0	48.26	clear
(1449)	14.4	662	1.0	6.42	0.83	48.7	48.26	clear
(1454)	14.6	659	0.9	6.49	1.70	54.1	48.26	clear
(1459)	14.1	661	0.7	6.44	0.59	56.3	48.29	clear
(1459)	Readings Stable							

Sample Time (1500)

Samples Collected: (3) 8260D, (3) 8260C, (2) 8270E, (1) TM

(1505) 14.8 658 0.8 6.41 60.1 48.29 clear

General Notes:

- Weather- Overcast, misty & 70's
- PPE- Nitrile gloves eye protection & safety boots
- Calibrations- HANNA Multimeter

pH: 4.00 = 4.00, 7.00 = 7.00, 10.00 = 10.00

Conductivity reads 1413 $\frac{\mu S}{cm}$ in a 1413 $\frac{\mu S}{cm}$ standard

D.O.% = 100 %

HACH 2100Q Turbidimeter: 0.02-1000 NTU

- Dedicated well skirts used at each well location
- All equipment deconned before & after event and between use at each sample location.
- All purge water collected & disposed of at dedicated on-site location.
- All samples collected, transported & shipped on ice and in coolers.
- Sample collection order: 8260D + T.M.
- All wells purged and sampled at 0.25L/min.
- All DTW's collected in feet.
- VOA's collected from one pulse from bladder pump:

Bladder pump setting: 4 CYCLES/MIN (5 sec discharge / 10 sec recharge)

- SAMPLE ANALYSIS Preserv. | Sample Analysis Preserv.

8260D

HCL

TM

HNO₃

STATIC WATER LEVEL TABLE (Measured in feet)

WELL	DTW	P/PNTW	NOTES	WELL	DTW	P/PNTW	NOTES
SW08	14.05	14.39	Pad okay	SW0A	13.03		Pad okay
SW2A	11.58	11.58	Pad okay	SW10A	13.80		Pad okay
SW7B	9.32	9.32	Pad okay, no sign	SWC11	14.62		Pad okay
SW5B	9.19	9.39	Pad okay	SSW5	8.41		Pad okay
SWC21	9.31	9.47	Pad okay	SSW6	7.03		Pad okay
SWC22	9.31	9.34	Pad okay	SSW7	11.09		Pad okay
SWC23	8.62	8.75	Pad okay	SSW8	11.52		Pad okay
SWL's ONLY				SW11A	11.64		Pad okay
SW9A	1.72		Pad okay	SWC12	15.11		Pad okay

7/23/24 - RFAAD (UNIT-5) / 547076 / KFC-ASP F.B.#6

CONFIDENCE SOLUTION VALUE RANGE

BATCH #: 2261C

DATE OPENED: 7/01/24

TEMP (°C)

COND^{MS}_{CM}

ORP (mV)

pH

ACTUAL / RANGE

ACTUAL / RANGE

ACTUAL / RANGE

ACTUAL / RANGE

PRE- 15.3 / 11-15 7881 / 7600-7990 251 / 229-261 6.94 / 6.8-7.2

POST- 18.0 / 16-20 7977 / 7830-7970 240 / 222-252 6.99 / 6.8-7.2

SWRB: DTW = 14.05 [CB: 16] Begin Purge (0822)

P/PURGE DTW = 14.39

Initial Purge - clear

TIME TEMP (°C) COND^{MS}_{CM} DO^{MS}_{CM} pH ORP (mV) TWRB (NTU) DTW Desc.

(0823) 16.36 58 5.72 4.41 297.1 1.40 14.08 clear

(0828) 16.14 57 4.90 3.86 349.7 0.77 14.22 clear

(0833) 16.68 58 3.88 3.85 356.6 1.44 14.23 clear

(0838) 15.08 58 3.46 3.88 368.1 0.77 14.41 clear

(0843) 15.23 58 3.29 3.98 365.6 1.02 14.47 clear

(0848) 15.19 57 3.18 4.19 357.3 1.02 14.49 clear

(0853) 15.44 57 3.04 4.48 346.6 0.75 14.31 clear

(0858) 15.89 57 2.97 4.53 339.8 0.98 14.33 clear

(0903) 16.06 57 2.93 4.59 336.9 0.68 14.32 clear

(0903) Readings stable

Sample Time (0905)

Samples Collected: (3) 8260D, (1) TM

(0909) 16.10 57 2.94 4.68 320.4 0.94 14.39 clear

F.B.#16

7/23/24 - RFAAP (UNIT-5) / 547076 / RFC-ASP

F.B.#16

5W12A DTW: 11.58

CB: 17

Begin Purge (0919)

P/Purge DTW: 11.58

Initial Purge - Clear

Time	Temp	Cond. μ m	DO mg/L	pH	Turb (ntu)	ORP (mV)	DTW	Desc.
(0920)	15.98	503	2.24	6.62	0.52	214.9	11.58	clear
(0925)	16.45	513	0.89	6.68	0.84	182.9	11.58	clear
(0930)	16.26	516	0.63	6.69	0.59	169.2	11.58	clear
(0935)	16.50	517	0.51	6.69	0.69	161.1	11.58	clear
(0940)	16.28	517	0.46	6.70	0.95	154.5	11.58	clear
(0945)	16.01	518	0.39	6.70	0.95	153.7	11.58	clear
(0945)	Readings stable							

Sample Time (0950)

Samples Collected: (3) 8260D, (1) TM

(0953) 16.31 512 0.60 6.71 0.62 151.8 11.58 clear

(ms/msd)

5W7B DTW: 9.32

CB: 12

Begin Purge (0959)

P/Purge DTW: 9.32

Initial Purge - Clear

Time	Temp	Cond. μ m	DO mg/L	pH	Turb (ntu)	ORP (mV)	DTW	Desc.
(1000)	17.52	140	2.64	5.81	0.79	203.7	9.32	clear
(1005)	18.92	139	1.53	5.39	0.46	227.1	9.32	clear
(1010)	19.07	141	1.42	5.31	0.74	233.0	9.32	clear
(1015)	19.57	140	1.35	5.29	0.65	231.2	9.32	clear
(1020)	17.71	136	1.10	5.27	0.55	232.4	9.32	clear
(1030)	17.34	137	1.03	5.22	0.64	233.1	9.32	clear
(1035)	17.33	138	1.00	5.19	0.53	230.0	9.32	clear
(1035)	Readings stable							

Sample Time (1040)

Samples Collected: (9) 8260D, (3) TM

(1044) 17.27 139 1.27 5.20 0.85 229.7 9.32 clear

7/23/24. RFAAP(UNIT-5)/547076/KFC-ARPA

F.B.#16

SWSB

DTW: 9.19

CB: 12

Begin Purge (1048)

P/Purge DTW: 9.39

Initial Purge - Clear

Time	Temp	Cond. μ m	DO $_{mg}$	pH	Turb $^{(w/v)}$	ORP $^{(mv)}$	DTW	Desc.
(1049)	17.18	334	3.45	5.34	1.58	234.6	9.39	Clear
(1054)	15.51	330	1.41	5.16	1.10	245.4	9.50	clear
(1059)	15.87	332	1.34	5.13	0.97	247.9	9.50	clear
(1104)	16.86	332	1.38	5.11	0.86	247.8	9.46	clear
(1109)	16.64	332	1.43	5.15	0.69	247.6	9.35	clear
(1114)	16.59	333	1.52	5.15	0.80	246.0	9.35	clear
(1114) Readings stable								

Sample Time (1115)

Samples Collected: (3) 8260D, (1) TM

(1116)	16.87	335	1.87	5.20		247.1	9.39	clear
--------	-------	-----	------	------	--	-------	------	-------

SWC22

DTW: 9.31

CB: 14

Begin Purge (1127)

P/Purge DTW: 9.34

Initial Purge - Clear

Time	Temp	Cond. μ m	DO $_{mg}$	pH	Turb $^{(w/v)}$	ORP $^{(mv)}$	DTW	Desc.
(1128)	16.83	800	1.29	6.68	1.91	171.2	9.32	clear
(1133)	15.98	792	0.48	6.69	2.37	155.8	9.32	clear
(1138)	15.86	790	0.24	6.69	4.91	145.5	9.34	clear
(1143)	16.64	790	0.09	6.67	4.89	136.4	9.34	Clear
(1148)	16.35	787	≤ 0.01	6.67	4.82	129.9	9.34	Clear
(1153)	16.46	780	≤ 0.01	6.68	4.11	126.8	9.34	clear
(1153) Readings stable								

Sample Time (1155)

Samples Collected: (3) 8260D, (1) TM

(1200)	16.60	791	≤ 0.01	6.72	4.21	124.8	9.34	clear
--------	-------	-----	-------------	------	------	-------	------	-------

F.B.#16

7/23/24 RFAAP(UNIT-5)/547076/KFC-ABP

F.B.#16

5WC23 DTW: 8.62 CB: 25 Begin Purge (1204)

P/Purge DTW: 8.75

Initial Purge - clear

Time	Temp ^{°C}	Cond. ^{µS} /cm	DO ^{mg} /L	pH	Turb ^(NTU)	ORP ^(mV)	DTW	Desc.
(1205)	17.56	887	1.39	6.86	1.12	121.8	8.76	clear
(1210)	16.51	858	1.27	6.81	1.97	123.2	8.75	clear
(1215)	16.77	846	0.81	6.77	0.69	118.7	8.75	clear
(1220)	16.69	844	0.57	6.76	0.65	113.7	8.78	clear
(1225)	16.75	844	0.48	6.78	1.00	110.3	8.75	clear
(1230)	16.96	848	0.35	6.78	1.15	107.4	8.75	clear
(1230)	Readings Stable							

Sample Time (1235)

Samples Collected: (3) 8260D, (1) TM

(1237) 16.82 850 0.49 6.81 2.01 110.7 8.75 clear

5WC21 DTW: 9.40 CB: 12 Begin Purge (1249)

P/Purge DTW: 9.47

Initial Purge - clear

Time	Temp ^{°C}	Cond. ^{µS} /cm	DO ^{mg} /L	pH	Turb ^(NTU)	ORP ^(mV)	DTW	Desc.
(1240)	17.84	474	2.13	5.62	2.23	169.7	9.40	clear
(1245)	17.25	509	1.59	5.66	2.23	186.5	9.43	clear
(1250)	15.71	489	0.95	5.56	1.72	194.6	9.45	clear
(1255)	15.75	474	0.99	5.48	1.45	198.5	9.46	clear
(1300)	15.84	471	1.00	5.49	1.43	198.5	9.45	clear
(1305)	15.91	470	1.08	5.47	1.05	196.7	9.46	clear
(1305)	Readings Stable							

Sample Time (1310)

Samples Collected: (3) 8260D, (1) TM

(1314) 16.11 468 0.95 5.46 1.20 197.6 9.47 clear

Sample Time (OC) (1330)

5WC21 Sample Time (1310) //


* collected from

Samples Collected: (3) 8260D, (1) TM

SAMPLE 5WC21
(7-23-24)

General Notes-

- Weather- Early fog, mostly cloudy w/ T-storm 70°s
- PPE- Nitrile gloves, eye protection & safety boots
- Calibrations- HANNA Multimeter
pH: 4.00 = 4.00, 7.00 = 7.00, 10.00 = 10.00
Conductivity reads 1413 $\mu\text{S}/\text{cm}$ in a 1413 $\mu\text{S}/\text{cm}$ std.
D.O. % = 97.2 %
- HACH 2100Q Turbidimeter: 0.02-1000 NTU
- Dedicated well skirts used at each well.
- All equipment decontaminated before & after event and between use at each sample location.
- All purge water collected & disposed of at a dedicated on-site location.
- All samples collected, transported & stored on ice in coolers
- Sample collection order: See specific sample ID
- All wells purged & sampled at 0.25 L/MIN
- All NTW's measured in feet.

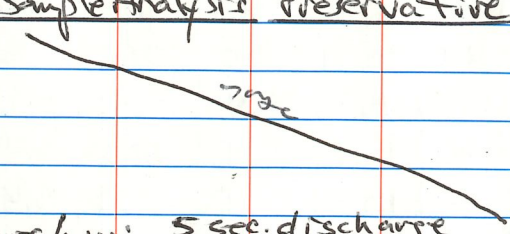Sample Analysis	Preservative	Sample Analysis	Preservative
8260D/C	HCL		
8270E	-		
6020B/7470A	HNO ₃		
CYANIDE	NaOH		

- Bladder pump setting: 4 CYCLES/MIN: 5 sec. discharge 10 sec. recharge
- VOA's collected from one pulse from bladder pump.

CONFIDENCE SOLUTION VALUE RANGE

BATCH #: 22G1C

DATE OPENED: 07/01/24

TEMP(°C)	COND $\mu\text{S}/\text{cm}$	ORP(mV)	pH
Actual / Range	Actual / Range	Actual / Range	Actual / Range
PRE: 14.0 / 11-15	7721 / 7600-7970	248 / 229-261	6.99 / 6.8-7.2
POST: 17.2 / 16-20	7796 / 7630-7970	239 / 223-252	7.00 / 6.8-7.2

F.B.#16

7/30/24 - RFAAP (UNIT-16) / 547076 / KFC - ASP

F.B.#16

STATIC WATER LEVEL TABLE (Measured in Feet)

WELL	DTW	P/PURGE DTW	NOTES	Well	DTW	P/PURGE DTW	NOTES
16-2	55.83	55.85	Pad okay	16MW9	66.10	67.22	Pad okay
16-3	56.62	63.02	Pad okay	16C1	48.91	48.91	Pad okay
16-5	4.70	9.92	Pad okay	SWL'S ONLY			
16WC2B	54.34	63.82	Pad okay	16C3	67.54		Pad okay
16WC1B	69.35		Pad okay	16CDH3	Dry @ 68.55		Pad okay
16WC1A	69.75	70.46	Pad okay	16WC2A	Dry @ 61.91		Pad okay
16MW8	73.91	T.O.P 75.85	Pad okay	16-1	46.69		Pad okay

16-5: DTW = 4.70

CB

Begin Purge (0823)

P/PURGE DTW = 9.92

29

Initial Purge - clear

TIME	TEMP (°C)	COND (µS)	DO (ppm)	pH	TURB (NTU)	ORP (mV)	DTW	Desc.
0825	16.82	516	3.68	7.16	1.20	197.5	5.59	clear
0830	15.55	488	2.69	6.97	0.83	205.5	6.32	clear
0835	15.61	486	2.20	6.97	0.55	196.7	7.42	clear
0840	15.76	486	2.16	7.06	0.57	188.7	8.02	clear
0845	15.70	486	1.88	7.18	0.82	177.9	8.72	clear
0850	15.51	484	1.85	7.25	0.62	171.9	9.23	clear
0855	15.51	484	1.82	7.26	0.54	168.8	9.63	clear
0855	Readings stable							

Sample Time (0900)

Samples Collected: (3) 8260D, (2) 8270E, (1) TM

(0904)	15.50	484	1.92	7.30	0.57	166.3	9.92	clear
--------	-------	-----	------	------	------	-------	------	-------

16 SPRING

Time	Temp (°C)	Cond (µS)	DO (ppm)	pH	ORP (mV)	Turb (NTU)	Desc.
(0907)	14.40	523	5.64	7.40	95.3	3.51	clear

Sample Time (0910)

Samples Collected: (3) 8260D, (2) 8270E, (1) TM

16WC2B DTW: 54.34 CB: 62 Begin Purge (0928)

P/Purge DTW: 63.82 Initial Purge - clear

Time	Temp	Cond. μ m	DO $\frac{mg}{L}$	pH	ORP mV	Turb $\frac{NTU}{cm}$	DTW	Desc.
(0929)	18.20	290	8.57	7.69	142.7	0.87	56.01	clear
(0934)	15.56	290	0.60	7.80	57.2	0.71	57.29	clear
(0939)	15.30	290	0.23	7.77	43.1	0.51	58.76	clear
(0944)	15.27	289	0.18	7.73	45.3	0.60	59.51	clear
(0949)	15.34	289	0.09	7.74	37.4	0.47	61.08	clear
(0954)	15.32	289	0.13	7.72	38.9	0.40	62.45	clear

(0954) Readings stable

Sample Time (0955)

Samples Collected: (3) 8260D, (2) 8276E, (1) TM

(1000) 15.98 289 0.36 7.80 49.4 0.59 63.82 clear

16-2 DTW: 55.83 CB: 50 Begin Purge (1011)

P/Purge DTW: 55.85 Initial Purge - clear

Time	Temp	Cond. μ m	DO $\frac{mg}{L}$	pH	ORP mV	Turb $\frac{NTU}{cm}$	DTW	Desc.
(1012)	15.99	563	6.96	7.12	149.4	0.55	55.85	clear
(1017)	15.54	572	5.28	6.98	158.8	0.91	55.85	clear
(1022)	15.22	567	5.56	6.96	165.8	0.72	55.85	clear
(1027)	15.39	564	5.55	6.96	169.5	0.80	55.85	clear
(1032)	15.93	560	5.44	6.94	169.7	0.89	55.85	clear
(1037)	15.51	557	5.51	6.94	172.4	0.44	55.85	clear

(1037) Readings stable

Sample Time (1040)

Samples Collected: (3) 8260D, (2) 8270E, (1) TM

(1043) 16.38 555 5.40 6.94 173.9 0.70 55.85 clear

F.B.#16

7/30/24 - PCAAP (UNIT-16) / 547076 / ILFC - ABP

F.B.#16

8)

clear

Desc.

clear

clear

clear

clear

clear

clear

16 MW8

DTW: 73.91

CB: 1

Begin Purge (1119)

P/Purge DTW: 75.85 (TAP) (APR) 51.45

Initial Purge - Clear

Time	Temp	Cond	DO $\frac{mg}{L}$	pH	ORP mV	Turb NTU	DTW	Desc.
(1120)	17.63	141	1.01	5.48	251.9	1.61	74.21	clear
(1125)	16.77	135	≤ 0.01	5.08	262.4	2.22	74.55	clear
(1130)	17.29	128	≤ 0.01	5.05	256.8	3.07	74.71	clear
(1135)	18.26	124	≤ 0.01	5.08	245.4	2.75	74.86	clear
(1140)	18.74	123	≤ 0.01	5.07	241.4	3.81	74.99	clear
(1145)	18.85	124	≤ 0.01	5.08	236.9	3.07	75.11	clear
(1145)	Readings stable							

Sample Time (1150)

Samples Collected: (6) 8260D, (3) 8260C, (8) 8270E, (1) TM, (1) cyanide
 (1214) 21.04 134 ≤ 0.01 5.14 232.4 2.97 T.O.P (75.85)

* Allowing recharge for (3) 8270E 1-L bottles.

011)

clear

w Desc.

35 clear

35 clear

35 clear

35 clear

5 clear

clear

16-3

DTW: 56.62

CB: 48

Begin Purge (1222)

P/Purge DTW: 63.02

Initial Purge - Clear

Time	Temp	Cond	DO $\frac{mg}{L}$	pH	ORP mV	Turb NTU	DTW	Desc.
(1223)	19.79	213	5.04	7.05	148.5	2.46	57.50	clear
(1228)	17.13	217	3.63	7.59	139.0	3.08	58.47	clear
(1233)	16.69	217	3.25	7.64	147.1	1.08	60.38	clear
(1238)	17.74	216	3.15	7.53	155.7	1.22	60.99	clear
(1243)	18.21	210	3.13	7.95	129.4	1.08	61.15	clear
(1248)	18.27	217	3.19	7.97	131.4	0.89	61.42	clear
(1253)	17.66	215	3.11	7.91	140.7	1.14	61.98	clear
(1258)	Readings stable							

Sample Time (1255)

Samples Collected: (3) 8260D, (2) 8270E, (1) TM

() 19.31 213 2.99 7.89 138.8 0.88 63.02 clear

General Notes:

- Weather: Sunny, calm & 70-80°s
- PPE: Nitrile gloves, eye protection & safety boots
- Calibrations: HANNA Multimeter

pH: 4.00 = 4.00, 7.00 = 7.00, 10.00 = 10.00

Conductivity read 1413 $\frac{\mu S}{cm}$ in a 1413 $\frac{\mu S}{cm}$ standard

D.O.% = 99.0%

HACH 2100Q Turbiditymeter: 0.02 - 1000 NTU

- Dedicated well skirts & tubing used at each well.
- All equipment deconned before & after event and between use at each sample location.
- All purge water collected & disposed of at a dedicated, on-site location.
- All samples collected, transported & stored on ice & in coolers.
- Sample collection order: 8260C/D, 8270D/E, TM & CN.
- All wells purged & sampled at 0.25 L/MIN.
- All DTW's measured in feet.

Sample Analysis	Preservative	Sample Analysis	Preservative
8260C/D	HCL	TM	HNO ₃
8270D/E	—	CN	NaOH

- VOA's collected from one pulse from bladder pump.
- Bladder pump setting: 4 cycles/MIN ^{8 second discharge} / ^{10 second recharge}

CONFIDENCE SOLUTION VALUE RANGE

BATCH#: 22G1C

DATE OPENED: 7/01/24

TEMP(°C)	COND $\frac{\mu S}{cm}$	ORP(mV)	pH
Actual/Range	Actual/Range	Actual/Range	Actual/Range
PRE- 13.8 / 11-15	7703 / 7600-7970	235 / 229-261	6.93 / 6.8-7.2
POST- 18.9 / 16-20	7831 / 7630-7970	250 / 222-252	7.04 / 6.8-7.2

F.B.#16

7/31/24 • RFAAP (UNIT-16) / 547076 / KFC-ABP F.B.#16

16 WCIB: * Well bailed using 36" bailer

TD: 75.15

Begin Purge (0825)

DTW: 69.35

Initial Purge - slightly cloudy

5.8 * 0.163 = 0.95 x 3 = 2.84 gallons

TIME	TEMP (°C)	COND ^{MS} / CM	DO ^{MS} / CM	pH	TURB ^{NTU} / CMV	ORP ^{CMV}	DTW	DESC.
(0826)	14.77	404	3.46	6.50	41.2	202.3	1	0.25 slightly cloudy
(0830)	13.85	456	3.34	6.33	5.67	209.4	15	1.25 clear
(0834)	13.94	440	2.82	6.35	8.48	207.9	89	2.25 clear
(0837)	14.02	367	1.30	6.26	13.6	201.3	12	3.0 clear
(0837)	Well purged ~ 3.0 gallons							

Sample Time (1055)

Turbidity at Sample Time = 9.38 NTU

Samples collected: (6) 8260D, (3) 8260C, (8) 8270E, (1) TM

* (1) CN

(APP) (7/31)

(ms/msd)

16 WCIB: DTW: 69.75

Purge DTW: 70.46

CIB
58

Begin Purge (0849)

Initial Purge - clear

TIME	TEMP (°C)	COND ^{MS} / CM	DO ^{MS} / CM	pH	TURB ^{NTU} / CMV	ORP ^{CMV}	DTW	DESC.
(0850)	16.43	543	7.63	7.52	2.70	129.8	69.79	clear
(0855)	15.00	630	0.29	6.75	0.61	44.6	70.50	clear
(0900)	15.03	630	0.15	6.76	0.71	41.3	70.59	clear
(0905)	15.03	639	≤ 0.01	6.74	0.51	-30.6	70.55	clear
(0910)	15.09	647	≤ 0.01	6.77	0.59	-46.1	70.55	clear
(0915)	15.11	650	≤ 0.01	6.78	0.72	-48.3	70.55	clear
(0920)	15.23	652	≤ 0.01	6.78	0.68	-49.4	70.55	clear

(0920) Readings Stable

(AT)

Sample Time (0925)

Samples Collected: (1) 8260D, (1) 8270E, (3) TM, (3) Cyanide, (6) 8270E-Enthalpy

(APP) (7/31)
(6) 8270E-GEL, (6) 8270E-TestAmerica

(107) 17.53 664 ≤ 0.01 6.72 1.10 -40.3 70.46 clear

7/31/24 RFAAP (UNIT-16) / 547076 / KFC-ABP

F.B.#16

16W DUP

Sample Time (0925) / Sample Time (0955)

Samples Collected: (9) 8260D, (8) 8270E, (1) TM, (1) Cyanide

* Collected From well 16W1CA *

16W9: DTW: 66.10

CB: 46

Begin Purge (1119)

P/Purge DTW: 67.22

Initial Purge - slightly cloudy

TIME	TEMP (°C)	COND ^{MS}	DO ^{mg/L}	pH	Turb ^{NTU}	ORP ^{mV}	DTW	Desc.
(1120)	16.47	798	4.14	6.87	17.3	30.5	66.76	slightly cloudy
(1125)	17.04	826	1.33	6.62	5.41	5.5	67.16	clear
(1130)	16.92	825	1.27	6.59	5.05	9.3	67.15	clear
(1135)	16.80	825	1.18	6.57	4.16	10.0	67.15	clear
(1140)	16.87	814	0.99	6.59	4.04	8.9	67.22	clear
(1145)	16.98	811	1.06	6.63	4.08	4.5	67.20	clear
(1150)	17.01	806	1.05	6.65	2.05	3.4	67.26	clear

(1150) Readings stable

Sample Time (1155)

Samples Collected: (12) 8260D, (8) 8270E, (1) TM, (1) Cyanide

(1220) 19.47 812 1.27 6.67 2.77 1.7 67.22 clear

16C1 DTW: 48.91

CB: 47

Begin Purge (1234)

P/Purge DTW: 48.91

Initial Purge - Clear

Time	Temp ^{°C}	Cond ^{µm}	DO ^{mg/L}	ORP ^{mV}	pH	Turb ^{NTU}	DTW	Desc.
(1235)	18.35	609	4.39	110.6	6.79	1.68	48.91	clear
(1240)	16.23	675	1.01	53.7	6.52	1.20	48.91	clear
(1245)	16.30	635	0.78	84.6	6.30	1.80	48.91	clear
(1250)	16.51	628	0.63	95.3	6.30	1.23	48.91	clear
(1255)	16.35	629	0.48	93.3	6.38	1.04	48.91	clear
(1300)	16.24	630	0.33	92.0	6.40	0.78	48.91	clear

(1300) Readings stable

Sample Time (1305)

Samples Collected: (12) 8260D, (8) 8270E, (1) TM, (1) Cyanide

(1317) 18.97 621 1.15 104.3 6.45 1.10 48.91 clear

(18)

APPENDIX E
CORRESPONDENCE



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

P.O. Box 1105, Richmond, Virginia 23218

(800) 592-5482 FAX (804) 698-4178

www.deq.virginia.gov

Travis A. Voyles
Acting Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

May 9, 2022

Mr. Len DiIorio Jr
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: 2021 Annual Groundwater Monitoring Report for
Hazardous Waste Management Units 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. DiIorio:

This letter acknowledges the receipt and review of the 2021 Annual Groundwater Monitoring Report for Hazardous Waste Management Units (HWMU) 5 & 16 dated December 2021, submitted to the Virginia Department of Environmental Quality (Department or DEQ), Office of Remediation Programs (ORP) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

There were reportedly no new-targeted constituents detected during the groundwater monitoring activities conducted during the second or fourth quarters of 2021 for HWMU-5 or -16. As previously noted, the Department acknowledges the presence of barium above the site-specific background concentration. The Department recognizes that the variability of the lithology in the area of HWMU-16 could potentially explain the variation of this element. No further investigation is required at this time; however, the Department may request further investigation if the barium levels in groundwater increase in the future.

The Department accepts the report as complete. However, the Department does want to acknowledge that several constituents were reported above the permit specified quantitation and/or detection limits. The Department does not require any action, however encourages RFAAP to engage laboratories that can routinely achieve these permit levels.

EPA ID#: VA1210020730

May 9, 2022

Page 2 of 2

If you have any questions regarding this correspondence, you may contact me at 703-232-4200 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Kurt W. Kochan", with a horizontal line extending to the right.

Kurt W. Kochan
Office of Remediation Programs

cc: RFAAP Correspondence File
Tara Mason, Ashby Scott, DEQ-CO
Melissa Lincoln, BAE
Mike Lawless, DAA



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

P.O. Box 1105, Richmond, Virginia 23218

(800) 592-5482 FAX (804) 698-4178

www.deq.virginia.gov

Travis A. Voyles
Acting Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

December 1, 2023

Dear Interested Stakeholder:

This letter shares information about the updated Default 10^{-6} Alternate Concentration Limits (ACL) Table, effective January 1, 2024. The new, updated ACL Table issued as "Draft" (see attached) reflects the updates in the EPA Regional Screening Level (RSL) Table through May 2023.

The RSL update established new values for only one constituent: isobutyl alcohol. No other ACL values from the previous Solid Waste ACL Table have changed as a result of these modifications. The constituent with updated values is not believed to be common at solid waste facilities, therefore no impacts to the solid waste landfill groundwater monitoring programs within the Commonwealth are anticipated from this update. Please review the table and contact the Department if you have any questions regarding your 2024 groundwater monitoring program.

Please keep in mind that for chemicals with a Maximum Contaminant Level (MCL), the MCL will continue to be the groundwater protection standard (GPS). For metals, the regulations allow site specific background to be used upon Department approval instead of the ACL. Please note that copper and lead do not have an MCL but have an 'action level.' For the purpose of setting the Groundwater Protection Standard, these action levels are treated as MCLs.

In some instances, use of site specific ACLs may be warranted. Any proposed use of 10^{-5} ACL values should meet all of the technical criteria described in "Submission Instruction #28 For Applying For Site-Specific Alternate Concentration Limits At Solid Waste Landfills In Areas With Public Water Supplies (version date = January, 2015)" and the related Frequently Asked Questions (FAQ) document. Contact the Department if you have questions regarding such application.

If you have technical questions on ACL development, please contact Kyle Newman at (804) 912-3674 or kyle.newman@deq.virginia.gov. For further questions regarding the effect of the ACL use in groundwater monitoring or corrective action, please contact your regional office or the program Coordinator, Geoff Christe at (804) 912-3674 or geoff.christe@deq.virginia.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Brent Williams", with a long horizontal flourish extending to the right.

Brent Williams
Director, Office of Financial Responsibility & Waste Programs

Encl:

1. Default ACL Table Draft Update, December, 2023 (lower of 10^{-6} cancer risk and HQ =1)
2. Change log

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL Changes Summary
Based on EPA RSL: May 2023

The following compounds were updated due to value changes to EPA RSL values published between May 2022 and May 2023.

CAS No.	Constituent	Updated ACL: Nov 203	Current ACL: Nov 2021	Reason for Change
78-83-1	Isobutyl Alcohol	730	5900	RfCi Value Added

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

ACL for VSWMR Table 3.1 Constituents

Refer to the notes provided at the end of this table for additional information

N	= No	I	= IRIS
Y	= YES	P	= PPRTV
RSL	= Regional Screening Level	O	= OPP
VOC	= Volatile Organic Compound	A	= ATSDR
V	= Volatile	D	= OW
M	= Mutagen	C	= Cal EPA
ACL	= Alternate Concentration Limit (µg/L)	X	= PPRTV Screening Level
MCL	= Maximum Contaminant Level (µg/L)	H	= HEAST
CAS RN	= Chemical Abstracts Service Registry Number	G	= See RSL User's Guide
SFO	= Oral Slope Factor (mg/kg-day)	W	= TEF applied
IUR	= Inhalation Unit Risk (µg/m ³)-1	E	= RPF applied
RfDo	= Chronic Oral Reference Dose (mg/kg-day)	c	= cancer
RfCi	= Chronic Inhalation Reference Concentration (mg/m ³)	n	= noncancer

CAS RN	Constituent	VOC	Mutagen	SFO (mg/kg- day)-1	k e y	IUR (µg/m ³)-1	k e y	RfDo (mg/kg- day)	k e y	RfCi (mg/m ³)	k e y	ACL 1E-6/1 (µg/L)	k e y	MCL (µg/L)
83-32-9	Acenaphthene	V						6.00E-02	I			530	n	
208-96-8	Acenaphthylene	V												
67-64-1	Acetone	V						9.00E-01	I			18000	n	
75-05-8	Acetonitrile; Methyl cyanide	V								6.00E-02	I	130	n	
98-86-2	Acetophenone	V						1.00E-01	I			1900	n	
53-96-3	2-Acetylaminofluorene; 2-AAF			3.80E+00	C	1.30E-03	C					0.016	c	
107-02-8	Acrolein	V						5.00E-04	I	2.00E-05	I	0.042	n	
107-13-1	Acrylonitrile	V		5.40E-01	I	6.80E-05	I	1.00E-02	A	2.00E-03	I	0.052	c	
309-00-2	Aldrin	V		1.70E+01	I	4.90E-03	I	3.00E-05	I			0.00092	c	
107-05-1	Allyl chloride	V		2.10E-02	C	6.00E-06	C			1.00E-03	I	0.73	c	
319-84-6	alpha-BHC			6.30E+00	I	1.80E-03	I					0.0072	c	
92-67-1	4-Aminobiphenyl			2.10E+01	C	6.00E-03	C					0.003	c	
120-12-7	Anthracene	V						3.00E-01	I			1800	n	
7440-36-0	Antimony (Total)							4.00E-04	I	3.00E-04	A	7.8	n	6
7440-38-2	Arsenic (Total)			1.50E+00	I	4.30E-03	I	3.00E-04	I	1.50E-05	C	0.052	c	10
7440-39-3	Barium (Total)							2.00E-01	I	5.00E-04	H	3800	n	2000
71-43-2	Benzene	V		5.50E-02	I	7.80E-06	I	4.00E-03	I	3.00E-02	I	0.46	c	5
56-55-3	Benzo[a]anthracene; Benzanthracene	V	M	1.00E-01	E	6.00E-05	E					0.03	c	
50-32-8	Benzo[a]pyrene		M	1.00E+00	I	6.00E-04	I	3.00E-04	I	2.00E-06	I	0.025	c	0.2
205-99-2	Benzo[b]fluoranthene		M	1.00E-01	E	6.00E-05	E					0.25	c	
191-24-2	Benzo[ghi]perylene	V												
207-08-9	Benzo[k]fluoranthene		M	1.00E-02	E	6.00E-06	E					2.5	c	

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

100-51-6	Benzyl alcohol							1.00E-01	P			2000	n	
7440-41-7	Beryllium (Total)				I	2.40E-03	I	2.00E-03	I	2.00E-05	I	25	n	4
319-85-7	beta-BHC			1.80E+00	I	5.30E-04	I					0.025	c	
111-91-1	Bis(2-chloroethoxy)methane							3.00E-03	P			59	n	
111-44-4	Bis(2-chloroethyl) ether; Dichloroethyl ether	V		1.10E+00	I	3.30E-04	I					0.014	c	
108-60-1	Bis(2-chloro-1-methylethyl) ether; 2, 2'-Dichlorodiisopropyl ether; DCIP	V						4.00E-02	I			710	n	
117-81-7	Bis(2-ethylhexyl)phthalate (DEHP)			1.40E-02	C	2.40E-06	C	2.00E-02	I			5.6	c	6
74-97-5	Bromochloromethane; Chlorobromomethane	V								4.00E-02	X	83	n	
75-27-4	Bromodichloromethane; Dibromochloromethane (THM)	V		6.20E-02	C	3.70E-05	C	8.00E-03	P			0.13	c	80
75-25-2	Bromoform; Tribromomethane (THM)	V		7.90E-03	I	1.10E-06	I	2.00E-02	I			3.3	c	80
101-55-3	4-Bromophenyl phenyl ether													
85-68-7	Butyl benzyl phthalate; Benzyl butyl phthalate			1.90E-03				2.00E-01	I			16	c	
7440-43-9	Cadmium (Total)				I	1.80E-03	I	1.00E-04	A	1.00E-05	A	1.8	n	5
75-15-0	Carbon disulfide	V						1.00E-01	I	7.00E-01	I	810	n	
56-23-5	Carbon tetrachloride	V		7.00E-02	I	6.00E-06	I	4.00E-03	I	1.00E-01	I	0.46	c	5
12789-03-6	Chlordane	V		3.50E-01	I	1.00E-04	I	5.00E-04	I	7.00E-04	I	0.02	c	2
108-90-7	Chlorobenzene	V						2.00E-02	I	5.00E-02	P	78	n	100
510-15-6	Chlorobenzilate			1.10E-01	C	3.10E-05	C	2.00E-02	I			0.31	c	
75-00-3	Chloroethane; Ethyl chloride	V								4.00E+00	P	8300	n	
67-66-3	Chloroform; Trichloromethane (THM)	V		3.10E-02	I	2.30E-05	I	1.00E-02	I	9.80E-02	A	0.22	c	80
91-58-7	2-Chloronaphthalene	V						8.00E-02	I			750	n	
95-57-8	2-Chlorophenol	V						5.00E-03	I			91	n	
7005-72-3	4-Chlorophenyl phenyl ether													
126-99-8	Chloroprene	V			I	3.00E-04	I	2.00E-02	H	2.00E-02	I	0.019	c	
7440-47-3	Chromium (Total)													100
218-01-9	Chrysene		M	1.00E-03	E	6.00E-07	E					25	c	
156-59-2	cis-1,2-Dichloroethylene; cis-1,2-Dichloroethene	V						2.00E-03	I	4.00E-02	X	25	n	70
10061-01-5	cis-1,3-Dichloropropene	V												
7440-48-4	Cobalt (Total)				P	9.00E-03	P	3.00E-04	P	6.00E-06	P	6	n	
7440-50-8	Copper (Total)							4.00E-02	H			800	n	1300
57-12-5	Cyanide	V						6.00E-04	I	8.00E-04	G	1.5	n	200
94-75-7	2,4-D; 2,4-Dichlorophenoxyacetic acid							1.00E-02	I			170	n	70
72-54-8	4,4'-DDD			2.40E-01	C	6.90E-05	C	5.00E-04	A			0.032	c	
72-55-9	4,4'-DDE	V		3.40E-01	C	9.70E-05	C	5.00E-04	A			0.046	c	
50-29-3	4,4'-DDT			3.40E-01	I	9.70E-05	I	5.00E-04	I			0.23	c	
319-86-8	delta-BHC													
2303-16-4	Diallate			6.10E-02								0.54	c	
53-70-3	Dibenz[a,h]anthracene		M	1.00E+00	E	6.00E-04	E					0.025	c	
132-64-9	Dibenzofuran	V						1.00E-03	X			7.9	n	
106-93-4	1,2-Dibromoethane; Ethylene dibromide; EDB	V		2.00E+00	I	6.00E-04	I	9.00E-03	I	9.00E-03	I	0.0075	c	0.05
124-48-1	Dibromochloromethane; Chlorodibromomethane (THM)	V		8.40E-02				2.00E-02	I			0.87	c	80
96-12-8	1,2-Dibromo-3-chloropropane; DBCP	V	M	8.00E-01	P	6.00E-03	P	2.00E-04	P	2.00E-04	I	0.00033	c	0.2
91-94-1	3,3'-Dichlorobenzidine			4.50E-01	C	3.40E-04	C					0.13	c	

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

75-71-8	Dichlorodifluoromethane; CFC 12;	V						2.00E-01	I	1.00E-01	X	200	n	
107-06-2	1,2-Dichloroethane; Ethylene dichloride	V		9.10E-02	I	2.60E-05	I	6.00E-03	X	7.00E-03	P	0.17	c	5
75-34-3	1,1-Dichloroethane; Ethylidene chloride	V		5.70E-03	C	1.60E-06	C	2.00E-01	P			2.8	c	
75-35-4	1,1-Dichloroethylene; 1,1-Dichloroethene; Vinylidene chloride	V						5.00E-02	I	2.00E-01	I	280	n	7
87-65-0	2,6-Dichlorophenol													
120-83-2	2,4-Dichlorophenol							3.00E-03	I			46	n	
594-20-7	2, 2-Dichloropropane; isopropylidene chloride													
78-87-5	1,2-Dichloropropane; Propylene dichloride	V		3.70E-02	P	3.70E-06	P	4.00E-02	P	4.00E-03	I	0.85	c	5
142-28-9	1,3-Dichloropropane; Trimethylene dichloride	V						2.00E-02	P			370	n	
563-58-6	1,1-Dichloropropene													
60-57-1	Dieldrin			1.60E+01	I	4.60E-03	I	5.00E-05	I			0.0018	c	
84-66-2	Diethyl phthalate							8.00E-01	I			15000	n	
60-51-5	Dimethoate							2.20E-03	O			44	n	
131-11-3	Dimethyl phthalate													
57-97-6	7,12-Dimethylbenz[a]anthracene		M	2.50E+02	C	7.10E-02	C					0.0001	c	
119-93-7	3,3'-Dimethylbenzidine			1.10E+01								0.0065	c	
105-67-9	2,4-Dimethylphenol; m-Xylenol							2.00E-02	I			360	n	
84-74-2	Di-n-butyl phthalate							1.00E-01	I			900	n	
534-52-1	4,6-Dinitro-o-cresol; 4,6-Dinitro-2-methylphenol							8.00E-05	X			1.5	n	
51-28-5	2,4-Dinitrophenol							2.00E-03	I			39	n	
121-14-2	2,4-Dinitrotoluene			3.10E-01	C	8.90E-05	C	2.00E-03	I			0.24	c	
606-20-2	2,6-Dinitrotoluene			1.50E+00				3.00E-04	X			0.049	c	
117-84-0	Di-n-octyl phthalate							1.00E-02	P			200	n	
88-85-7	Dinoseb; DNBP; 2-sec-Butyl-4,6-dinitrophenol							1.00E-03	I			15	n	7
122-39-4	Diphenylamine							1.00E-01	O			1300	n	
298-04-4	Disulfoton							4.00E-05	I			0.5	n	
959-98-8	Endosulfan I	V												
33213-65-9	Endosulfan II	V												
1031-07-8	Endosulfan sulfate							6.00E-03	P			110	n	
72-20-8	Endrin							3.00E-04	I			2.3	n	2
7421-93-4	Endrin aldehyde													
97-63-2	Ethyl methacrylate	V								3.00E-01	P	630	n	
100-41-4	Ethylbenzene	V		1.10E-02	C	2.50E-06	C	5.00E-02	P	1.00E+00	I	1.5	c	700
62-50-0	Ethylmethanesulfonate													
52-85-7	Famphur													
206-44-0	Fluoranthene							4.00E-02	I			800	n	
86-73-7	Fluorene	V						4.00E-02	I			290	n	
58-89-9	gamma-BHC; Lindane			1.10E+00	C	3.10E-04	C	3.00E-04	I			0.042	c	0.2
76-44-8	Heptachlor	V		4.50E+00	I	1.30E-03	I	1.00E-04	A			0.0014	c	0.4
1024-57-3	Heptachlor epoxide	V		9.10E+00	I	2.60E-03	I	1.30E-05	I			0.0014	c	0.2
118-74-1	Hexachlorobenzene	V		1.60E+00	I	4.60E-04	I	1.00E-05	P			0.0098	c	1
87-68-3	Hexachlorobutadiene	V		7.80E-02	I	2.20E-05	I	1.00E-03	P			0.14	c	
77-47-4	Hexachlorocyclopentadiene	V						6.00E-03	I	2.00E-04	I	0.41	n	50

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

67-72-1	Hexachloroethane	V		4.00E-02	C	1.10E-05	C	7.00E-04	I	3.00E-02	I	0.33	c	
1888-71-7	Hexachloropropene													
591-78-6	2-Hexanone; Methyl butyl ketone	V						5.00E-03	I	3.00E-02	I	38	n	
193-39-5	Indeno[1,2,3-cd]pyrene		M	1.00E-01	E	6.00E-05	E					0.25	c	
78-83-1	Isobutyl alcohol	V						3.00E-01	I	4.00E-01	X	730	n	
465-73-6	Isodrin													
78-59-1	Isophorone			9.50E-04				2.00E-01	I	2.00E+00	C	78	c	
120-58-1	Isosafrole													
143-50-0	Kepone			1.00E+01	C	4.60E-03	C	3.00E-04	I			0.0035	c	
7439-92-1	Lead (Total)											15	G	15
108-39-4	m-Cresol; 3-methyphenol							5.00E-02	I	6.00E-01	C	930	n	
541-73-1	m-Dichlorobenzene; 1,3-Dichlorobenzene	V												
99-65-0	m-Dinitrobenzene							1.00E-04	I			2	n	
7439-97-6	Mercury (Total)	V								3.00E-04	I	0.63	n	2
126-98-7	Methacrylonitrile	V						1.00E-04	I	3.00E-02	P	1.9	n	
91-80-5	Methapyrilene													
72-43-5	Methoxychlor							5.00E-03	I			37	n	40
74-83-9	Methyl bromide; Bromomethane	V						1.40E-03	I	5.00E-03	I	7.5	n	
74-87-3	Methyl chloride; Chloromethane	V								9.00E-02	I	190	n	
78-93-3	Methyl ethyl ketone; MEK; 2-Butanone	V						6.00E-01	I	5.00E+00	I	5600	n	
74-88-4	Methyl iodide; Iodomethane													
80-62-6	Methyl methacrylate	V						1.40E+00	I	7.00E-01	I	1400	n	
66-27-3	Methyl methanesulfonate			9.90E-02	C	2.80E-05	C					0.79	c	
298-00-0	Methyl parathion; Parathion methyl methyl							2.50E-04	I			4.5	n	
56-49-5	3-Methylcholanthrene		M	2.20E+01	C	6.30E-03	C					0.0011	c	
74-95-3	Methylene bromide; Dibromomethane	V								4.00E-03	X	8.3	n	
75-09-2	Methylene chloride; Dichloromethane	V	M	2.00E-03	I	1.00E-08	I	6.00E-03	I	6.00E-01	I	11	c	5
91-57-6	2-Methylnaphthalene	V						4.00E-03	I			36	n	
108-10-1	4-Methyl-2-pentanone; Methyl isobutyl ketone (MIBK)	V								3.00E+00	I	6300	n	
99-09-2	m-Nitroaniline; 3-Nitroaniline													
91-20-3	Naphthalene	V		1.20E-01	C	3.40E-05	C	2.00E-02	I	3.00E-03	I	0.12	c	
130-15-4	1,4-Naphthoquinone													
134-32-7	1-Naphthylamine													
91-59-8	2-Naphthylamine			1.80E+00	C	0.00E+00	C					0.039	c	
7440-02-0	Nickel (Total)				C	2.60E-04	C	2.00E-02	I	9.00E-05	A	390	n	
98-95-3	Nitrobenzene	V			I	4.00E-05	I	2.00E-03	I	9.00E-03	I	0.14	c	
99-55-8	5-Nitro-o-toluidine			9.00E-03				2.00E-02	X			8.2	c	
55-18-5	N-Nitrosodiethylamine		M	1.50E+02	I	4.30E-02	I					0.00017	c	
62-75-9	N-Nitrosodimethylamine	V	M	5.10E+01	I	1.40E-02	I	8.00E-06	P	4.00E-05	X	0.00011	c	
924-16-3	N-Nitrosodi-n-butylamine	V		5.40E+00	I	1.60E-03	I					0.0027	c	
86-30-6	N-Nitrosodiphenylamine			4.90E-03	C	2.60E-06	C					12	c	
621-64-7	N-Nitrosodipropylamine; N-Nitroso-N-dipropylamine; Di-n-propylnitrosami			7.00E+00	C	2.00E-03	C					0.011	c	
10595-95-6	N-Nitrosomethylethalamine	V		2.20E+01	C	6.30E-03	C					0.00071	c	

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

100-75-4	N-Nitrosopiperidine			9.40E+00	C	2.70E-03	C					0.0082	c	
930-55-2	N-Nitrosopyrrolidine			2.10E+00	I	6.10E-04	I					0.037	c	
95-48-7	o-Cresol; 2-methyphenol							5.00E-02	I	6.00E-01	C	930	n	
95-50-1	o-Dichlorobenzene; 1,2-Dichlorobenzene	V						9.00E-02	I	2.00E-01	H	300	n	600
88-74-4	o-Nitroaniline; 2-Nitroaniline							1.00E-02	X	5.00E-05	X	190	n	
88-75-5	o-Nitrophenol; 2-Nitrophenol													
297-97-2	O,O-Diethyl O-2-pyrazinyl phosphorothioate; Thionazin													
126-68-1	O,O,O-Triethyl phosphorothioate													
95-53-4	o-Toluidine			1.60E-02	C	5.10E-05	C					4.7	c	
56-38-2	Parathion							6.00E-03	H			86	n	
106-47-8	p-Chloroaniline			2.00E-01				5.00E-04	P			0.37	c	
59-50-7	p-Chloro-m-cresol; 4-Chloro-3-methylphenol							1.00E-01	A			1400	n	
106-44-5	p-Cresol; 4-methyphenol							2.00E-02	P	6.00E-01	C	370	n	
106-46-7	p-Dichlorobenzene; 1,4-Dichlorobenzene	V		5.40E-03	C	1.10E-05	C	7.00E-02	A	8.00E-01	I	0.48	c	75
60-11-7	p-(Dimethylamino)azobenzene			4.60E+00	C	1.30E-03	C					0.005	c	
608-93-5	Pentachlorobenzene	V						8.00E-04	I			3.2	n	
82-68-8	Pentachloronitrobenzene	V		2.60E-01				3.00E-03	I			0.12	c	
87-86-5	Pentachlorophenol			4.00E-01	C	5.10E-06	C	5.00E-03	I			0.041	c	1
62-44-2	Phenacetin			2.20E-03	C	6.30E-07	C					34	c	
85-01-8	Phenanthrene	V												
108-95-2	Phenol							3.00E-01	I	2.00E-01	C	5800	n	
298-02-2	Phorate							2.00E-04	H			3	n	
100-01-6	p-Nitroaniline; 4-Nitroaniline			2.00E-02				4.00E-03	P	6.00E-03	P	3.8	c	
100-02-7	p-Nitrophenol; 4-Nitrophenol													
1336-36-3	Polychlorinated biphenyls; PCBS; Aroclors	V		2.00E+00	I	5.70E-04	I							0.5
106-50-3	p-Phenylenediamine							1.00E-03	X			20	n	
23950-58-5	Pronamide							7.50E-02	I			1200	n	
107-12-0	Propionitrile; Ethyl cyanide													
129-00-0	Pyrene	V						3.00E-02	I			120	n	
94-59-7	Safrole		M	2.20E-01	C	6.30E-05	C					0.096	c	
7782-49-2	Selenium (Total)							5.00E-03	I	2.00E-02	C	100	n	50
7440-22-4	Silver (Total)							5.00E-03	I			94	n	
93-72-1	Silvex; 2,4,5-TP							8.00E-03	I			110	n	50
100-42-5	Styrene	V						2.00E-01	I	1.00E+00	I	1200	n	100
18496-25-8	Sulfide													
99-35-4	sym-Trinitrobenzene							3.00E-02	I			590	n	
93-76-5	2,4,5-T; 2,4,5-Trichlorophenoxyacetic acid							1.00E-02	I			160	n	
95-94-3	1,2,4,5-Tetrachlorobenzene	V						3.00E-05	P			0.17	n	
630-20-6	1,1,1,2-Tetrachloroethane	V		2.60E-02	I	7.40E-06	I	3.00E-02	I			0.57	c	
79-34-5	1,1,2,2-Tetrachloroethane	V		2.00E-01	C	5.80E-05	C	2.00E-02	I			0.076	c	
127-18-4	Tetrachloroethylene; Tetrachloroethene; Perchloroethylene	V		2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	11	c	5
58-90-2	2,3,4,6-Tetrachlorophenol							3.00E-02	I			240	n	
7440-28-0	Thallium (Total)							1.00E-05	X			0.2	n	2

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

7440-31-5	Tin (Total)							6.00E-01	H				12000	n	
108-88-3	Toluene	V						8.00E-02	I	5.00E+00	I		1100	n	1000
8001-35-2	Toxaphene			1.10E+00	I	3.20E-04	I	9.00E-05	P				0.071	c	3
110-57-6	trans-1,4-Dichloro-2-butene	V			P	4.20E-03	P						0.0013	c	
156-60-5	trans-1,2-Dichloroethylene; trans-1,2-Dichloroethene	V						2.00E-02	I	4.00E-02	X		68	n	100
10061-02-6	trans-1,3-Dichloropropene	V													
120-82-1	1,2,4-Trichlorobenzene	V		2.90E-02				1.00E-02	I	2.00E-03	P		1.2	c	70
79-00-5	1,1,2-Trichloroethane	V		5.70E-02	I	1.60E-05	I	4.00E-03	I	2.00E-04	X		0.28	c	5
71-55-6	1,1,1-Trichloroethane; Methychloroform	V						2.00E+00	I	5.00E+00	I		8000	n	200
79-01-6	Trichloroethylene; Trichloroethene ethane	V	M	4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E-03	I		0.49	c	5
75-69-4	Trichlorofluoromethane; CFC-11	V						3.00E-01	I				5200	n	
95-95-4	2,4,5-Trichlorophenol							1.00E-01	I				1200	n	
88-06-2	2,4,6-Trichlorophenol			1.10E-02	I	3.10E-06	I	1.00E-03	P				4.1	c	
96-18-4	1,2,3-Trichloropropane	V	M	3.00E+01				4.00E-03	I	3.00E-04	I		0.00075	c	
7440-62-2	Vanadium (Total)							5.00E-03	G	1.00E-04	A		86	n	
108-05-4	Vinyl acetate	V						1.00E+00	H	2.00E-01	I		410	n	
75-01-4	Vinyl chloride; Chloroethene	V	M	7.20E-01	I	4.40E-06	I	3.00E-03	I	1.00E-01	I		0.019	c	2
1330-20-7	Xylene (Total)	V						2.00E-01	I	1.00E-01	I		190	n	10000
7440-66-6	Zinc (Total)							3.00E-01	I				6000	n	

Virginia DEQ ACL 1E-6/1 Tapwater RSL as ACL

Refer to ACL release memo and/or Virginia DEQ for additional information.

MCL, when available, supersedes ACL.

ACL Constituents are listed by common names found in 9VAC20-81-250 Table 3.1 and are widely used in government regulations, scientific publications, and commerce; synonyms exist for many chemicals. CAS numbers are provided as unique chemical identifiers.

Constituents without ACL value do not have a toxicity value or other inputs to develop an ACL at this time.

For constituents where (Total) is noted, all species in the groundwater that contains this element are included.

Bis(2-chloro-1-methylethyl) ether; 2, 2'-dichlorodiisopropyl ether; DCIP (CAS RN 108-60-1) is often called bis(2-chloroisopropyl) ether, the name Chemical Abstracts Service applies to its noncommercial isomer, propane, 2,2'-oxybis(2-chloro) (CAS RN 39638-32-9).

Chlordane includes alpha-chlordane (CAS RN 5103-71-9), beta-chlordane (CAS RN 5103-74-2), gamma-chlordane (CAS RN 5566-34-7), and constituents of chlordane (CAS RN 57-74-9 and CAS RN 12739-03-6).

The term chlordane in association with CAS RN 57-74-9 refers to a mixture of chlordane isomers, other chlorinated hydrocarbons and numerous other components. For issues related to chlordane contact Virginia DEQ Solid Waste.

Copper (CAS RN 7440-50-8) and lead (CAS RN 7439-92-1) do not have an MCL but have an "action level" based on treatment technology. For setting the ground water protection standard (GPS), these action levels are treated as MCLs.

Polychlorinated biphenyls (PCBs) (CAS RN 1336-36-3) contains congener chemicals, including constituents of aroclor 1016 (CAS RN 12674-11-2), aroclor 1221 (CAS RN 11104-28-2), aroclor 1232 (CAS RN 11141-16-5), aroclor 1242 (CAS RN 53469-21-9), aroclor 1248 (CAS RN 12672-29-6), aroclor 1254 (CAS RN 11097-69-1), and aroclor 1260 (CAS RN 11096-82-5).

Individual constituents of THMs (dibromochloromethane, CAS RN: 124-48-1; chloroform, CAS RN: 67-66-3; bromoform, CAS RN: 75-25-2; bromodichloromethane, CAS RN: 75-27-4) have a listed MCL of 80 µg/L. However, this MCL is for TOTAL THMs.

The MCL provided for individual THMs may ONLY be used as the MCL for total THMs provided the sum of detected THM concentrations plus the detection limits for nondetects is below the total THM MCL value of 80µg/L.

Toxaphene includes congener chemicals contained in technical toxaphene (CAS RN 8001-35-2), i.e., chlorinated camphene.

Xylene (Total) includes o-xylene (CAS RN 96-47-6), m-xylene (CAS RN 108-38-3), p-xylene (CAS RN 106-42-3), and unspecified xylenes (dimethylbenzenes) (CAS RN 1330-20-7).

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																											
Toxicity and Chemical-specific Information												Contaminant		Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD ₀ (mg/kg-day)	k e y	RfC ₁ (mg/m ³)	k e y	o l u t a g e n	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
2.20E-06	I	3.00E-04	O	9.00E-03	I	V			1	0.1	1.07E+05	Acephate	30560-19-1	1.9E+01	n	2.5E+02	n	1.3E+00	c**	5.6E+00	c**	2.6E+00	c**		1.3E-03	n	
		2.00E-02	I						1	0.1		Acetaldehyde	75-07-0	1.1E+01	c**	4.9E+01	c**					2.6E+00	c**		5.2E-04	c**	
		9.00E-01	I			V			1		1.14E+05	Acetochlor	34256-82-1	1.3E+03	n	1.6E+04	n					3.5E+02	n		2.8E-01	n	
				2.00E-03	X				1	0.1		Acetone	67-64-1	7.0E+04	n	1.1E+06	nms					1.8E+04	n		3.7E+00	n	
				6.00E-02	I	V			1		1.28E+05	Acetone Cyanohydrin	75-86-5	2.8E+06	nm	1.2E+07	nm	2.1E+00	n	8.8E+00	n						
3.80E+00	C	1.30E-03	C	1.00E-01	I	V			1	0.1	2.52E+03	Acetonitrile	75-05-8	8.1E+02	n	3.4E+03	n	6.3E+01	n	2.6E+02	n	1.3E+02	n		2.6E-02	n	
									1			Acetophenone	98-86-2	7.8E+03	ns	1.2E+05	nms					1.9E+03	n		5.8E-01	n	
				5.00E-04	I	2.00E-05	I	V	1		2.27E+04	Acetylaminofluorene, 2-Acrolein	53-96-3	1.4E-01	c	6.0E-01	c	2.2E-03	c	9.4E-03	c	1.6E-02	c		7.5E-05	c	
5.00E-01	I	1.00E-04	I	2.00E-03	I	6.00E-03	I	M	1	0.1		Acrolein	107-02-8	1.4E-01	n	6.0E-01	n	2.1E-02	n	8.8E-02	n	4.2E-02	n		8.4E-06	n	
				5.00E-01	I	2.00E-04	P	V	1		1.09E+05	Acrylamide	79-06-1	2.4E-01	c	4.6E+00	c	1.0E-02	c	1.2E-01	c	5.0E-02	c		1.1E-05	c	
5.40E-01	I	6.80E-05	I	9.00E-05	T	2.00E-03	I	V	1		1.13E+04	Acrylic Acid	79-10-7	2.0E+01	n	8.3E+01	n	2.1E-01	n	8.8E-01	n	4.2E-01	n		8.5E-05	n	
									1			Acrylonitrile	107-13-1	2.5E-01	c*	1.1E+00	c*	4.1E-02	c*	1.8E-01	c*	5.2E-02	c*		1.1E-05	c*	
5.60E-02	C			1.00E-02	I				1	0.1		Adiponitrile	111-69-3	8.5E+06	nm	3.6E+07	nm	6.3E+00	n	2.6E+01	n				8.7E-04	c	1.6E-03
				1.00E-03	I				1	0.1		Alachlor	15972-60-8	9.7E+00	c*	4.1E+01	c					2.0E+01	c	2.0E+00	8.7E-04	c	7.5E-04
				1.00E-03	I				1	0.1		Aldicarb	116-06-3	6.3E+01	n	8.2E+02	n					2.0E+01	n	2.0E+00	4.4E-03	n	4.4E-04
									1	0.1		Aldicarb Sulfone	1646-88-4	6.3E+01	n	8.2E+02	n					2.0E+01	n	2.0E+00	4.4E-03	n	4.4E-04
1.70E+01	I	4.90E-03	I	3.00E-05	I	V			1			Aldicarb sulfoxide	1646-87-3														
				4.00E-03	P	1.00E-04	X	V	1		1.11E+05	Aldrin	309-00-2	3.9E-02	c*	1.8E-01	c	5.7E-04	c	2.5E-03	c	9.2E-04	c		1.5E-04	c	
2.10E-02	C	6.00E-06	C	1.00E+00	P	5.00E-03	P		1		1.42E+03	Allyl Alcohol	107-18-6	3.5E+00	n	1.5E+01	n	1.0E-01	n	4.4E-01	n	2.1E-01	n		4.2E-05	n	
				1.00E+00	P	5.00E-03	P		1			Allyl Chloride	107-05-1	7.2E-01	c**	3.2E+00	c**	4.7E-01	c**	2.0E+00	c**	7.3E-01	c**		2.3E-04	c**	
				4.00E-04	I				1			Aluminum	7429-90-5	7.7E+04	n	1.1E+06	nm	5.2E+00	n	2.2E+01	n	2.0E+04	n		3.0E+04	n	
2.10E+01	C	6.00E-03	C	9.00E-03	I				1	0.1		Aluminum Phosphide	20859-73-8	3.1E+01	n	4.7E+02	n					8.0E+00	n				
									1	0.1		Ametryn	834-12-8	5.7E+02	n	7.4E+03	n					1.5E+02	n		1.6E-01	n	
				8.00E-02	P				1	0.1		Aminobiphenyl, 4-	92-67-1	2.6E-02	c	1.1E-01	c	4.7E-04	c	2.0E-03	c	3.0E-03	c		1.5E-05	c	
				4.00E-03	X				1	0.1		Aminophenol, m-	591-27-5	5.1E+03	n	6.6E+04	n					1.6E+03	n		6.1E-01	n	
				2.00E-02	P				1	0.1		Aminophenol, o-	95-55-6	2.5E+02	n	3.3E+03	n					7.9E+01	n		3.0E-02	n	
				2.50E-03	I				1	0.1		Aminophenol, p-	123-30-8	1.3E+03	n	1.6E+04	n					4.0E+02	n		1.5E-01	n	
						5.00E-01	I	V	1			Amiratz	33089-61-1	1.6E+02	n	2.1E+03	n					8.2E+00	n		4.2E+00	n	
				2.00E-03	X				1	0.1		Ammonia	7664-41-7					5.2E+02	n	2.2E+03	n				1.9E-01	n	
				2.00E-01	I				1			Ammonium Picrate	131-74-8	1.3E+02	n	1.6E+03	n					4.0E+01	n				
5.70E-03	I	1.60E-06	C	7.00E-03	P	1.00E-03	I		1	0.1		Ammonium Sulfamate	7773-06-0	1.6E+04	n	2.3E+05	nm					4.0E+03	n				
4.00E-02	P			2.00E-03	X				1	0.1		Amlyl Alcohol, tert-	75-85-4	8.2E+01	n	3.4E+02	n	3.1E+00	n	1.3E+01	n	6.3E+00	n		1.3E-03	n	
				4.00E-04	I				1	0.1		Aniline	62-53-3	9.5E+01	c**	4.0E+02	c*	1.0E+00	n	4.4E+00	n	1.3E+01	c*		4.6E-03	c*	
				4.00E-04	I	3.00E-04	A		0.15			Anthraquinone, 9,10-	84-65-1	1.4E+01	c**	5.7E+01	c*					1.4E+00	c*		1.4E-02	c*	
				5.00E-04	H				0.15			Antimony (metallic)	7440-36-0	3.1E+01	n	4.7E+02	n	3.1E-01	n	1.3E+00	n	7.8E+00	n	6.0E+00	3.5E-01	n	2.7E-01
				4.00E-04	H				0.15			Antimony Pentoxide	1314-60-9	3.9E+01	n	5.8E+02	n					9.7E+00	n				
						2.00E-04	I		0.15			Antimony Tetroxide	1332-81-6	3.1E+01	n	4.7E+02	n					7.8E+00	n				
1.50E+00	I	4.30E-03	I	3.00E-04	I	1.50E-05	C		1	0.03		Antimony Trioxide	1309-64-4	2.8E+05	nm	1.2E+06	nm	2.1E-01	n	8.8E-01	n						
				3.50E-06	C	5.00E-05	I		1			Arsenic, Inorganic	7440-38-2	6.8E-01	c*G	3.0E+00	cG	6.5E-04	c*	2.9E-03	c*	5.2E-02	c	1.0E+01	1.5E-03	c	2.9E-01
				3.60E-01	O				1			Arsine	7784-42-1	2.7E-01	n	4.1E+00	n	5.2E-02	n	2.2E-01	n	7.0E-02	n	7.0E+06(G)			
2.30E-01	C			3.00E-03	A				1	0.1		Asbestos (units in fibers)	1332-21-4											3.0E+00	2.0E-04	c	1.9E-03
8.80E-01	C	2.50E-04	C	4.00E-04	I				1	0.1		Asulam	3337-71-1	2.3E+04	n	3.0E+05	nm					7.2E+03	n		7.1E-04	c	
									1	0.1		Atrazine	1912-24-9	2.4E+00	c*	1.0E+01	c	1.1E-02	c	4.9E-02	c	3.0E-01	c		1.4E+01	n	
									1	0.1		Auramine	492-80-8	6.2E-01	c	2.6E+00	c					7.8E-02	c				
									1	0.1		Avermectin B1	65195-55-3	2.5E+01	n	3.3E+02	n					8.0E+00	n				
1.10E-01	I	3.10E-05	I	3.00E-03	A	1.00E-02	A	V	1	0.1		Azinphos-methyl	86-50-0	1.9E+02	n	2.5E+03	n	1.0E+01	n	4.4E+01	n	5.6E+01	n		1.7E-02	n	
				1.00E+00	P	7.00E-06	P		1	0.1		Azobenzene	103-33-3	5.6E+00	c	2.6E+01	c	9.1E-02	c	4.0E-01	c	1.2E-01	c		9.3E-04	c	
	</																										

Toxicity and Chemical-specific Information																				Contaminant		Screening Levels										Protection of Groundwater SSLs	
SFO (mg/kg-day) ¹	key	IUR (ug/m ³) ¹	key	RfD ₀ (mg/kg-day)	key	RfC ₁ (mg/m ³)	key	vol	mutagen	GIABS	ABS ₀	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)					
				8.00E-03	I	6.00E-02	I	V				6.79E+02	Bromobenzene	108-86-1	2.9E+02	n	1.8E+03	ns	6.3E+01	n	2.6E+02	n	6.2E+01	n		4.2E-02	n						
						4.00E-02	X	V				4.04E+03	Bromochloromethane	74-97-5	1.5E+02	n	6.3E+02	n	4.2E+01	n	1.8E+02	n	8.3E+01	n		2.1E-02	n						
6.20E-02	I	3.70E-05	C	8.00E-03	P			V				9.32E+02	Bromodichloromethane	75-27-4	2.9E-01	c	1.3E+00	c	7.6E-02	c	3.3E-01	c	1.3E-01	c	8.0E+01(G)	3.6E-05	c	2.2E-02					
7.90E-03	I	1.10E-06	I	2.00E-02	I			V				9.15E+02	Bromoform	75-25-2	1.9E+01	c*	8.6E+01	c	2.6E+00	c	1.1E+01	c	3.3E+00	c	8.0E+01(G)	8.7E-04	c	2.1E-02					
				1.40E-03	I	5.00E-03	I	V				3.59E+03	Bromomethane	74-83-9	6.8E+00	n	3.0E+01	n	5.2E+00	n	2.2E+01	n	7.5E+00	n		1.9E-03	n						
				5.00E-03	H			V					Bromophos	2104-96-3	3.9E+02	n	5.8E+03	n					3.5E+01	n		1.5E-01	n						
		3.70E-06	C			1.00E-01	A	V				9.66E+02	Bromopropane, 1-	106-94-5	1.6E+00	c	7.1E+00	c	7.6E-01	c	3.3E+00	c	1.5E+00	c		4.6E-04	c						
1.03E-01	O			1.50E-02	O						0.1		Bromoxynil	1689-84-5	5.3E+00	c	2.2E+01	c					6.1E-01	c		5.2E-04	c						
1.03E-01	O			1.50E-02	A			V					Bromoxynil Octanoate	1689-99-2	6.7E+00	c	3.2E+01	c					2.4E-01	c		2.1E-03	c						
6.00E-01	C	3.00E-05	I			2.00E-03	I	V				6.67E+02	Butadiene, 1,3-	106-99-0	7.6E-02	c*	3.3E-01	c*	9.4E-02	c*	4.1E-01	c*	7.1E-02	c*		3.9E-05	c*						
				1.00E-01	I			V				7.64E+03	Butanol, N-	71-36-3	7.8E+03	ns	1.2E+05	nms					2.0E+03	n		4.1E-01	n						
5.00E-04	I			4.00E-01	I	5.00E+00	I	V					Butyl Alcohol, t-	75-65-0	1.4E+03	c*	6.5E+03	c*	5.2E+03	n	2.2E+04	n	1.5E+02	c*		3.2E-02	c*						
				2.00E+00	P	3.00E+01	P	V				2.13E+04	Butyl alcohol, sec-	78-92-2	1.3E+05	nms	1.5E+06	nms	3.1E+04	n	1.3E+05	n	2.4E+04	n		5.0E+00	n						
				5.00E-02	I			V					Butylate	2008-41-5	3.9E+03	n	5.8E+04	n					4.6E+02	n		4.5E-01	n						
											0.1		Butylated hydroxyanisole	25013-16-5	2.7E+03	c	1.1E+04	c	4.9E+01	c	2.2E+02	c	1.5E+02	c		2.9E-01	c						
				3.00E-01	P						0.1		Butylated hydroxytoluene	128-37-0	1.5E+02	c	6.4E+02	c					3.4E+00	c		1.0E-01	c						
				5.00E-02	P			V				1.08E+02	Butylbenzene, n-	104-51-8	3.9E+03	ns	5.8E+04	ns					1.0E+03	n		3.2E+00	n						
				1.00E-01	X			V				1.45E+02	Butylbenzene, sec-	135-98-8	7.8E+03	ns	1.2E+05	nms					2.0E+03	n		5.9E+00	n						
				1.00E-01	X			V				1.83E+02	Butylbenzene, tert-	98-06-6	7.8E+03	ns	1.2E+05	nms					6.9E+02	n		1.6E+00	n						
				2.00E-02	A						0.1		Cacodylic Acid	75-60-5	1.3E+03	n	1.6E+04	n					4.0E+02	n		1.1E-01	n						
		1.80E-03	I	1.00E-04	A	1.00E-05	A			0.025	0.001		Cadmium (Diet)	7440-43-9	7.1E+00	n	1.0E+02	n	1.6E-03	c**	6.8E-03	c**	1.8E+00	n	5.0E+00	1.4E-01	n	3.8E-01					
		1.80E-03	I	1.00E-04	A	1.00E-05	A			0.05	0.001		Cadmium (Water)	7440-43-9					1.6E-03	c**	6.8E-03	c**											
				5.00E-01	I	2.20E-03	C				0.1		Caprolactam	105-60-2	3.1E+04	n	4.0E+05	nm	2.3E+00	n	9.6E+00	n	9.9E+03	n		2.5E+00	n						
				2.00E-03	I						0.1		Captafol	2425-06-1	3.6E+00	c*	1.5E+01	c	6.5E-02	c	2.9E-01	c	4.0E-01	c*		7.1E-04	c*						
2.30E-03	C	6.60E-07	C	1.30E-01	I						0.1		Caplan	133-06-2	2.4E+02	c*	1.0E+03	c	4.3E+00	c	1.9E+01	c	3.1E+01	c*		2.2E-02	c*						
				1.00E-01	I						0.1		Carbaryl	63-25-2	6.3E+03	n	8.2E+04	n					1.8E+03	n		1.7E+00	n						
				5.00E-03	I						0.1		Carbofuran	1563-66-2	3.2E+02	n	4.1E+03	n					9.4E+01	n	4.0E+01	3.7E-02	n	1.6E-02					
				1.00E-01	I	7.00E-01	I	V				7.38E+02	Carbon Disulfide	75-15-0	7.7E+02	ns	3.5E+03	ns	7.3E+02	n	3.1E+03	n	8.1E+02	n		2.4E-01	n						
7.00E-02	I	6.00E-06	I	4.00E-03	I	1.00E-01	I	V				4.58E+02	Carbon Tetrachloride	56-23-5	6.5E-01	c	2.9E+00	c	4.7E-01	c	2.0E+00	c	4.6E-01	c	5.0E+00	1.8E-04	c	1.9E-03					
						1.00E-01	P	V				5.89E+03	Carbonyl Sulfide	463-58-1	6.7E+01	n	2.8E+02	n	1.0E+02	n	4.4E+02	n	2.1E+02	n		5.1E-01	n						
				1.00E-02	I						0.1		Carbosulfan	55285-14-8	6.3E+02	n	8.2E+03	n					5.1E+01	n		1.2E+00	n						
				1.00E-01	I	9.00E-04	I				0.1		Carboxin	5234-68-4	6.3E+03	n	8.2E+04	n					1.9E+03	n		1.0E+00	n						
													Ceric oxide	1306-38-3	1.3E+06	nm	5.4E+06	nm	9.4E-01	n	3.9E+00	n				4.0E-01	n						
				1.00E-01	I			V					Chloral Hydrate	302-17-0	7.8E+03	n	1.2E+05	nm					2.0E+03	n		4.0E-01	n						
				1.50E-02	I						0.1		Chloramben	133-90-4	9.5E+02	n	1.2E+04	n					2.9E+02	n		7.0E-02	n						
4.03E-01	H										0.1		Chloramines, Organic	E701235											4.0E+03(G)								
											0.1		Chloranil	118-75-2	1.3E+00	c	5.7E+00	c					1.8E-01	c		1.5E-04	c						
				5.00E-04	G			V			0.04		Chlordane (alpha)	5103-71-9	3.6E+01	n	5.0E+02	n					3.6E+00	n		4.9E-01	n						
				5.00E-04	G			V			0.04		Chlordane (gamma)	5103-74-2	3.6E+01	n	5.0E+02	n					1.0E+01	n		1.4E+00	n						
3.50E-01	I	1.00E-04	I	5.00E-04	I	7.00E-04	I	V			0.04		Chlordane (technical mixture)	12789-03-6	1.7E+00	c*	7.7E+00	c*	2.8E-02	c*	1.2E-01	c*	2.0E-02	c*	2.0E+00	2.7E-03	c*	2.7E-01					
1.00E+01	I	4.60E-03	C	3.00E-04	I						0.1		Chlordecone (Kepone)	143-50-0	5.4E-02	c	2.3E-01	c	6.1E-04	c	2.7E-03	c	3.5E-03	c		1.2E-04	c						
				7.00E-04	A						0.1		Chlorfenvinphos	470-90-6	4.4E+01	n	5.7E+02	n					1.1E+01	n		3.1E-02	n						
				9.00E-02	O						0.1		Chlorimuron, Ethyl-	90982-32-4	5.7E+03	n	7.4E+04	n					1.8E+03	n		6.0E-01	n						
				1.00E-01	I	1.45E-04	A	V				2.78E+03	Chlorine	7782-50-5	1.8E-01	n	7.8E-01	n	1.5E-01	n	6.4E-01	n	3.0E-01	n	4.0E+03(G)	1.5E-04	n	2.0E+00					
				3.00E-02	I	2.00E-04	I	V					Chlorine Dioxide	10049-04-4	2.3E+03	n	3.4E+04	n	2.1E-01	n	8.8E-01	n	4.2E-01	n	8.0E+02(G)								
				3.00E-02	I								Chlorite (Sodium Salt)	7758-19-2	2.3E+03	n	3.5E+04	n					6.0E+02	n		1.0E+03							
				5.00E+01	I			V				1.15E+03	Chloro-1,1-difluoroethane, 1-	75-68-3	5.4E+04</																		

Toxicity and Chemical-specific Information																	Contaminant		Screening Levels										Protection of Groundwater SSLs		
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD _o (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)			
5.00E-01	C	8.40E-02	G	3.00E-03	I	1.00E-04	I		M	0.025			Chromium(III), Insoluble Salts	16065-83-1	1.2E+05	nm	1.8E+06	nm					2.2E+04	n		4.0E+07	n				
				3.00E-03	I					0.013			Chromium(VI)	18540-29-9	3.0E-01	c	6.3E+00	c	1.2E-05	c	1.5E-04	c	3.5E-02	c		6.7E-04	c				
										0.013			Chromium, Total	7440-47-3											1.0E+02			1.8E+05			
		9.00E-03	P	1.30E-02	I	6.00E-06	P				1	0.1	Clofentazine	74115-24-5	8.2E+02	n	1.1E+04	n	3.1E-04	c*	1.4E-03	c*	2.3E+02	n		1.4E+01	n				
		6.20E-04	I	3.00E-04	P			V	M		1		Cobalt	7440-48-4	2.3E+01	n	3.5E+02	n					6.0E+00	n		2.7E-01	n				
				4.00E-02	H						1		Coke Oven Emissions	E649830					1.6E-03	c	2.0E-02	c									
				5.00E-02	I	6.00E-01	C				1	0.1	Copper	7440-50-8	3.1E+03	n	4.7E+04	n					8.0E+02	n	1.3E+03	2.8E+01	n	4.6E+01			
				5.00E-02	I	6.00E-01	C				1	0.1	Cresol, m-	108-39-4	3.2E+03	n	4.1E+04	n	6.3E+02	n	2.6E+03	n	9.3E+02	n		7.4E-01	n				
				2.00E-02	P	6.00E-01	C				1	0.1	Cresol, o-	95-48-7	3.2E+03	n	4.1E+04	n	6.3E+02	n	2.6E+03	n	9.3E+02	n		7.5E-01	n				
				1.00E-01	A						1	0.1	Cresol, p-	106-44-5	1.3E+03	n	1.6E+04	n	6.3E+02	n	2.6E+03	n	3.7E+02	n		3.0E-01	n				
				1.00E-01	A						1	0.1	Cresol, p-chloro-m-	59-50-7	6.3E+03	n	8.2E+04	n					1.4E+03	n		1.7E+00	n				
1.90E+00	H			1.00E-01	A	6.00E-01	C				1	0.1	Cresols	1319-77-3	6.3E+03	n	8.2E+04	n	6.3E+02	n	2.6E+03	n	1.5E+03	n		1.3E+00	n				
				1.00E-03	P			V			1		Crtonaldehyde, trans-	123-73-9	3.7E-01	c	1.7E+00	c					4.0E-02	c		8.2E-06	c				
				1.00E-01	I	4.00E-01	I	V			1		Cumene	98-82-8	1.9E+03	ns	9.9E+03	ns	4.2E+02	n	1.8E+03	n	4.5E+02	n		7.4E-01	n				
2.20E-01	C	6.30E-05	C								1	0.1	Cupferron	135-20-6	2.5E+00	c	1.0E+01	c	4.5E-02	c	1.9E-01	c	3.5E-01	c		6.1E-04	c				
8.40E-01	H			2.00E-03	H						1	0.1	Cyanazine	21725-46-2	6.5E-01	c	2.7E+00	c					8.8E-02	c		4.1E-05	c				
													Cyanides																		
				1.00E-03	I	9.00E-03	C				1		~Calcium Cyanide	592-01-8	7.8E+01	n	1.2E+03	n	9.4E+00	n	3.9E+01	n	2.0E+01	n							
				5.00E-03	I						1		~Copper Cyanide	544-92-3	3.9E+02	n	5.8E+03	n					1.0E+02	n							
				6.00E-04	I	8.00E-04	G	V			1		~Cyanide (CN-)	57-12-5	2.3E+01	n	1.5E+02	n	8.3E-01	n	3.5E+00	n	1.5E+00	n	2.0E+02	1.5E-02	n	2.0E+00			
				1.00E-03	I			V			1		~Cyanogen	460-19-5	7.8E+01	n	1.2E+03	n					2.0E+01	n							
				9.00E-02	I			V			1		~Cyanogen Bromide	506-68-3	7.0E+03	n	1.1E+05	nm					1.8E+03	n							
				5.00E-02	I			V			1		~Cyanogen Chloride	506-77-4	3.9E+03	n	5.8E+04	n					1.0E+03	n							
				6.00E-04	I	8.00E-04	I	V			1	1.00E+07	~Hydrogen Cyanide	74-90-8	2.3E+01	n	1.5E+02	n	8.3E-01	n	3.5E+00	n	1.5E+00	n		1.5E-02	n				
				2.00E-03	I	9.00E-03	C				1		~Potassium Cyanide	151-50-8	1.6E+02	n	2.3E+03	n	9.4E+00	n	3.9E+01	n	4.0E+01	n							
				5.00E-03	I						0.04		~Potassium Silver Cyanide	506-61-6	3.9E+02	n	5.8E+03	n					8.2E+01	n							
				1.00E-01	I						0.04		~Silver Cyanide	506-64-9	7.8E+03	n	1.2E+05	nm					1.8E+03	n							
				1.00E-03	I	9.00E-03	C				1		~Sodium Cyanide	143-33-9	7.8E+01	n	1.2E+03	n	9.4E+00	n	3.9E+01	n	2.0E+01	n	2.0E+02						
				2.00E-04	P						1		~Thiocyanates	E1790665	1.6E+01	n	2.3E+02	n					4.0E+00	n							
				2.00E-04	X			V			1		~Thiocyanic Acid	463-56-9	1.6E+01	n	2.3E+02	n					4.0E+00	n							
				5.00E-02	I						1		~Zinc Cyanide	557-21-1	3.9E+03	n	5.8E+04	n					1.0E+03	n							
						6.00E+00	I	V			1	1.17E+02	Cyclohexane	110-82-7	6.5E+03	ns	2.7E+04	ns	6.3E+03	n	2.6E+04	n	1.3E+04	n		1.3E+01	n				
2.00E-02	X			2.00E-02	X						1	0.1	Cyclohexane, 1,2,3,4,5-pentabromo-6-chloro-	87-84-3	2.7E+01	c*	1.1E+02	c					2.8E+00	c		1.6E-02	c				
				5.00E+00	I	7.00E-01	P	V			1	5.11E+03	Cyclohexanone	108-94-1	2.8E+04	ns	1.3E+05	nms	7.3E+02	n	3.1E+03	n	1.4E+03	n		3.4E-01	n				
				5.00E-03	P	1.00E+00	X	V			1	2.83E+02	Cyclohexene	110-83-8	3.1E+02	ns	3.1E+03	ns	1.0E+03	n	4.4E+03	n	7.0E+01	n		4.6E-02	n				
				2.00E-01	I			V			1	2.93E+05	Cyclohexylamine	108-91-8	1.6E+04	n	2.3E+05	nm					3.8E+03	n		1.0E+00	n				
				2.50E-02	I						1	0.1	Cyfluthrin	68359-37-5	1.6E+03	n	2.1E+04	n					1.2E+02	n		3.1E+01	n				
				5.00E-01	O						1	0.1	Cyromazine	66215-27-8	3.2E+04	n	4.1E+05	nm					9.9E+03	n		2.5E+00	n				
1.80E-02	C	5.10E-06	C	3.00E-02	I						1	0.1	Dalapon	75-99-0	1.9E+03	n	2.5E+04	n					6.0E+02	n	2.0E+02	1.2E-01	n	4.1E-02			
7.00E-04	I			1.50E-01	I						1	0.1	Daminozide	1596-84-5	3.0E+01	c	1.3E+02	c	5.5E-01	c	2.4E+00	c	4.3E+00	c		9.5E-04	c				
				7.00E-03	I						1	0.1	Decabromodiphenyl ether, 2,2',3,3',4,4',5,5',6,6'- (BDE-209)	1163-19-5	4.4E+02	n	3.3E+03	c**					1.1E+02	c**		6.2E+01	c**				
1.20E-03	I			4.00E-05	I						1	0.1	Demeton	8065-48-3	2.5E+00	n	3.3E+01	n					4.2E-01	n							
6.10E-02	H			6.00E-01	I						1	0.1	Di(2-ethylhexyl)adipate	103-23-1	4.5E+02	c*	1.9E+03	c					6.5E+01	c	4.0E+02	4.7E+00	c	2.9E+01			
											1	0.1	Diallate	2303-16-4	8.9E+00	c	3.8E+01	c					5.4E-01	c		8.0E-04	c				
				7.00E-04	A						1	0.1	Diazinon	333-41-5	4.4E+01	n	5.7E+02	n					1.0E+01	n		6.5E-02	n				
8.00E-01	P	6.00E-03	P	2.00E-04	P	2.00E-04	I	V	M		1	9.79E+02	Dibromo-3-chloropropane, 1,2-	98-12-8	5.3E-03	c	6.4E-02	c	1.7E-04	c	2.0E-03	c	3.3E-04	c	2.0E-01	1.4E-07	c	8.6E-05			
2.50E-01	C			3.00E-04	C						1	0.1	Dibromoacetic acid	631-64-1	2.2E+00	c**	9.2E+00	c*					3.1E-01	c*	6.0E+01(G)	6.3E-05	c*	1.2E-02			
				4.00E-04	X			V			1	1.59E+02	Dibromobenzene, 1,3-	108-36-1	3.1E+01	n	4.7E+02														

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																													
Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs				
SFO (mg/kg-day) ¹	k y	IUR (ug/m ³) ¹	k y	RfD ₀ (mg/kg-day)	k y	RfC ₁ (mg/m ³)	k y	v o l	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
1.60E+01	I	4.60E-03	I	8.00E-02	P	3.00E-04	X	V		1		2.56E+02	Dicyclopentadiene	77-73-6	1.3E+00	n	5.4E+00	n	3.1E-01	n	1.3E+00	n	6.3E-01	n		2.2E-03	n		
				5.00E-05	I											60-57-1	3.4E-02	c*	1.4E-01	c	6.1E-04	c	2.7E-03	c	1.8E-03	c		7.1E-05	c
						5.00E-03	I									E17136615				9.4E-03	c	4.1E-02	c						
				2.00E-03	P	2.00E-04	P			1	0.1		Diethanolamine	111-42-2	1.3E+02	n	1.6E+03	n	2.1E-01	n	8.8E-01	n	4.0E+01	n		8.1E-03	n		
				3.00E-02	P	1.00E-04	P									112-34-5	1.9E+03	n	2.4E+04	n	1.0E-01	n	4.4E-01	n	6.0E+02	n		1.3E-01	n
				6.00E-02	P	3.00E-04	P									111-90-0	3.8E+03	n	4.8E+04	n	3.1E-01	n	1.3E+00	n	1.2E+03	n		2.4E-01	n
3.50E+02	C	1.00E-01	C	1.00E-03	P			V		1		1.12E+05	Diethylformamide	617-84-5	7.8E+01	n	1.2E+03	n					2.0E+01	n		4.1E-03	n		
																56-53-1	1.6E-03	c	6.6E-03	c	2.8E-05	c	1.2E-04	c	5.1E-05	c		2.8E-05	c
				8.30E-02	O											43222-48-6	5.2E+03	n	6.8E+04	n					1.7E+03	n		2.6E+02	n
				2.00E-02	I					1	0.1		Diffubenzuron	35367-38-5	1.3E+03	n	1.6E+04	n					2.9E+02	n		3.3E-01	n		
						4.00E+01	I	V								75-37-6	4.8E+04	ns	2.0E+05	nms	4.2E+04	n	1.8E+05	n	8.3E+04	n		2.8E+01	n
						3.00E+01	X	V								420-45-1	2.4E+04	ns	1.0E+05	ns	3.1E+04	n	1.3E+05	n	6.3E+04	n		1.4E+02	n
4.40E-02	C	1.30E-05	C					V		1			Dihydrosafrole	94-58-6	9.9E+00	c	4.5E+01	c	2.2E-01	c	9.4E-01	c	3.0E-01	c		1.9E-04	c		
																108-20-3	2.2E+03	n	9.4E+03	ns	7.3E+02	n	3.1E+03	n	1.5E+03	n		3.7E-01	n
				8.00E-02	I			7.00E-01	P	V					2.26E+03	Diisopropyl Ether	1445-75-6	6.3E+03	ns	9.3E+04	ns					1.6E+03	n		4.5E-01
1.60E+00	P			2.18E-02	O					1	0.1		Dimethipin	55290-64-7	1.4E+03	n	1.8E+04	n					4.4E+02	n		9.6E-02	n		
				2.20E-03	O											60-51-5	1.4E+02	n	1.8E+03	n					4.4E+01	n		9.9E-03	n
																119-90-4	3.4E-01	c	1.4E+00	c					4.7E-02	c		5.8E-05	c
1.70E-03	P			6.00E-02	P					1	0.1		Dimethyl methylphosphonate	756-79-6	3.2E+02	c*	1.4E+03	c*					4.6E+01	c*		9.6E-03	c*		
				4.60E+00	C	1.30E-03	C									60-11-7	1.2E-01	c	5.0E-01	c	2.2E-03	c	9.4E-03	c	5.0E-03	c		2.1E-05	c
				5.80E-01	H											21436-96-4	9.4E-01	c	4.0E+00	c					1.3E-01	c		1.2E-04	c
2.00E-01	P			2.00E-03	X					1	0.1		Dimethylaniline, 2,4-	95-68-1	2.7E+00	c*	1.1E+01	c					3.7E-01	c		2.1E-04	c		
				2.70E-02	P					V						121-69-7	2.6E+01	c**	1.2E+02	c*					2.5E+00	c*		9.0E-04	c*
				1.10E+01	P											119-93-7	4.9E-02	c	2.1E-01	c					6.5E-03	c		4.3E-05	c
5.50E+02	C	1.60E-01	C	1.00E-01	P	3.00E-02	I	V		1		1.06E+05	Dimethylformamide	68-12-2	2.6E+03	n	1.5E+04	n	3.1E+01	n	1.3E+02	n	6.1E+01	n		1.2E-02	n		
				1.00E-04	X	2.00E-06	X	V								57-14-7	5.7E-02	n	2.4E-01	n	2.1E-03	n	8.8E-03	n	4.2E-03	n		9.3E-07	n
															1.89E+05	Dimethylhydrazine, 1,2-	540-73-8	8.8E-04	c	4.1E-03	c	1.8E-05	c	7.7E-05	c	2.8E-05	c		6.5E-09
				2.00E-02	I					1	0.1		Dimethylphenol, 2,4-	105-67-9	1.3E+03	n	1.6E+04	n					3.6E+02	n		4.2E-01	n		
				6.00E-04	I											576-26-1	3.8E+01	n	4.9E+02	n					1.1E+01	n		1.3E-02	n
				1.00E-03	I											95-65-8	6.3E+01	n	8.2E+02	n					1.8E+01	n		2.1E-02	n
4.50E-02	C	1.30E-05	C					V		1		4.73E+02	Dimethylvinylchloride	513-37-1	1.1E+00	c	4.8E+00	c	2.2E-01	c	9.4E-01	c	3.3E-01	c		1.1E-04	c		
				8.00E-05	X											534-52-1	5.1E+00	n	6.6E+01	n					1.5E+00	n		2.6E-03	n
				2.00E-03	I											131-89-5	1.3E+02	n	1.6E+03	n					2.3E+01	n		7.7E-01	n
				4.00E-04	X	2.00E-03	X			1	0.1		Dinitroaniline, 3,5-	618-87-1	2.5E+01	n	3.3E+02	n	2.1E+00	n	8.8E+00	n	7.7E+00	n		4.1E-03	n		
				1.00E-04	P											528-29-0	6.3E+00	n	8.2E+01	n					1.9E+00	n		1.8E-03	n
				1.00E-04	I											99-65-0	6.3E+00	n	8.2E+01	n					2.0E+00	n		1.8E-03	n
				1.00E-04	P					1	0.1		Dinitrobenzene, 1,4-	100-25-4	6.3E+00	n	8.2E+01	n					2.0E+00	n		1.8E-03	n		
				2.00E-03	I											51-28-5	1.3E+02	n	1.6E+03	n					3.9E+01	n		4.4E-02	n
																E1615210	8.0E-01	c	3.4E+00	c					1.1E-01	c		1.5E-04	c
3.10E-01	C	8.90E-05	C	2.00E-03	I					1	0.102		Dinitrotoluene, 2,4-	121-14-2	1.7E+00	c*	7.4E+00	c	3.2E-02	c	1.4E-01	c	2.4E-01	c		3.2E-04	c		
				3.00E-04	X											606-20-2	3.6E-01	c*	1.5E+00	c					4.9E-02	c		6.7E-05	c
				1.00E-04	X											35572-78-2	7.7E+00	n	1.1E+02	n					1.9E+00	n		1.5E-03	n
4.50E-01	X			1.00E-04	X					1	0.009		Dinitrotoluene, 4-Amino-2,6-	19406-51-0	7.7E+00	n	1.1E+02	n					1.9E+00	n		1.5E-03	n		
				9.00E-04	X											25321-14-6	1.2E+00	c*	5.1E+00	c					1.0E-01	c		1.4E-04	c
				1.00E-03	I											Dinoseb	88-85-7	6.3E+01	n	8.2E+02	n					1.5E+01	n		1.3E-01
1.00E-01	I	5.00E-06	I	3.00E-02	I	3.00E-02	I	V		1		1.16E+05	Dioxane, 1,4-	123-91-1	5.3E+00	c	2.4E+01	c	5.6E-01	c*	2.5E+00	c*	4.6E-01	c		9.4E-05	c		
6.20E+03	I	1.30E+00	I							1	0.03		Dioxins																
1.30E+05	C	3.80E+01	C	7.00E-10	I	4.00E-08	C	V		1	0.03		~TCDD, 2,3,7,8-	1746-01-6	4.8E-06	c*	2.2E-05	c*	7.4E-08	c	3.2E-07	c	1.2E-07	c	3.0E-05	td			

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																																				
Toxicity and Chemical-specific Information													Contaminant										Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD _o (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	o l u t a g e n	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)									
				1.00E-05	I					0.1		Ethyl-p-nitrophenyl Phosphonate	2104-64-5	6.3E-01	n	8.2E+00	n					8.9E-02	n		2.8E-03	n										
1.10E-02	C	2.50E-06	C	5.00E-02	P	1.00E+00	I	V	1		4.80E+02	Ethylbenzene	100-41-4	5.8E+00	c	2.5E+01	c	1.1E+00	c	4.9E+00	c	1.5E+00	c	7.0E+02	1.7E-03	c	7.8E-01									
				7.00E-02	P				1	0.1		Ethylene Cyanohydrin	109-78-4	4.4E+03	n	5.7E+04	n					1.4E+03	n		2.8E-01	n										
				9.00E-02	P			V	1		1.89E+05	Ethylene Diamine	107-15-3	7.0E+03	n	1.1E+05	nm					1.8E+03	n		4.1E-01	n										
				8.00E-01	A	4.00E-01	C		1	0.1		Ethylene Glycol	107-21-1	5.1E+04	n	6.6E+05	nm	4.2E+02	n	1.8E+03	n	1.6E+04	n		3.2E+00	n										
3.10E-01	C	3.00E-03	I	1.00E-01	I	1.60E+00	I		1	0.1		Ethylene Glycol Monobutyl Ether	111-76-2	6.3E+03	n	8.2E+04	n	1.7E+03	n	7.0E+03	n	2.0E+03	n		4.1E-01	n										
4.50E-02	C	1.30E-05	C						1			Ethylene Oxide	75-21-8	2.0E-03	c	2.5E-02	c	3.4E-04	c	4.1E-03	c	6.7E-04	c		1.4E-07	c										
6.50E+01	C	1.90E-02	C	8.00E-05	I				1	0.1	1.54E+05	Ethylene Thiourea	96-45-7	5.1E+00	n	5.1E+01	c**	2.2E-01	c	9.4E-01	c	1.6E+00	n		3.6E-04	n										
								V	1			Ethyleneimine	151-56-4	2.7E-03	c	1.2E-02	c	1.5E-04	c	6.5E-04	c	2.4E-04	c		5.2E-08	c										
				3.00E+00	I				1	0.1		Ethylphthalyl Ethyl Glycolate	84-72-0	1.9E+05	nm	2.5E+06	nm					5.8E+04	n		1.3E+02	n										
				2.50E-04	I				1	0.1		Fenamiphos	22224-92-6	1.6E+01	n	2.1E+02	n					4.4E+00	n		4.3E-03	n										
				2.50E-02	I				1	0.1		Fenpropathrin	39515-41-8	1.6E+03	n	2.1E+04	n					6.4E+01	n		2.9E+00	n										
				2.50E-02	I				1	0.1		Fenvalerate	51630-58-1	1.6E+03	n	2.1E+04	n					5.0E+02	n		3.2E+02	n										
				1.30E-02	I				1	0.1		Fluometuron	2164-17-2	8.2E+02	n	1.1E+04	n					2.4E+02	n		1.9E-01	n										
				4.00E-02	C	1.30E-02	C		1			Fluoride	16984-48-8	3.1E+03	n	4.7E+04	n	1.4E+01	n	5.7E+01	n	8.0E+02	n	4.0E+03	1.2E+02	n	6.0E+02									
				6.00E-02	I	1.30E-02	C		1			Fluorine (Soluble Fluoride)	7782-41-4	4.7E+03	n	7.0E+04	n	1.4E+01	n	5.7E+01	n	1.2E+03	n	4.0E+03	1.8E+02	n	6.0E+02									
				8.00E-02	I				1	0.1		Fluridone	59756-60-4	5.1E+03	n	6.6E+04	n					1.4E+03	n		1.6E+02	n										
				4.00E-02	O				1	0.1		Flurprimidol	56425-91-3	2.5E+03	n	3.3E+04	n					6.9E+02	n		3.1E+00	n										
				2.00E-03	O				1	0.1		Flusilazole	85509-19-9	1.3E+02	n	1.6E+03	n					3.1E+01	n		5.1E+00	n										
				5.00E-01	O				1	0.1		Flutolanil	66332-96-5	3.2E+04	n	4.1E+05	nm					7.9E+03	n		4.2E+01	n										
				1.00E-02	I				1	0.1		Fluvalinate	69409-94-5	6.3E+02	n	8.2E+03	n					2.0E+02	n		2.9E+02	n										
				9.00E-02	O				1	0.1		Folpet	133-07-3	5.7E+03	n	7.4E+04	n					1.6E+03	n		3.9E-01	n										
				1.00E-02	O				1	0.1		Fomesafen	72178-02-0	6.3E+02	n	8.2E+03	n					1.9E+02	n		6.3E-01	n										
2.10E-02	C	1.30E-05	I	2.00E-03	I	9.82E-03	A	V	1	0.1	4.24E+04	Fonofos	944-22-9	1.3E+02	n	1.6E+03	n					2.4E+01	n		4.7E-02	n										
				2.00E-01	I				1			Formaldehyde	50-00-0	1.1E+01	c*	5.0E+01	c*	2.2E-01	c*	9.4E-01	c*	3.9E-01	c*		7.8E-05	c*										
				9.00E-01	P	3.00E-04	X	V	1		1.06E+05	Formic Acid	64-18-6	2.9E+01	n	1.2E+02	n	3.1E-01	n	1.3E+00	n	6.3E-01	n		1.3E-04	n										
				2.50E+00	O				1	0.1		Fosetyl-AL	39148-24-8	1.6E+05	nm	2.1E+06	nm					5.0E+04	n		6.6E+02	n										
				1.00E-03	X			V	1			~Dibenzofuran	132-64-9	7.8E+01	n	1.2E+03	n					7.9E+00	n		1.5E-01	n										
				1.00E-03	I			V	1		6.22E+03	~Furan	110-00-9	7.8E+01	n	1.2E+03	n					1.9E+01	n		7.3E-03	n										
				9.00E-01	I	2.00E+00	I	V	1		1.65E+05	~Tetrahydrofuran	109-99-9	1.8E+04	n	9.5E+04	n	2.1E+03	n	8.8E+03	n	3.4E+03	n		7.5E-01	n										
3.80E+00	H			3.00E-03	I	5.00E-02	H	V	1	0.1	1.01E+04	Furazolidone	67-45-8	1.4E-01	c	6.0E-01	c					2.0E-02	c		3.9E-05	c										
1.50E+00	C	4.30E-04	C						1	0.1		Furfural	98-01-1	2.1E+02	n	2.6E+03	n	5.2E+01	n	2.2E+02	n	3.8E+01	n		8.1E-03	n										
3.00E-02	I	8.60E-06	C						1	0.1		Furium	531-82-8	3.6E-01	c	1.5E+00	c	6.5E-03	c	2.9E-02	c	5.1E-02	c		6.8E-05	c										
				6.00E-03	O				1	0.1		Furmecycloz	60568-05-0	1.8E+01	c	7.7E+01	c	3.3E-01	c	1.4E+00	c	1.1E+00	c		1.2E-03	c										
				1.00E-01	A	8.00E-05	C		1	0.1		Glufosinate, Ammonium	77182-82-2	3.8E+02	n	4.9E+03	n					1.2E+02	n		2.6E-02	n										
				4.00E-04	I	1.00E-03	X	V	1	0.1	1.06E+05	Glutaraldehyde	111-30-8	6.0E+03	n	7.0E+04	n	8.3E-02	n	3.5E-01	n	2.0E+03	n		4.0E-01	n										
				1.00E-01	X			V	1	0.1		Glycidaldehyde	765-34-4	2.3E+01	n	2.1E+02	n	1.0E+00	n	4.4E+00	n	1.7E+00	n		3.3E-04	n										
				1.00E-02	X				1			Glyphosate	1071-83-6	6.3E+03	n	8.2E+04	n					2.0E+03	n	7.0E+02	8.8E+00	n	3.1E+00									
				2.00E-02	P				1	0.1		Guanidine	113-00-8	7.8E+02	n	1.2E+04	n					2.0E+02	n		4.5E-02	n										
				3.00E-02	X				1	0.1		Guanidine Chloride	50-01-1	1.3E+03	n	1.6E+04	n					4.0E+02	n		1.5E-01	n										
				5.00E-05	I				1	0.1		Guanidine Nitrate	506-93-4	1.9E+03	n	2.5E+04	n					6.0E+02	n		8.4E-03	n										
4.50E+00	I	1.30E-03	I	1.00E-04	A			V	1		2.09E+02	Haloxyp, Methyl	69806-40-2	3.2E+00	n	4.1E+01	n					7.6E-01	n		2.0E-01	2.8E-05	c*	4.1E-03								
9.10E+00	I	2.60E-03	I	1.30E-05	I			V	1			Heptachlor	76-44-8	1.3E-01	c*	6.3E-01	c	2.2E-03	c	9.4E-03	c	1.4E-03	c	4.0E-01	1.2E-04	c	3.3E-02									
				3.00E-04	X	4.00E-01	P	V	1		5.79E+01	Heptachlor Epoxide	1024-57-3	7.0E-02	c*	3.3E-01	c*	1.1E-03	c	4.7E-03	c	1.4E-03	c*	2.0E-01	2.8E-05	c*	4.1E-03									
				2.00E-03	I				1	0.1		Heptane, N-	111-71-7	2.4E+01	n	1.0E+02	n	3.1E+00	n	1.3E+01	n	6.3E+00	n		1.4E-03	n										
				2.00E-04	I				1	0.1		Hexabromobenzene	87-82-1	1.6E+02	n	2.3E+03	n					4.0E+01	n		4.8E-02	n										
				2.00E-04	I				1	0.1		Hexabromodiphenyl ether, 2,																								

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																														
Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs					
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD _o (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)		
9.50E-04	I			1.00E-02	A					1			Iodine	7553-56-2	7.8E+02	n	1.2E+04	n					2.0E+02	n		1.2E+01	n			
				4.00E-02	I					1	0.1		Iprodione	36734-19-7	2.5E+03	n	3.3E+04	n					7.4E+02	n		2.2E-01	n			
				7.00E-01	P					1			Iron	7439-89-6	5.5E+04	n	8.2E+05	nm					1.4E+04	n		3.5E+02	n			
				3.00E-01	I	4.00E-01	X	V		1		1.00E+04	Isobutyl Alcohol	78-83-1	7.8E+03	n	4.3E+04	ns	4.2E+02	n	1.8E+03	n	7.3E+02	n		1.5E-01	n			
				2.00E-01	I	2.00E+00	C		1	0.1			Isophorone	78-59-1	5.7E+02	c*	2.4E+03	c*	2.1E+03	n	8.8E+03	n	7.8E+01	c*		2.6E-02	c*			
				1.50E-02	I			V		1			Isopropalin	33820-53-0	1.2E+03	n	1.8E+04	n					4.0E+01	n		9.2E-01	n			
				2.00E+00	P	2.00E-01	P	V		1		1.09E+05	Isopropanol	67-63-0	5.6E+03	n	2.4E+04	n	2.1E+02	n	8.8E+02	n	4.1E+02	n		8.4E-02	n			
				1.00E-01	I				1	0.1			Isopropyl Methyl Phosphonic Acid	1832-54-8	6.3E+03	n	8.2E+04	n					2.0E+03	n		4.3E-01	n			
				5.00E-02	I				1	0.1			Isosaben	82558-50-7	3.2E+03	n	4.1E+04	n					7.3E+02	n		2.0E+00	n			
				8.00E-03	O	3.00E-01	A	V		1		0.1		Jet propulsion fuel 7 (JP-7)	E1737665	4.3E+08	nm	1.8E+09	nm	3.1E+02	n	1.3E+03	n	6.3E+02	n		4.6E+00	n		
				2.00E-04	X					1	0.1		Lactonitrile	78-97-7	1.3E+01	n	1.6E+02	n					4.0E+00	n		8.1E-04	n			
				5.00E-05	P				1			Lanthanum	7439-91-0	3.9E+00	n	5.8E+01	n					1.0E+00	n							
				2.08E-05	P				1	0.1			Lanthanum Acetate Hydrate	100587-90-4	1.3E+00	n	1.7E+01	n					4.2E-01	n						
				1.87E-05	P				1				Lanthanum Chloride Heptahydrate	10025-84-0	1.5E+00	n	2.2E+01	n					3.7E-01	n						
				2.83E-05	P				1				Lanthanum Chloride, Anhydrous	10099-58-8	2.2E+00	n	3.3E+01	n					5.7E-01	n						
				1.60E-05	P				1				Lanthanum Nitrate Hexahydrate	10277-43-7	1.3E+00	n	1.9E+01	n					3.2E-01	n						
				8.50E-03	C	1.20E-05	C				1			Lead Compounds	7446-27-7	8.2E+01	c	3.8E+02	c	2.3E-01	c	1.0E+00	c	9.1E+00	c		7.5E-05	c		
				2.10E-01	C	8.00E-05	C				1	0.1		~Lead acetate	301-04-2	2.6E+00	c	1.1E+01	c	3.5E-02	c	1.5E-01	c	3.7E-01	c					
				3.80E-02	C	1.10E-05	C				1	0.1		~Lead and Compounds	7439-92-1	2.0E+02	G	8.0E+02	G	1.5E-01	G			1.5E+01	G	1.5E+01			1.4E+01	
											1			~Lead and Compounds (with other sources of lead present, see Guidance)	7439-92-1	1.0E+02	G													
										1			~Lead subacetate	1335-32-6	1.4E+01	c	6.0E+01	c	2.6E-01	c	1.1E+00	c	2.1E+00	c		4.5E-04	c			
				1.00E-07	I			V		1		2.43E+00	~Tetraethyl Lead	78-00-2	7.8E-03	n	1.2E-01	n					1.3E-03	n		4.7E-06	n			
				5.00E-06	P			V		1		3.83E+02	Lewisite	541-25-3	3.9E-01	n	5.8E+00	n					9.0E-02	n		3.8E-05	n			
				7.70E-03	O				1	0.1			Lunuron	330-55-2	4.9E+02	n	6.3E+03	n					1.3E+02	n		1.1E-01	n			
				2.00E-03	P				1				Lithium	7439-93-2	1.6E+02	n	2.3E+03	n					4.0E+01	n		1.2E+01	n			
				5.00E-04	I				1	0.1			MCPA	94-74-6	3.2E+01	n	4.1E+02	n					7.5E+00	n		2.0E-03	n			
				4.40E-02	O				1	0.1			MCPB	94-81-5	2.8E+03	n	3.6E+04	n					6.5E+02	n		2.6E-01	n			
				1.00E-03	I				1	0.1			MCPP	93-65-2	6.3E+01	n	8.2E+02	n					1.6E+01	n		4.7E-03	n			
				2.00E-02	I				1	0.1			Malathion	121-75-5	1.3E+03	n	1.6E+04	n					3.9E+02	n		1.0E-01	n			
				1.00E-01	I	7.00E-04	C		1	0.1				Maleic Anhydride	108-31-6	6.3E+03	n	8.0E+04	n	7.3E-01	n	3.1E+00	n	1.9E+03	n		3.8E-01	n		
				5.00E-01	I				1	0.1			Maleic Hydrazide	123-33-1	3.2E+04	n	4.1E+05	nm					1.0E+04	n		2.1E+00	n			
				1.00E-04	P				1	0.1			Malononitrile	109-77-3	6.3E+00	n	8.2E+01	n					2.0E+00	n		4.1E-04	n			
				3.00E-02	H				1	0.1			Mancozeb	8018-01-7	1.9E+03	n	2.5E+04	n					5.4E+02	n		7.6E-01	n			
				5.00E-03	I				1	0.1			Maneb	12427-38-2	3.2E+02	n	4.1E+03	n					9.8E+01	n		1.4E-01	n			
				1.40E-01	I	5.00E-05	I		1				Manganese (Diet)	7439-96-5					5.2E-02	n	2.2E-01	n								
				2.40E-02	G	5.00E-05	I		0.04				Manganese (Non-diet)	7439-96-5	1.8E+03	n	2.6E+04	n	5.2E-02	n	2.2E-01	n	4.3E+02	n		2.8E+01	n			
				9.00E-05	H				1	0.1			Mephosfolan	950-10-7	5.7E+00	n	7.4E+01	n					1.8E+00	n		2.6E-03	n			
				3.00E-02	I				1	0.1				Merquat Chloride	24307-26-4	1.9E+03	n	2.5E+04	n					6.0E+02	n		2.0E-01	n		
				1.10E-02	P			4.00E-03	P			1	0.1		Mercaptobenzothiazole, 2-	149-30-4	4.9E+01	c**	2.1E+02	c*					6.3E+00	c*		1.8E-02	c*	
						3.00E-04	I	3.00E-04	G			0.07			Mercury Compounds															
						3.00E-04	I	V				3.13E+00	~Mercuric Chloride (and other Mercury salts)	7487-94-7	2.3E+01	n	3.5E+02	n	3.1E-01	n	1.3E+00	n	5.7E+00	n	2.0E+00	3.3E-02	n	1.0E-01		
				1.00E-04	I				1				~Mercury (elemental)	7439-97-6	1.1E+01	ns	4.6E+01	ns	3.1E-01	n	1.3E+00	n	6.3E-01	n	2.0E+00					
				8.00E-05	I				1	0.1			~Methyl Mercury	22967-92-6	7.8E+00	n	1.2E+02	n					2.0E+00	n		1.4E+01	n			
				3.00E-05	I			V					~Phenylmercuric Acetate	62-38-4	5.1E+00	n	6.6E+01	n					1.6E+00	n		5.0E-04	n			
				3.00E-05	I				1				Merphos	150-50-5	2.3E+00	n	3.5E+01	n					6.0E-01	n		5.9E-02	n			
				6.00E-02	I				1	0.1			Metalaxyl	57837-19-1	3.8E+03	n	4.9E+04	n					1.2E+03	n		3.3E-01	n			
				1.00E-04	I	3.00E-02	P	V		1		4.58E+03	Methacrylonitrile	126-98-7	7.5E+00	n	1.0E+02	n	3.1E+01	n	1.3E+02	n	1.9E+00	n		4.3E-04	n			
				5.00E-05	I				1	0.1				Methamidophos	10265-92-6	3.2E+00	n	4.1E+01	n					1.0E+00	n		2.1E-04	n		
						2.00E+00	I	2.00E+01	I	V		1		1.06E+05	Methanol	67-56-1	1.2E+05	nms	1.2E+06	nms	2.1E+04	n	8.8E+04	n	2.0E+04	n		4.1E+00	n	
				1.50E-03	O				1	0.1			Methidathion	950-37-8	9.5E+01	n	1.2E+03	n					2.9E+01	n		7.1E-03	n			
				2.50E-02	I				1	0.1			Methomyl	16752-77-5	1.6E+03	n	2.1E+04	n					5.0E+02	n		1.1E-01	n			
				5.00E-03	I				1	0.1			Methoxy-5-nitroaniline, 2-	99-59-2	1.1E+01	c	4.7E+01	c					1.5E+00	c		5.3E-04	c			
				8.00E-03	P	1.00E-03	P	V		1	1.15E+05	Methoxychlor	72-43-5	3.2E+02	n	4.1E+03	n					3.7E+01	n	4.0E+01	2.0E+00	n	2.2E+00			
				5.00E-03	P	7.00E-03	P	V		1	1.06E+05	Methoxyethanol Acetate, 2-	110-49-6	1.1E+02	n	5.1E+02	n	1.0E+00	n	4.4E+00	n	2.1E+00	n		4.2E-04	n				
				1.00E+00	X			V		1	2.90E+04	Methoxyethanol, 2-	109-86-4	2.6E+02	n	2.0E+03	n	7.3E+00	n	3.1E+01	n	1.3E+01	n		2.6E-03	n				
						2.00E-02	P	V		1	2.90E+04	Methyl Acetate	79-20-9	7.8E+04	ns	1.2E+06	nms					2.0E+04	n		4.1E+00	n				
						2.00E-02	P	V		1	6.75E+03	Methyl Acrylate	96-33-3	1.5E+02	n	6.1E+02	n	2.1E+01	n	8.8E+01	n	4.2E+01	n		8.9E-03	n				
				6.00E-01	I	5.00E+00	I	V		1	2.84E+04	Methyl Ethyl Ketone (2-Butanone)	78-93-3	2.7E+04	n	1.9E+05	nms	5.2E+03	n	2.2E+04	n	5.6E+03	n		1.2E+00	n				
				1.00E-03	X	2.00E																								

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																														
Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs					
SFO (mg/kg-day) ¹	key	IUR (ug/m ³) ¹	key	RfD _o (mg/kg-day)	key	RfC _i (mg/m ³)	key	v	o	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
1.00E-01	P	4.30E-04	C	2.00E-03	P					M	1	0.1		Methylene-bis(2-chloroaniline), 4,4'-	101-14-4	1.2E+00	c	2.3E+01	c*	2.4E-03	c	2.9E-02	c	1.6E-01	c			1.8E-03	c	
4.60E-02	I	1.30E-05	C								1	0.1		Methylene-bis(N,N-dimethyl) Aniline, 4,4'-	101-61-1	1.2E+01	c	5.0E+01	c	2.2E-01	c	9.4E-01	c	7.0E-01	c			3.9E-03	c	
1.60E+00	C	4.60E-04	C			2.00E-02	C				1	0.1		Methylenbisbenzenamine, 4,4'-	101-77-9	3.4E-01	c	1.4E+00	c	6.1E-03	c	2.7E-02	c	4.7E-02	c			2.1E-04	c	
				7.00E-02	H	6.00E-04	I				1	0.1	5.00E+02	Methylenediphenyl Diisocyanate	101-68-8	8.5E+05	nm	3.6E+06	nm	6.3E-01	n	2.6E+00	n					1.2E+00	n	
				1.50E-01	I			V			1	0.1		Methylstyrene, Alpha-	98-83-9	5.5E+03	ns	8.2E+04	ns					7.8E+02	n			3.2E+00	n	
				2.50E-02	I						1	0.1		Metolachlor	51218-45-2	9.5E+03	n	1.2E+05	nm					2.7E+03	n			1.5E-01	n	
				2.50E-01	I						1	0.1		Metribuzin	21087-64-9	1.6E+03	n	2.1E+04	n					4.9E+02	n			1.9E+00	n	
		4.50E-06	X	1.00E-02	X	1.00E-01	P	V			1		6.86E+00	Metsulfuron-methyl	74223-64-6	1.6E+04	n	2.1E+05	nm					4.9E+03	n			1.8E-02	c*	
				1.00E-02	X						1			Midrange Aliphatic Hydrocarbon Streams	E1790669	6.5E-01	c	2.8E+00	c	6.2E-01	c	2.7E+00	c	1.2E+00	c*					
1.80E+01	C	5.10E-03	C	3.00E+00	P						1		3.42E-01	Mineral oils	8012-95-1	2.3E+05	nms	3.5E+06	nms					6.0E+04	n			2.4E+03	n	
				2.00E-04	I			V			1			Mirex	2385-85-5	3.6E-02	c	1.7E-01	c	5.5E-04	c	2.4E-03	c	8.8E-04	c			6.3E-04	c	
				2.00E-03	I						1	0.1		Molinate	2212-67-1	1.3E+02	n	1.6E+03	n					3.0E+01	n			1.7E-02	n	
				5.00E-03	I	2.00E-03	A				1			Molybdenum	7439-98-7	3.9E+02	n	5.8E+03	n	2.1E+00	n	8.8E+00	n	1.0E+02	n	4.0E+03(G)		2.0E+00	n	
				1.00E-01	I						1			Monochloramine	10599-90-3	7.8E+03	n	1.2E+05	nm					2.0E+03	n					
				2.00E-03	P						1	0.1		Monomethylaniline	100-61-8	1.3E+02	n	1.6E+03	n					3.8E+01	n			1.4E-02	n	
				2.50E-02	I						1	0.1		Myclobutanil	88671-89-0	1.6E+03	n	2.1E+04	n					4.5E+02	n			5.6E+00	n	
				3.00E-04	X						1	0.1		N,N'-Diphenyl-1,4-benzenediamine	74-31-7	1.9E+01	n	2.5E+02	n					3.6E+00	n			3.7E-01	n	
				2.00E-03	I			V			1			Naled	300-76-5	1.6E+02	n	2.3E+03	n					4.0E+01	n			1.8E-02	n	
1.80E+00	C	0.00E+00	C	3.00E-02	X	1.00E-01	P	V			1	0.1		Naphtha, High Flash Aromatic (HFAN)	64742-95-6	2.3E+03	n	3.5E+04	n	1.0E+02	n	4.4E+02	n	1.5E+02	n			2.0E-04	c	
				1.20E-01	O						1	0.1		Naphthylamine, 2-	91-59-8	3.0E-01	c	1.3E+00	c					3.9E-02	c			1.3E+01	c	
											1	0.1		Napropamide	15299-99-7	7.6E+03	n	9.8E+04	n					2.0E+03	n			4.5E-02	n	
		2.60E-04	C	1.10E-02	C	1.40E-05	C				1	0.1		Nickel Acetate	373-02-4	6.7E+02	n	8.1E+03	n	1.1E-02	c**	4.7E-02	c**	2.2E+02	n					
		2.60E-04	C	1.10E-02	C	1.40E-05	C				1	0.1		Nickel Carbonate	3333-67-3	6.7E+02	n	8.1E+03	n	1.1E-02	c**	4.7E-02	c**	2.2E+02	n					
		2.60E-04	C	1.10E-02	C	1.40E-05	C	V			1			Nickel Carbonyl	13463-39-3	8.2E+02	n	1.1E+04	n	1.1E-02	c**	4.7E-02	c**	2.2E-02	c**					
		2.60E-04	C	1.10E-02	C	1.40E-05	C				0.04			Nickel Hydroxide	12054-48-7	8.2E+02	n	1.1E+04	n	1.1E-02	c**	4.7E-02	c**	2.0E+02	n					
		2.60E-04	C	1.10E-02	C	2.00E-05	C				0.04			Nickel Oxide	1313-99-1	8.4E+02	n	1.2E+04	n	1.1E-02	c**	4.7E-02	c**	2.0E+02	n					
		2.40E-04	I	1.10E-02	C	1.40E-05	C				0.04			Nickel Refinery Dust	E715532	8.2E+02	n	1.1E+04	n	1.2E-02	c**	5.1E-02	c**	2.2E+02	n			3.2E+01	n	
		2.60E-04	C	2.00E-02	I	1.00E-05	T				0.04			Nickel Soluble Salts	7440-02-0	1.4E+03	n	1.7E+04	n	1.0E-02	n	4.4E-02	n	3.9E+02	n			2.6E+01	n	
1.70E+00	C	4.80E-04	I	1.10E-02	C	1.40E-05	C				0.04			Nickel Sulfide	12035-72-2	4.1E-01	c	1.9E+00	c	5.8E-03	c**	2.6E-02	c**	4.5E-02	c					
9.10E-01	C	2.60E-04	C	1.10E-02	C	1.40E-05	C				0.1			Nickelocene	1271-28-9	6.0E-01	c	2.5E+00	c	1.1E-02	c**	4.7E-02	c**	8.6E-02	c					
		1.60E+00	I								1			Nitrate (measured as nitrogen)	14797-55-8	1.3E+05	nm	1.9E+06	nm					3.2E+04	n	1.0E+04	1.0E+04			
				1.00E-01	I						1			Nitrate + Nitrite (measured as nitrogen)	E701177											1.0E+04	1.0E+03			
				1.00E-02	X	5.00E-05	X				1	0.1		Nitrite (measured as nitrogen)	14797-65-0	7.8E+03	n	1.2E+05	nm					2.0E+03	n					
2.00E-02	P			4.00E-03	P	6.00E-03	P				1	0.1		Nitroaniline, 2-	88-74-4	6.3E+02	n	8.0E+03	n	5.2E-02	n	2.2E-01	n	1.9E+02	n			8.0E-02	n	
				4.00E-03	P	6.00E-03	P				1	0.1		Nitroaniline, 4-	100-01-6	2.7E+01	c**	1.1E+02	c*	6.3E+00	n	2.6E+01	n	3.8E+00	c*			1.6E-03	c*	
				2.00E-03	I	9.00E-03	I	V			1		3.05E+03	Nitrobenzene	98-95-3	5.1E+00	c*	2.2E+01	c*	7.0E-02	c	3.1E-01	c	1.4E-01	c*			9.2E-05	c*	
				3.00E+03	P						1	0.1		Nitrocellulose	9004-70-0	1.9E+08	nm	2.5E+09	nm					6.0E+07	n			1.3E+04	n	
				7.00E-02	H						1	0.1		Nitrofurantoin	67-20-9	4.4E+03	n	5.7E+04	n					1.4E+03	n			6.1E-01	n	
1.30E+00	C	3.70E-04	C								1	0.1		Nitrofurazone	59-87-0	4.2E-01	c	1.8E+00	c	7.6E-03	c	3.3E-02	c	6.0E-02	c			5.4E-05	c	
1.70E-02	P			1.00E-04	P						1	0.1		Nitroglucerin	55-63-0	6.3E+00	n	8.2E+01	n					2.0E+00	n			8.5E-04	n	
				1.00E-01	I						1	0.1		Nitroguanidine	556-88-7	6.3E+03	n	8.2E+04	n					2.0E+03	n			4.8E-01	n	
		8.80E-06	P			5.00E-03	P	V			1		1.80E+04	Nitromethane	75-52-5	5.4E+00	c*	2.4E+01	c*	3.2E-01	c*	1.4E+00	c*	6.4E-01	c*			1.4E-04	c*	
		5.80E-04	X			2.00E-02	I	V			1		4.86E+03	Nitropropane, 2-	79-46-9	6.4E-02	c	2.8E-01	c	4.8E-03	c	2.1E-02	c	9.7E-03	c			2.5E-06	c	
2.70E+01	C	7.70E-03	C								1	0.1		Nitroso-N-ethylurea, N-	759-73-9	4.5E-03														

Toxicity and Chemical-specific Information														Contaminant		Screening Levels										Protection of Groundwater SSLs		
SFO (mg/kg-day) ¹	key	IUR (ug/m ³) ¹	key	RfD _o (mg/kg-day)	key	RfC _i (mg/m ³)	key	vol	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
				1.00E+00	P	V				1		3.88E+02	Pentane, n-	109-66-0	8.1E+02	ns	3.4E+03	ns	1.0E+03	n	4.4E+03	n	2.1E+03	n			1.0E+01	n
2.93E+04	D			3.00E-06	D					1		0.1	Per- and Polyfluoroalkyl Substances (PFAS)														2.2E-05	n
				1.00E-03	I			V		1		2.68E+02	~Ammonium perfluoro-2-methyl-3-oxahexanoate	62037-80-3	1.9E-01	n	2.5E+00	n					2.1E-02	n		6.8E-03	n	
				5.00E-04	I					1	0.1		~Ammonium perfluorobutanoate	10495-86-0	7.8E+01	n	1.2E+03	ns					1.9E+01	n		1.7E-03	n	
				3.00E-08	D					1	0.1		~Ammonium perfluorohexanoate	21615-47-4	3.2E+01	n	4.1E+02	n					7.2E+00	n		4.0E-08	c	
				3.00E-04	R				V	1			~Ammonium perfluorooctanoate	3825-26-1	1.9E-05	c	7.8E-05	c					2.7E-06	c		1.9E-03	n	
				3.00E-04	R			V	1			1.92E+06	~Bis(trifluoromethyl)sulfonylamine (TFSL)	82113-65-3	2.3E+01	n	3.5E+02	n					5.9E+00	n		1.5E-05	n	
3.95E+01	D			3.00E-06	D			V	1			2.56E+03	~Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	2.3E-01	n	3.5E+00	n					1.5E-02	n	1.0E-02(G)	1.6E-05	n	1.0E-05
				3.00E-04	R			V	1			~Lithium bis(trifluoromethyl)sulfonylazanide	90076-65-6	2.3E+01	n	3.5E+02	n					6.0E+00	n		1.9E-03	n		
				3.00E-04	P				1	0.1		~Perfluorobutanesulfonate	45187-15-3	1.9E+01	n	2.5E+02	n					6.0E+00	n		3.0E-03	n		
				3.00E-04	P			V	1	0.1		~Perfluorobutanesulfonic acid (PFBS)	375-73-5	1.9E+01	n	2.5E+02	n					6.0E+00	n	(G)	3.0E-03	n		
				1.00E-03	I			V	1		2.56E+03	~Perfluorobutanoate	45048-62-2	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.3E-03	n		
				1.00E-03	I			V	1		2.57E+03	~Perfluorobutanoic acid (PFBA)	375-22-4	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.5E-03	n		
2.93E+04	D			5.00E-05	N				1	0.1		~Perfluorododecanoic acid (PFDoDA)	307-55-1	3.2E+00	n	4.1E+01	n					1.0E+00	n		1.7E-01	n		
				2.00E-05	A				1	0.1		~Perfluorohexanesulfonate	108427-53-8	1.3E+00	n	1.6E+01	n					3.9E-01	n		1.7E-04	n		
				2.00E-05	A				1	0.1		~Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1.3E+00	n	1.6E+01	n					3.9E-01	n	1.0E-02(G)	1.7E-04	n	4.2E-06	
				5.00E-04	I				1	0.1		~Perfluorohexanoate	92612-52-7	3.2E+01	n	4.1E+02	n					6.1E+00	n		1.5E-03	n		
				5.00E-04	I				1	0.1		~Perfluorohexanoic acid (PFHxA)	307-24-4	3.2E+01	n	4.1E+02	n					9.9E+00	n		2.4E-03	n		
				3.00E-06	A				1	0.1		~Perfluorononanoate	72007-68-2	1.9E-01	n	2.5E+00	n					5.9E-02	n		2.5E-04	n		
2.93E+04	D			3.00E-06	A				1	0.1		~Perfluorononanoic acid (PFNA)	375-95-1	1.9E-01	n	2.5E+00	n					5.9E-02	n	1.0E-02(G)	2.5E-04	n	4.2E-05	
				4.00E-02	N				1	0.1		~Perfluorooctadecanoic acid (PFODA)	16517-11-6	2.5E+03	n	3.3E+04	n					8.0E+02	n		2.2E+02	n		
				1.00E-07	D				1	0.1		~Perfluorooctanesulfonate	45298-90-6	6.3E-03	n	5.8E-02	c**					2.0E-03	c**		1.5E-05	c**		
				1.00E-07	D				1	0.1		~Perfluorooctanesulfonic acid (PFOS)	1763-23-1	6.3E-03	n	5.8E-02	c**					2.0E-03	c**	4.0E-03	1.5E-05	c**	3.0E-05	
				2.93E+04	D			3.00E-08	D			1	0.1	~Perfluorooctanoate	45285-51-6	1.9E-05	c	7.8E-05	c					2.7E-06	c	4.0E-08	c	
				2.93E+04	D			3.00E-08	D			1	0.1	~Perfluorooctanoic acid (PFOA)	335-67-1	1.9E-05	c	7.8E-05	c					2.7E-06	c	4.0E-03	4.0E-08	c
3.95E+01	D			5.00E-04	R			V	1			1.36E+04	~Perfluoropropanoic acid (PFPrA)	422-64-0	3.9E+01	n	5.8E+02	n					9.8E+00	n		2.1E-03	n	
				1.00E-03	N				1	0.1		~Perfluorotetradecanoic acid (PFTeDA)	376-06-7	6.3E+01	n	8.2E+02	n					2.0E+01	n		9.4E+00	n		
				3.00E-04	N				1	0.1		~Perfluoroundecanoic acid (PFUDA)	2058-94-8	1.9E+01	n	2.5E+02	n					6.0E+00	n		4.5E-02	n		
				2.00E-03	I			V	1		9.61E+04	~Potassium heptafluorobutanoate	2966-54-3	1.6E+02	n	2.3E+03	n					3.8E+01	n		1.3E-02	n		
				3.00E-04	P				1	0.1		~Potassium perfluorobutanesulfonate	29420-49-3	1.9E+01	n	2.5E+02	n					6.0E+00	n		3.0E-03	n		
				1.00E-07	D				1	0.1		~Potassium perfluorooctanesulfonate	2795-39-3	6.3E-03	n	5.8E-02	c**					2.0E-03	c**		1.5E-05	c**		
2.20E-03	C	6.30E-07	C	1.00E-03	I			V	1			8.99E+04	~Sodium perfluorobutanoate	2218-64-4	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.4E-03	n	
				5.00E-04	I				1	0.1		~Sodium perfluorohexanoate	2923-26-4	3.2E+01	n	4.1E+02	n					1.0E+01	n		2.4E-03	n		
				7.00E-04	I				1			~Ammonium Perchlorate	7790-98-9	5.5E+01	n	8.2E+02	n					1.4E+01	n					
				7.00E-04	I				1			~Lithium Perchlorate	7791-03-9	5.5E+01	n	8.2E+02	n					1.4E+01	n					
				7.00E-04	I				1			~Perchlorate and Perchlorate Salts	14797-73-0	5.5E+01	n	8.2E+02	n					1.4E+01	n	1.5E+01(G)				
				7.00E-04	I				1			~Potassium Perchlorate	7778-74-7	5.5E+01	n	8.2E+02	n					1.4E+01	n					
2.20E-03	C	6.30E-07	C	1.00E-03	I				1	0.1		Permethrin	52645-53-1	3.2E+03	n	4.1E+04	n					1.0E+03	n				2.4E+02	n
				2.40E-01	O				1	0.1		Phenacetin	62-44-2	2.5E+02	c	1.0E+03	c	4.5E+00	c	1.9E+01	c	3.4E+01	c		9.7E-03	c		
				3.00E-01	I	2.00E-01	C		1	0.1		Phenmedipham	13684-63-4	1.5E+04	n	2.0E+05	nm					3.8E+03	n		2.1E+01	n		
				4.00E-03	I				1	0.1		Phenol	108-95-2	1.9E+04	n	2.5E+05	nm	2.1E+02	n	8.8E+02	n	5.8E+03	n		3.3E+00	n		
				5.00E-04	X				1	0.1		Phenol, 2-(1-methylethoxy)-, methylcarbamate	114-26-1	2.5E+02	n	3.3E+03	n					7.8E+01	n		2.5E-02	n		
				2.00E-04	X			V	1		1.29E+02	Phenothiazine	92-84-2	3.2E+01	n	4.1E+02	n					4.3E+00	n		1.4E-02	n		
1.94E-03	H			6.00E-03	I				1	0.1		Phenyl isothiocyanate	103-72-0	1.6E+01	n	2.3E+02	ns					2.6E+00	n		1.7E-03	n		
				4.00E-03	P				1	0.1		Phenylenediamine, m-	108-45-2	3.8E+02	n	4.9E+03	n					1.2E+02	n		3.2E-02	n		
				1.00E-03	X				1	0.1		Phenylenediamine, o-	95-54-5	4.5E+00	c*	1.9E+01	c					6.5E-01	c		1.7E-04	c		
				2.00E-04	H				1	0.1		Phenylenediamine, p-	106-50-3	6.3E+01	n	8.2E+02	n					2.0E+01	n		5.4E-03	n		
				3.00E-04	I	V			1		1.61E+03	Phenylphenol, 2-	90-43-7	2.8E+02	c	1.2E+03	c					3.0E+01	c		4.1E-01	c		
				2.00E-04	H				1	0.1		Phosphate	298-02-2	1.3E+01	n	1.6E+02	n					3.0E+00	n		3.4E-03	n		
2.20E-03	C	6.30E-07	C	1.00E-03	I				1	0.1		Phosgene	75-44-5	3.1E-01	n	1.3E+00	n	3.1E-01	n	1.3E+00	n	6.3E-01	n		1.6E-04	n		
				2.00E-02	I				1	0.1		Phosmet	732-11-6	1.3E+03	n	1.6E+04	n					3.7E+02	n		8.2E-02	n		
				2.93E+00	X				1			Phosphates, Inorganic																
				3.00E-01	X				1			~Aluminum metaphosphate	13776-88-0	2.3E+05	nm	3.4E+06	nm					5.9E+04	n					
				1.00E+00	P				1			~Aluminum salts of inorganic phosphates	E524680405	2.3E+04	n	3.5E+05	nm					6.0E+03	n					
				1.00E+00	P				1			~Dipotassium phosphate	7758-11-4	7.8E+04	n	1.2E+06	nm					2.0E+04	n					
2.20E-03	C			1.00E+00	P				1			~Disodium phosphate	7558-79-4	7.8E+04	n	1.2E+06	nm					2.0E+04	n					

Toxicity and Chemical-specific Information																	Contaminant		Screening Levels										Protection of Groundwater SSLs	
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD ₀ (mg/kg-day)	k e y	RfC ₁ (mg/m ³)	k e y	o v o l	mutagen	GIABS	ABS ₀	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)		
				3.00E-04 1.00E+00 2.00E-05	I P I	3.00E-04 1.00E-02	I V			1 1 1			Phosphine Phosphoric Acid Phosphorus, White Phthalates	7803-51-2 7664-38-2 7723-14-0	2.3E+01 7.8E+04 1.6E+00	n n n	3.5E+02 1.1E+06 2.3E+01	n n n	3.1E-01 1.0E+01 4.0E-01	n n n	1.3E+00 4.4E+01 4.0E-01	n n n	5.7E-01 2.0E+04 4.0E-01	n n n		1.5E-03	n			
1.40E-02 1.90E-03	I P	2.40E-06	C	2.00E-02 2.00E-01 1.00E+00 1.00E-01	I I I I					1 1 1 1	0.1 0.1 0.1 0.1		~Bis(2-ethylhexyl)phthalate ~Butyl Benzyl Phthalate ~Butylphthalyl Butylglycolate ~Dibutyl Phthalate	117-81-7 85-68-7 85-70-1 84-74-2	3.9E+01 2.9E+02 6.3E+04 6.3E+03	c* c nm n	1.6E+02 1.2E+03 8.2E+05 8.2E+04	c c nm n	1.2E+00 5.1E+00 1.3E+04 9.0E+02	c c n n	5.6E+00 1.6E+01 1.3E+04 9.0E+02	c* c n n	6.0E+00	1.3E+00 2.4E-01 3.1E+02 2.3E+00	c* c n n	1.4E+00				
				8.00E-01 1.00E-01 1.00E-02 5.00E-01 2.00E+00 7.00E-02	I I P X O X					1 1 1 1 1 1	0.1 0.1 0.1 0.1 0.1 0.1		~Diethyl Phthalate ~Dimethylterephthalate ~Octyl Phthalate, di-N- ~Phthalic Acid, p- ~Phthalic Anhydride Picloram	84-66-2 120-61-6 117-84-0 100-21-0 85-44-9 1918-02-1	5.1E+04 7.8E+03 6.3E+02 3.2E+04 1.3E+05 4.4E+03	n n n n nm n	6.6E+05 1.2E+05 8.2E+03 4.1E+05 1.6E+06 5.7E+04	nm n n n nm n	2.1E+01 8.8E+01 1.4E+03	n n n n n n	9.4E+03 3.9E+04 1.4E+03	n n n n n n	5.0E+02	3.4E+00 8.5E+00 3.8E-01	n n n	1.4E-01				
				1.00E-04 2.00E-03 7.30E-04	X X O					1 1 1	0.1 0.1 0.1		Picramic Acid (2-Amino-4,6-dinitrophenol) Picric Acid (2,4,6-Trinitrophenol) Pirimiphos, Methyl	96-91-3 88-89-1 29232-93-7	6.3E+00 1.3E+02 4.6E+01	n n n	8.2E+01 1.6E+03 6.0E+02	n n n			2.0E+00 4.0E+01 8.9E+00	n n n		1.3E-03 1.9E-01 8.4E-03	n n n					
3.00E+01	C	8.60E-03	C	7.00E-06	H					1	0.1		Polybrominated Biphenyls Polychlorinated Biphenyls (PCBs)	36355-01-8	1.8E-02	c*	7.7E-02	c*	3.3E-04	c	1.4E-03	c	2.6E-03	c*						
7.00E-02	G	2.00E-05	G	7.00E-05	I					1	0.14		~Aroclor 1016	12674-11-2	4.1E+00	n	2.7E+01	c**	1.4E-01	c	6.1E-01	c	2.2E-01	c**		2.1E-02	c**			
2.00E+00 2.00E+00 2.00E+00	G G G	5.71E-04 5.71E-04 5.71E-04	G G G							1 1 1	0.14 0.14 0.14		~Aroclor 1221 ~Aroclor 1232 ~Aroclor 1242	11104-28-2 11141-16-5 53469-21-9	2.0E-01 1.7E-01 2.3E-01	c c c	8.3E-01 7.2E-01 9.5E-01	c c c	4.9E-03 2.1E-02 4.9E-03	c c c	2.1E-02 2.1E-02 2.1E-02	c c c	4.7E-03 4.7E-03 7.8E-03	c c c		8.0E-05 8.0E-05 1.2E-03	c c c			
2.00E+00 2.00E+00 2.00E+00	G G G	5.71E-04 5.71E-04 5.71E-04	G G G	2.00E-05	I					1 1 1	0.14 0.14 0.14		~Aroclor 1248 ~Aroclor 1254 ~Aroclor 1260	12672-29-6 11097-69-1 11096-82-5	2.3E-01 2.4E-01 2.4E-01	c c** c	9.4E-01 9.7E-01 9.9E-01	c c* c	4.9E-03 4.9E-03 4.9E-03	c c c	2.1E-02 2.1E-02 2.1E-02	c c c	7.8E-03 7.8E-03 7.8E-03	c c* c		1.2E-03 2.0E-03 5.5E-03	c c* c			
3.90E+00 3.90E+00 3.90E+00 3.90E+00 3.90E+00 3.90E+00 3.90E+00 3.90E+00 3.90E+00 1.30E+04 2.00E+00	W W W W W W W W W W I	1.14E-03 1.14E-03 1.14E-03 1.14E-03 1.14E-03 1.14E-03 1.14E-03 1.14E-03 1.14E-03 3.80E+00 5.71E-04	W W W W W W W W W W I	2.33E-05 2.33E-05 2.33E-05 2.33E-05 2.33E-05 2.33E-05 2.33E-05 2.33E-05 2.33E-05 7.00E-09 5.71E-04	X W W W W W W W W W I	1.33E-03 1.33E-03 1.33E-03 1.33E-03 1.33E-03 1.33E-03 1.33E-03 1.33E-03 1.33E-03 4.00E-07 5.71E-04	W W W W W W W W W W I		1 1 1 1 1 1 1 1 1 1 1	0.14 0.14 0.14 0.14 0.14 0.14 0.14 0.14 0.14 0.14 0.14		~Aroclor 5460 ~Heptachlorobiphenyl, 2,3,3',4,4',5,5'- (PCB 189) ~Hexachlorobiphenyl, 2,3',4,4',5,5'- (PCB 167) ~Hexachlorobiphenyl, 2,3,3',4,4',5'- (PCB 157) ~Hexachlorobiphenyl, 2,3,3',4,4',5'- (PCB 156) ~Hexachlorobiphenyl, 3,3',4,4',5,5'- (PCB 169) ~Pentachlorobiphenyl, 2,3,4,4',5- (PCB 123) ~Pentachlorobiphenyl, 2,3',4,4',5- (PCB 118) ~Pentachlorobiphenyl, 2,3,3',4,4'- (PCB 105) ~Pentachlorobiphenyl, 2,3,4,4',5- (PCB 114) ~Pentachlorobiphenyl, 3,3',4,4',5- (PCB 126) ~Polychlorinated Biphenyls (high risk)	11126-42-4 39635-31-9 52663-72-6 69782-90-7 38380-08-4 32774-16-6 65510-44-3 31508-00-6 32598-14-4 74472-37-0 57465-28-8 1336-36-3	3.5E+01 1.3E-01 1.2E-01 1.2E-01 1.2E-01 1.2E-04 1.2E-01 1.2E-01 1.2E-01 3.6E-05 2.3E-01	n c c c c c c c c c c c	4.4E+02 5.2E-01 5.0E-01 5.0E-01 5.0E-01 5.1E-04 4.9E-01 4.9E-01 4.9E-01 1.5E-04 9.4E-01	n c* c c c c c c c c c c	2.5E-03 2.5E-03 2.5E-03 2.5E-03 2.5E-03 2.5E-06 2.5E-03 2.5E-03 2.5E-03 3.2E-06 9.4E-01	c c c c c c c c c c c	1.1E-02 1.1E-02 1.1E-02 1.1E-02 1.1E-02 1.1E-05 1.1E-02 1.1E-02 1.1E-02 3.2E-06 2.1E-02	c c c c c c c c c c c	4.0E-03 4.0E-03 4.0E-03 4.0E-03 4.0E-03 4.0E-06 4.0E-03 4.0E-03 4.0E-03 1.2E-06 4.4E-02	c c c c c c c c c c c		1.7E-03 1.7E-03 1.7E-06 1.0E-03 1.0E-03 1.0E-03 3.0E-07 5.0E-01	c c c c c c c c c				
4.00E-01 7.00E-02 1.30E+01 3.90E+01	I I W W	1.00E-04 2.00E-05 3.80E-03 1.14E-02	I I W W	1.00E-04 2.00E-05 7.00E-06 2.33E-06	I I W W	1.00E-04 2.00E-05 4.00E-04 6.00E-04	I I W I			1 1 1 1	0.14 0.14 0.14 0.1		~Polychlorinated Biphenyls (low risk) ~Polychlorinated Biphenyls (lowest risk) ~Tetrachlorobiphenyl, 3,3',4,4'- (PCB 77) ~Tetrachlorobiphenyl, 3,4,4',5- (PCB 81) Polymeric Methylene Diphenyl Diisocyanate (PMDI) Polynuclear Aromatic Hydrocarbons (PAHs)	1336-36-3 1336-36-3 32598-13-3 70362-50-4 9016-87-9	3.8E-02 1.2E-02 3.6E-05 2.5E-04 8.5E+05	c* c nm c*	1.6E-01 4.8E-02 1.5E-04 4.8E-02 3.6E+06	c* c c c nm	7.4E-04 2.5E-04 7.4E-07 2.5E-04 6.3E-01	c c c c n	3.2E-03 3.2E-03 3.2E-03 1.1E-03 2.6E+00	c c c c n	6.0E-03 6.0E-03 6.0E-03 4.0E-04 n	c c c c n		9.4E-04 6.2E-05 9.4E-04 6.2E-05	c* c c c			
				6.00E-02 3.00E-01	I I					1 1	0.13 0.13		~Acenaphthene ~Anthracene ~Benz[a]anthracene	83-32-9 120-12-7 56-55-3	3.6E+03 1.8E+04 1.1E+00	n nm c	4.5E+04 2.3E+05 2.1E+01	n nm c			5.3E+02 1.8E+03 3.0E-02	n n c		5.5E+00 5.8E+01 1.1E-02	n n c					
1.00E+00 1.00E-01 1.00E-01	I E E	6.00E-04 6.00E-05 9.00E-05	I E E	3.00E-04 2.00E-06 9.00E-05	I I X	2.00E-06 2.00E-06 2.00E-06	I I X			1 1 1	0.13 0.13 0.1		~Benzo[a]pyrene ~Benzo[b]fluoranthene ~Benzo[e]pyrene	50-32-8 205-99-2 192-97-2	1.1E+00 1.1E+00 5.7E+00	c c n	2.1E+00 2.1E+01 7.3E+01	c c n	1.7E-03 1.7E-02 2.1E-03	c** c n	8.8E-03 2.0E-01 8.8E-03	c n n	2.5E-02 2.5E-01 1.8E+00	c c n	2.0E-01	2.9E-02 3.0E-01 2.2E+00	c c n	2.4E-01		
1.20E+00 1.00E-02	C E	1.10E-04 6.00E-06	C E	1.10E-04 6.00E-06	C E	1.10E-04 6.00E-06	C E			1 1	0.13 0.13		~Benzo[k]fluoranthene ~Benzo[a]fluoranthene ~Chloronaphthalene, Beta-	205-82-3 207-08-9 91-58-7	4.2E-01 1.1E+01 4.8E+03	n c c	1.8E+00 2.1E+02 6.0E+04	n c n	2.6E-02 1.7E-01 3.0E+04	c c c	1.1E-01 2.0E+00 7.5E+02	c c n	6.5E-02 2.5E+00 7.5E+02	c n n		7.8E-02 2.9E+00 3.9E+00	c n n			
1.00E-03 1.00E+00 1.20E+01	E E C	6.00E-07 6.00E-04 1.10E-03	E E C	6.00E-07 6.00E-04 1.10E-03	E E C	6.00E-07 6.00E-04 1.10E-03	E E C			1 1 1	0.13 0.13 0.13		~Chrysene ~Dibenz[a,h]anthracene ~Dibenz[a,e]pyrene	218-01-9 53-70-3 192-65-4	1.1E+02 1.1E-01 4.2E-02	c c c	2.1E+03 2.1E+00 1.8E-01	c c c	1.7E+00 1.7E-03 2.6E-03	c c c	2.0E+01 2.0E-02 1.1E-02	c c c	2.5E+01 2.5E-02 6.5E-03	c c c		9.0E+00 9.6E-02 8.4E-02	c c c			
2.50E+02	C	7.10E-02	C							1	0.13		~Dimethylbenz[a]anthracene, 7,12- ~Fluoranthene ~Fluorene	57-97-6 206-44-0 86-73-7	4.6E-04 2.4E+03 2.4E+03	c n n	8.4E-03 3.0E+04 3.0E+04	c n n	1.4E-05 3.0E+04 3.0E+04	c n n	1.0E-04 8.0E+02 2.9E+02	c n n		9.9E-05 8.9E+01 5.4E+00	c n n					
1.00E-01 5.10E-02	E X	6.00E-05 3.40E-05	E C	6.00E-05 3.40E-05	E C	6.00E-05 3.40E-05	E C			1 1	0.13 0.13		~Indeno[1,2,3-cd]pyrene ~Methylnaphthalene, 1- ~Methylnaphthalene, 2-	193-39-5 90-12-0 91-57-6	1.1E+00 1.8E-01 2.4E+02	c c c	2.1E+01 7.7E-01 3.0E+03	c n c	1.7E-02 3.1E-03 3.1E-03	c n c	2.0E-01 1.3E-02 3.6E-01	c n n	2.5E-01 6.3E-03 1.2E-01	c n c		9.8E-01 3.3E-05 1.9E-01	c n n			
1.20E-01 1.20E+00	C C	3.40E-05 1.10E-04	C C	3.40E-05 1.10E-04	C C	3.40E-05 1.10E-04	C C			1 1	0.13 0.13		~Naphthalene ~Nitrophenyl, 4- ~Perylene	91-20-3 57835-92-4 198-55-0	2.0E+00 4.2E-01 5.4E+00	c* c n	8.6E+00 1.8E+00 6.7E+01	c* c n	8.3E-02 2.6E-02 2.1E-03	c* c n	3.6E-01 1.1E-01 8.8E-03	c* c n								

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																											
Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs		
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD ₀ (mg/kg-day)	k e y	RfC ₁ (mg/m ³)	k e y	o l i m u t a g e n	GIABS	ABS ₂	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
				5.00E-03	P					1	0.1	Toluic Acid, p-	99-94-5	3.2E+02	n	4.1E+03	n					9.0E+01	n		2.3E-02	n	
1.60E-02	P	5.10E-05	C							1	0.1	Toluidine, o- (Methylaniline, 2-)	95-53-4	3.4E+01	c	1.4E+02	c	5.5E-02	c	2.4E-01	c	4.7E+00	c		2.0E-03	c	
3.00E-02	P			4.00E-03	X					1	0.1	Toluidine, p-	106-49-0	1.8E+01	c*	7.7E+01	c*					2.5E+00	c*		1.1E-03	c*	
				3.00E+00	P					1		Total Petroleum Hydrocarbons (Aliphatic High)	E1790670	2.3E+05	nms	3.5E+06	nms					6.0E+04	n		2.4E+03	n	
				5.00E-03	P	4.00E-01	P	V		1		Total Petroleum Hydrocarbons (Aliphatic Low)	E1790666	2.5E+02	ns	1.9E+03	ns	4.2E+02	n	1.8E+03	n	2.8E+01	n		2.0E-02	n	
				1.00E-02	X	1.00E-01	P	V		1		Total Petroleum Hydrocarbons (Aliphatic Medium)	E1790668	9.6E+01	ns	4.4E+02	ns	1.0E+02	n	4.4E+02	n	1.0E+02	n		1.5E+00	n	
				3.00E-04	P	2.00E-06	P		M	1	0.13	Total Petroleum Hydrocarbons (Aromatic High)	E1790676	1.8E+01	n	2.2E+02	n	2.1E-03	n	8.8E-03	n	6.0E+00	n		7.1E+00	n	
1.10E+00	I	3.20E-04	I	1.00E-02	P	6.00E-02	P	V		1		Total Petroleum Hydrocarbons (Aromatic Medium)	E1790674	3.0E+02	ns	1.7E+03	ns	6.3E+01	n	2.6E+02	n	5.7E+01	n		8.3E-02	n	
				9.00E-05	P					1	0.1	Toxaphene	8001-35-2	4.9E-01	c*	2.1E+00	c*	8.8E-03	c	3.8E-02	c	7.1E-02	c*	3.0E+00	1.1E-02	c*	4.6E-01
				3.00E-05	X					1	0.1	Toxaphene, Weathered	E1841606	1.9E+00	n	2.5E+01	n					6.0E-01	n		9.3E-02	n	
				7.50E-03	I					1	0.1	Tralometrin	68841-25-6	4.7E+02	n	6.2E+03	n					1.5E+02	n		5.8E+01	n	
				3.00E-04	A			V		1		Tri-n-butyltin	688-73-3	2.3E+01	n	3.5E+02	n					3.7E+00	n		8.2E-02	n	
				8.00E+01	X					1	0.1	Triacetin	102-76-1	5.1E+06	nm	6.6E+07	nm					1.6E+06	n		4.5E+02	n	
7.17E-02	O			3.40E-02	O					1	0.1	Triadimefon	43121-43-3	2.1E+03	n	2.8E+04	n					6.3E+02	n		5.0E-01	n	
				2.50E-02	O			V		1		Triallate	2303-17-5	9.7E+00	c	4.6E+01	c					4.7E-01	c		1.0E-03	c	
				1.00E-02	I					1	0.1	Triasulfuron	82097-50-5	6.3E+02	n	8.2E+03	n					2.0E+02	n		2.1E-01	n	
				8.00E-03	I					1	0.1	Tribenuron-methyl	101200-48-0	5.1E+02	n	6.6E+03	n					1.6E+02	n		6.1E-02	n	
				5.00E-03	I			V		1		Tribromobenzene, 1,2,4-	615-54-3	3.9E+02	n	5.8E+03	n					4.5E+01	n		6.4E-02	n	
				9.00E-03	X					1	0.1	Tribromophenol, 2,4,6-	118-79-6	5.7E+02	n	7.4E+03	n					1.2E+02	n		2.2E-01	n	
9.00E-03	P			2.00E-04	O					1	0.1	Tribufos	78-48-8	1.3E+01	n	1.6E+02	n					5.7E-01	n		2.8E-03	n	
				1.00E-02	P					1	0.1	Tributyl Phosphate	126-73-8	6.0E+01	c*	2.6E+02	c*					5.2E+00	c*		2.5E-02	c*	
				3.00E-04	P					1	0.1	Tributyltin Compounds	E1790679	1.9E+01	n	2.5E+02	n					6.0E+00	n				
				3.00E-04	I					1	0.1	Tributyltin Oxide	56-35-9	1.9E+01	n	2.5E+02	n					5.7E+00	n		2.9E+02	n	
				3.00E+01	I	5.00E+00	P	V		1		Trichloramine	10025-85-1	6.7E+03	ns	2.8E+04	ns	5.2E+03	n	2.2E+04	n	1.0E+04	n	4.0E+03(G)	2.6E+01	n	
7.00E-02	I			2.00E-02	I					1	0.1	Trichloroacetic Acid	76-13-1	7.8E+00	c	3.3E+01	c					1.1E+00	c	6.0E+01(G)	2.2E-04	c	1.2E-02
2.90E-02	H									1	0.1	Trichloroaniline HCl, 2,4,6-	33663-50-2	1.9E+01	c	7.9E+01	c					2.7E+00	c		7.4E-03	c	
7.00E-03	X			3.00E-05	X					1	0.1	Trichloroaniline, 2,4,6-	634-93-5	1.9E+00	n	2.5E+01	n					4.0E-01	n		3.6E-03	n	
2.90E-02	P			8.00E-04	X					1		Trichlorobenzene, 1,2,3-	87-61-6	6.3E+01	n	9.3E+02	n	2.1E+00	n	8.8E+00	n	1.2E+00	c**	7.0E+01	3.4E-03	c**	2.0E-01
				1.00E-02	I	2.00E-03	P	V		1		Trichlorobenzene, 1,2,4-	120-82-1	2.4E+01	c**	1.1E+02	c**	5.2E+03	n	2.2E+04	n	8.0E+03	n	2.0E+02	2.8E+00	n	7.0E-02
5.70E-02	I	1.60E-05	I	4.00E-03	I	2.00E-04	X	V		1		Trichloroethane, 1,1,1-	71-55-6	8.1E+03	ns	3.6E+04	ns	4.8E-01	c**	3.0E+00	c**	4.9E-01	c**	5.0E+00	8.9E-05	c**	1.6E-03
4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E-03	I	V	M	1		Trichloroethylene	79-00-5	1.1E+00	c**	5.0E+00	c**	1.8E-01	c**	7.7E-01	c**	2.8E-01	c**	5.0E+00	1.8E-04	c**	1.8E-03
				3.00E-01	I					1		Trichlorofluoromethane	75-69-4	2.3E+04	ns	3.5E+05	nms	4.8E-01	c**	3.0E+00	c**	5.2E+03	n		3.3E+00	n	
				1.00E-01	I					1	0.1	Trichlorophenol, 2,4,5-	95-95-4	6.3E+03	n	8.2E+04	n					1.2E+03	n		4.0E+00	n	
1.10E-02	I	3.10E-06	I	1.00E-03	P					1	0.1	Trichlorophenol, 2,4,6-	88-06-2	4.9E+01	c**	2.1E+02	c**	9.1E-01	c	4.0E+00	c	4.1E+00	c**		4.0E-03	c**	
				1.00E-02	I					1	0.1	Trichlorophenoxyacetic Acid, 2,4,5-	93-76-5	6.3E+02	n	8.2E+03	n					1.6E+02	n		6.8E-02	n	
				8.00E-03	I					1	0.1	Trichlorophenoxypropionic acid, -2,4,5	93-72-1	5.1E+02	n	6.6E+03	n					1.1E+02	n	5.0E+01	6.1E-02	n	2.8E-02
				5.00E-03	I			V		1		Trichloropropane, 1,1,2-	598-77-6	3.9E+02	n	5.8E+03	ns					8.8E+01	n		3.5E-02	n	
3.00E+01	I			4.00E-03	I	3.00E-04	I	V	M	1		Trichloropropane, 1,2,3-	96-18-4	5.1E-03	c	1.1E-01	c	3.1E-01	n	1.3E+00	n	7.5E-04	c		3.2E-07	c	
				3.00E-03	X	3.00E-04	P	V		1		Trichloropropene, 1,2,3-	96-19-5	7.3E-01	n	3.1E+00	n	3.1E-01	n	1.3E+00	n	6.2E-01	n		3.1E-04	n	
				2.00E-02	A					1	0.1	Tricresyl Phosphate (TCP)	1330-78-5	1.3E+03	n	1.6E+04	n					1.6E+02	n		1.5E+01	n	
				3.00E-03	I					1	0.1	Tridiphane	58138-08-2	1.9E+02	n	2.5E+03	n					1.8E+01	n		1.3E-01	n	
				2.00E+00	P	7.00E-03	I	V		1	0.1	Triethylamine	121-44-8	1.2E+02	n	4.8E+02	n	7.3E+00	n	3.1E+01	n	1.5E+01	n		4.4E-03	n	
						2.00E+01	P	V		1		Triethylene Glycol	112-27-6	1.3E+05	nm	1.6E+06	nm					4.0E+04	n		8.8E+00	n	
7.70E-03	I			7.50E-03	I					1		Trifluralin	1582-09-8	9.0E+01	c**	4.2E+02	c*					2.6E+00	c*		8.4E-02	c*	
2.00E-02	P			1.00E-02	P					1	0.1	Trimethyl Phosphate	512-56-1	2.7E+01	c*	1.1E+02	c*					3.9E+00	c*		8.6E-04	c*	
				1.00E-02	I	6.00E-02	I	V		1		Trimethylbenzene, 1,2,3-	526-73-8	3.4E+02	ns	2.0E+03	ns	6.3E+01	n	2.6E+02	n	5.5E+01	n		8.1E-02	n	
				1.00E-02	I	6.00E-02	I	V		1		Trimethylbenzene, 1,2,4-	95-														

Toxicity and Chemical-specific Information														Contaminant		Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³ -y)	k e y	RfD _c (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _s	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
3.00E-04	O									1	0.1		Acephate	30560-19-1	1.9E+01	n	2.5E+02	n					6.0E+00	n		1.3E-03	n		
2.20E-06	I					9.00E-03	I	V		1		1.07E+05	Acetaldehyde	75-07-0	1.1E+01	c**	4.9E+01	c**	1.3E+00	c**	5.6E+00	c**	2.6E+00	c**		5.2E-04	c**		
				2.00E-02	I					1	0.1		Acetochlor	34256-82-1	1.3E+03	n	1.6E+04	n					3.5E+02	n		2.8E-01	n		
				9.00E-01	I			V		1		1.14E+05	Acetone	67-64-1	7.0E+04	n	1.1E+06	nms					1.8E+04	n		3.7E+00	n		
						2.00E-03	X			1	0.1		Acetone Cyanohydrin	75-86-5	2.8E+06	nm	1.2E+07	nm	2.1E+00	n	8.8E+00	n							
						6.00E-02	I	V		1		1.28E+05	Acetonitrile	75-05-8	8.1E+02	n	3.4E+03	n	6.3E+01	n	2.6E+02	n	1.3E+02	n		2.6E-02	n		
				1.00E-01	I			V		1		2.52E+03	Acetophenone	98-86-2	7.8E+03	ns	1.2E+05	nms					1.9E+03	n		5.8E-01	n		
3.80E+00	C	1.30E-03	C	5.00E-04	I	2.00E-05	I	V		1	0.1	2.27E+04	Acetylaminofluorene, 2-Acrolein	53-96-3	1.4E-01	c	6.0E-01	c	2.2E-03	c	9.4E-03	c	1.6E-02	c		7.5E-05	c		
										1				107-02-8	1.4E-01	n	6.0E-01	n	2.1E-02	n	8.8E-02	n	4.2E-02	n		8.4E-06	n		
5.00E-01	I	1.00E-04	I	2.00E-03	I	6.00E-03	I	M		1	0.1		Acrylamide	79-06-1	2.4E-01	c	4.6E+00	c	1.0E-02	c	1.2E-01	c	5.0E-02	c		1.1E-05	c		
				5.00E-01	I	2.00E-04	P	V		1		1.09E+05	Acrylic Acid	79-10-7	2.0E+01	n	8.3E+01	n	2.1E-01	n	8.8E-01	n	4.2E-01	n		8.5E-05	n		
5.40E-01	I	6.80E-05	I	9.00E-05	T	2.00E-03	I	V		1		1.13E+04	Acrylonitrile	107-13-1	2.5E-01	c*	1.1E+00	c*	4.1E-02	c*	1.8E-01	c*	5.2E-02	c*		1.1E-05	c*		
						6.00E-03	P			1	0.1		Adiponitrile	111-69-3	8.5E+06	nm	3.6E+07	nm	6.3E+00	n	2.6E+01	n							
5.60E-02	C			1.00E-02	I					1	0.1		Alachlor	15972-60-8	9.7E+00	c*	4.1E+01	c					1.1E+00	c	2.0E+00	8.7E-04	c	1.6E-03	
				1.00E-03	I					1	0.1		Aldicarb	116-06-3	6.3E+01	n	8.2E+02	n					2.0E+01	n	3.0E+00	4.9E-03	n	7.5E-04	
										1	0.1		Aldicarb Sulfone	1646-88-4	6.3E+01	n	8.2E+02	n					2.0E+01	n	2.0E+00	4.4E-03	n	4.4E-04	
1.70E+01	I	4.90E-03	I	3.00E-05	I			V		1			Aldicarb sulfoxide	1646-87-3											4.0E+00				
										1			Aldrin	309-00-2	3.9E-02	c*	1.8E-01	c	5.7E-04	c	2.5E-03	c	9.2E-04	c		1.5E-04	c		
				4.00E-03	P	1.00E-04	X	V		1		1.11E+05	Allyl Alcohol	107-18-6	3.5E+00	n	1.5E+01	n	1.0E-01	n	4.4E-01	n	2.1E-01	n		4.2E-05	n		
2.10E-02	C	6.00E-06	C	1.00E+00	P	5.00E-03	P			1		1.42E+03	Allyl Chloride	107-05-1	7.2E-01	c**	3.2E+00	c**	4.7E-01	c**	2.0E+00	c**	7.3E-01	c**		2.3E-04	c**		
										1			Aluminum	7429-90-5	7.7E+04	n	1.1E+06	nm	5.2E+00	n	2.2E+01	n				3.0E+04	n		
				4.00E-04	I					1			Aluminum Phosphide	20859-73-8	3.1E+01	n	4.7E+02	n					8.0E+00	n					
2.10E+01	C	6.00E-03	C	9.00E-03	I					1	0.1		Ametryn	834-12-8	5.7E+02	n	7.4E+03	n					1.5E+02	n		1.6E-01	n		
										1	0.1		Aminobiphenyl, 4-	92-67-1	2.6E-02	c	1.1E-01	c	4.7E-04	c	2.0E-03	c	3.0E-03	c		1.5E-05	c		
				8.00E-02	P					1	0.1		Aminophenol, m-	591-27-5	5.1E+03	n	6.6E+04	n					1.6E+03	n		6.1E-01	n		
				4.00E-03	X					1	0.1		Aminophenol, o-	95-55-6	2.5E+02	n	3.3E+03	n					7.9E+01	n		3.0E-02	n		
				2.00E-02	P					1	0.1		Aminophenol, p-	123-30-8	1.3E+03	n	1.6E+04	n					4.0E+02	n		1.5E-01	n		
				2.50E-03	I					1	0.1		Amiriaz	33089-61-1	1.6E+02	n	2.1E+03	n					8.2E+00	n		4.2E+00	n		
						5.00E-01	I	V		1			Ammonia	7664-41-7					5.2E+02	n	2.2E+03	n							
				2.00E-03	X					1	0.1		Ammonium Picrate	131-74-8	1.3E+02	n	1.6E+03	n					4.0E+01	n		1.9E-01	n		
				2.00E-01	I					1			Ammonium Sulfamate	7773-06-0	1.6E+04	n	2.3E+05	nm					4.0E+03	n					
5.70E-03	I	1.60E-06	C	7.00E-03	P	1.00E-03	X	V		1	0.1	1.37E+04	Amyl Alcohol, tert-	75-85-4	8.2E+01	n	3.4E+02	n	3.1E+00	n	1.3E+01	n	6.3E+00	n		1.3E-03	n		
										1			Aniline	62-53-3	9.5E+01	c**	4.0E+02	c*	1.0E+00	n	4.4E+00	n	1.3E+01	c*		4.6E-03	c*		
4.00E-02	P			2.00E-03	X					1	0.1		Anthraquinone, 9,10-	84-65-1	1.4E+01	c**	5.7E+01	c*					1.4E+00	c*		1.4E-02	c*		
				4.00E-04	I	3.00E-04	A			0.15			Antimony (metallic)	7440-36-0	3.1E+01	n	4.7E+02	n	3.1E-01	n	1.3E+00	n	7.8E+00	n	6.0E+00	3.5E-01	n	2.7E-01	
				5.00E-04	H					0.15			Antimony Pentoxide	1314-60-9	3.9E+01	n	5.8E+02	n					9.7E+00	n					
				4.00E-04	H					0.15			Antimony Tetroxide	1332-81-6	3.1E+01	n	4.7E+02	n					7.8E+00	n					
						2.00E-04	I						Antimony Trioxide	1309-64-4	2.8E+05	nm	1.2E+06	nm	2.1E-01	n	8.8E-01	n							
1.50E+00	I	4.30E-03	I	3.00E-04	I	1.50E-05	C			1	0.03		Arsenic, inorganic	7440-38-2	6.8E-01	c*G	3.0E+00	c*G	6.5E-04	c*	2.9E-03	c*	5.2E-02	c	1.0E+01	1.5E-03	c	2.9E-01	
				3.50E-06	C	5.00E-05	I			1			Arsine	7784-42-1	2.7E-01	n	4.1E+00	n	5.2E-02	n	2.2E-01	n	7.0E-02	n					
										1			Asbestos (units in fibers)	1332-21-4											7.0E+06(G)				
				3.60E-01	O					1	0.1		Asulam	3337-71-1	2.3E+04	n	3.0E+05	nm					7.2E+03	n		1.8E+00	n		
2.30E-01	C			3.00E-03	A					1	0.1		Atrazine	1912-24-9	2.4E+00	c*	1.0E+01	c					3.0E-01	c	3.0E+00	2.0E-04	c	1.9E-03	
8.80E-01	C	2.50E-04	C							1	0.1		Auramine	492-80-8	6.2E-01	c	2.6E+00	c	1.1E-02	c	4.9E-02	c	7.8E-02	c		7.1E-04	c		
				4.00E-04	I					1	0.1		Avermectin B1	65195-55-3	2.5E+01	n	3.3E+02	n					8.0E+00	n		1.4E+01	n		
1.10E-01	I	3.10E-05	I	3.00E-03	A	1.00E-02	A		V	1			Azinphos-methyl	86-50-0	1.9E+02	n	2.5E+03	n	1.0E+01	n	4.4E+01	n	5.6E+01	n		1.7E-02	n		
				1.00E+00	P	7.00E-06	P		V	1	0.1		Azobenzene	103-33-3	5.6E+00	c	2.6E+01	c	9.1E-02	c	4.0E-01	c	1.2E-01	c		9.3E-04	c		
				5.00E-03	O					1			Azodicarbon																

Toxicity and Chemical-specific Information														Contaminant		Screening Levels										Protection of Groundwater SSLs		
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ⁻¹	k e y	RfD _a (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _s	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
				8.00E-03	I	6.00E-02	I	V		1		6.79E+02	Bromobenzene	108-86-1	2.9E+02	n	1.8E+03	ns	6.3E+01	n	2.6E+02	n	6.2E+01	n		4.2E-02	n	
6.20E-02	I	3.70E-05	C	8.00E-03	P	4.00E-02	X	V		1		4.04E+03	Bromochloromethane	74-97-5	1.5E+02	n	6.3E+02	n	4.2E+01	n	1.8E+02	n	8.3E+01	n		2.1E-02	n	
7.90E-03	I	1.10E-06	I	2.00E-02	I			V		1		9.15E+02	Bromodichloromethane	75-27-4	2.9E-01	c	1.3E+00	c	7.6E-02	c	3.3E-01	c	1.3E-01	c	8.0E+01(G)	3.6E-05	c	2.2E-02
				1.40E-03	I	5.00E-03	I	V		1		3.59E+03	Bromofom	75-25-2	1.9E+01	c*	8.6E+01	c	2.6E+00	c	1.1E+01	c	3.3E+00	c	8.0E+01(G)	8.7E-04	c	2.1E-02
				5.00E-03	H			V		1			Bromomethane	74-83-9	6.8E+00	n	3.0E+01	n	5.2E+00	n	2.2E+01	n	7.5E+00	n		1.9E-03	n	
		3.70E-06	C			1.00E-01	A	V		1		9.66E+02	Bromophos	2104-96-3	3.9E+02	n	5.8E+03	n					3.5E+01	n		1.5E-01	n	
										1			Bromopropane, 1-	106-94-5	1.6E+00	c	7.1E+00	c	7.6E-01	c	3.3E+00	c	1.5E+00	c		4.6E-04	c	
1.03E-01	O			1.50E-02	O					1	0.1		Bromoxynil	1689-84-5	6.3E+00	c	2.2E+01	c					6.1E-01	c		5.2E-04	c	
1.03E-01	O			1.50E-02	O					1			Bromoxynil Octanoate	1689-99-2	6.7E+00	c	3.2E+01	c					2.4E-01	c		2.1E-03	c	
6.00E-01	C	3.00E-05	I			2.00E-03	I	V		1		6.67E+02	Butadiene, 1,3-	106-99-0	7.6E-02	c*	3.3E-01	c*	9.4E-02	c*	4.1E-01	c*	7.1E-02	c*		3.9E-05	c*	
				1.00E-01	I			V		1		7.64E+03	Butanol, N-	71-36-3	7.8E+03	ns	1.2E+05	nms					2.0E+03	n		4.1E-01	n	
5.00E-04	I			4.00E-01	I	5.00E+00	I	V		1			Butyl Alcohol, t-	75-65-0	1.4E+03	c*	6.5E+03	c*	5.2E+03	n	2.2E+04	n	1.5E+02	c*		3.2E-02	c*	
				2.00E+00	P	3.00E+01	P	V		1		2.13E+04	Butyl alcohol, sec-	78-92-2	1.3E+05	nms	1.5E+06	nms	3.1E+04	n	1.3E+05	n	2.4E+04	n		5.0E+00	n	
				5.00E-02	I			V		1			Butylate	2008-41-5	3.9E+03	n	5.8E+04	n					4.6E+02	n		4.5E-01	n	
2.00E-04	C	5.70E-08	C							1	0.1		Butylated hydroxyanisole	25013-16-5	2.7E+03	c	1.1E+04	c	4.9E+01	c	2.2E+02	c	1.5E+02	c		2.9E-01	c	
3.60E-03	P			3.00E-01	P					1	0.1		Butylated hydroxytoluene	128-37-0	1.5E+02	c	6.4E+02	c					3.4E+00	c		1.0E-01	c	
				5.00E-02	P			V		1		1.08E+02	Butylbenzene, n-	104-51-8	3.9E+03	ns	5.8E+04	ns					1.0E+03	n		3.2E+00	n	
				1.00E-01	X			V		1		1.45E+02	Butylbenzene, sec-	135-98-8	7.8E+03	ns	1.2E+05	nms					2.0E+03	n		5.9E+00	n	
				1.00E-01	X			V		1		1.83E+02	Butylbenzene, tert-	98-06-6	7.8E+03	ns	1.2E+05	nms					6.9E+02	n		1.6E+00	n	
				2.00E-02	A					1	0.1		Cacodylic Acid	75-60-5	1.3E+03	n	1.6E+04	n					4.0E+02	n		1.1E-01	n	
		1.80E-03	I	1.00E-04	A	1.00E-05	A			0.025	0.001		Cadmium (Diet)	7440-43-9	7.1E+00	n	1.0E+02	n	1.6E-03	c**	6.8E-03	c**			5.0E+00	1.4E-01	n	3.8E-01
		1.80E-03	I	1.00E-04	A	1.00E-05	A			0.05	0.001		Cadmium (Water)	7440-43-9					1.6E-03	c**	6.8E-03	c**	1.8E+00	n				
				5.00E-01	I	2.20E-03	C			1	0.1		Caprolactam	105-60-2	3.1E+04	n	4.0E+05	nm	2.3E+00	n	9.6E+00	n	9.9E+03	n		2.5E+00	n	
				2.00E-03	I					1	0.1		Captafol	2425-06-1	3.6E+00	c*	1.5E+01	c	6.5E-02	c	2.9E-01	c	4.0E-01	c*		7.1E-04	c*	
2.30E-03	C	6.60E-07	C	1.30E-01	I					1	0.1		Captan	133-06-2	2.4E+02	c*	1.0E+03	c	4.3E+00	c	1.9E+01	c	3.1E+01	c*		2.2E-02	c*	
				1.00E-01	I					1	0.1		Carbaryl	63-25-2	6.3E+03	n	8.2E+04	n					1.8E+03	n		1.7E+00	n	
				5.00E-03	I					1	0.1		Carbofuran	1563-66-2	3.2E+02	n	4.1E+03	n					9.4E+01	n		3.7E-02	n	1.6E-02
				1.00E-01	I	7.00E-01	I	V		1		7.38E+02	Carbon Disulfide	75-15-0	2.7E+02	ns	3.5E+03	ns	7.3E+02	n	3.1E+03	n	8.1E+02	n		2.4E-01	n	
7.00E-02	I	6.00E-06	I	4.00E-03	I	1.00E-01	I	V		1		4.58E+02	Carbon Tetrachloride	56-23-5	6.5E-01	c	2.9E+00	c	4.7E-01	c	2.0E+00	c	4.6E-01	c	5.0E+00	1.8E-04	c	1.9E-03
				1.00E-01	P	V				1		5.89E+03	Carbonyl Sulfide	463-58-1	6.7E+01	c	2.8E+02	n	1.0E+02	n	4.4E+02	n	2.1E+02	n		5.1E-01	n	
				1.00E-02	I					1	0.1		Carbosulfan	55285-14-8	6.3E+02	n	8.2E+03	n					5.1E+01	n		1.2E+00	n	
				1.00E-01	I					1	0.1		Carboxin	5234-68-4	6.3E+03	n	8.2E+04	n					1.9E+03	n		1.0E+00	n	
						9.00E-04	I			1			Ceric oxide	1306-38-3	1.3E+06	nm	5.4E+06	nm	9.4E-01	n	3.9E+00	n				4.0E-01	n	
				1.00E-01	I			V		1			Chloral Hydrate	302-17-0	7.8E+03	n	1.2E+05	nm					2.0E+03	n		4.0E-01	n	
				1.50E-02	I					1	0.1		Chloramben	133-90-4	9.5E+02	n	1.2E+04	n					2.9E+02	n		7.0E-02	n	
4.03E-01	H									1	0.1		Chloramines, Organic	E701235											4.0E+03(G)	1.5E-04	c	
										1	0.1		Chloranil	118-75-2	1.3E+00	c	5.7E+00	c					1.8E-01	c		1.5E-04	c	
				5.00E-04	G			V		1	0.04		Chlordane (alpha)	5103-71-9	3.6E+01	n	5.0E+02	n					3.6E+00	n		4.9E-01	n	
3.50E-01	I	1.00E-04	I	5.00E-04	I	7.00E-04	I	V		1	0.04		Chlordane (gamma)	5103-74-2	3.6E+01	n	5.0E+02	n					1.0E+01	n		1.4E+00	n	
				5.00E-04	I					1	0.04		Chlordane (technical mixture)	12789-03-6	1.7E+00	c*	7.7E+00	c*	2.8E-02	c*	1.2E-01	c*	2.0E-02	c*	2.0E+00	2.7E-03	c*	2.7E-01
1.00E+01	I	4.60E-03	C	3.00E-04	I					1	0.1		Chlordecone (Kepone)	143-50-0	5.4E-02	c	2.3E-01	c	6.1E-04	c	2.7E-03	c	3.5E-03	c		1.2E-04	c	
				7.00E-04	A					1	0.1		Chlorfeniphos	470-90-6	4.4E+01	n	5.7E+02	n					1.1E+01	n		3.1E-02	n	
				9.00E-02	O					1	0.1		Chlorimuron, Ethyl-	90982-32-4	5.7E+03	n	7.4E+04	n					1.8E+03	n		6.0E-01	n	
				1.00E-01	I	1.45E-04	A	V		1		2.78E+03	Chlorine	7782-50-5	1.8E-01	n	7.8E-01	n	1.5E-01	n	6.4E-01	n	3.0E-01	n	4.0E+03(G)	1.5E-04	n	2.0E+00
				3.00E-02	I	2.00E-04	I	V		1			Chlorine Dioxide	10049-04-4	2.3E+03	n	3.4E+04	n	2.1E-01	n	8.8E-01	n	4.2E-01	n	8.0E+02(G)			
				3.00E-02	I					1			Chlorite (Sodium Salt)	7758-19-2	2.3E+03	n	3.5E+04	n										

Toxicity and Chemical-specific Information														Contaminant		Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³ -y) ¹	k e y	RfD _c (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	V o l u t a g e n	GIABS	ABS _s	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)		
1.60E-01	I	1.10E-02	I	1.50E+00	I	3.00E-05	I	M	0.013			Chromium(III), Insoluble Salts	16065-83-1	1.2E+05	nm	1.8E+06	nm					2.2E+04	n		4.0E+07	n			
				9.00E-04	I				0.025			Chromium(VI)	18540-29-9	9.5E-01	c*	2.0E+01	c*	9.2E-05	c	1.1E-03	c	1.1E-01	c		2.1E-03	c			
				1.30E-02	I				0.013	0.1		Chromium, Total	7440-47-3																
		9.00E-03	P	3.00E-04	P	6.00E-06	P					Clofentazine	74115-24-5	8.2E+02	n	1.1E+04	n					2.3E+02	n		1.4E+01	n	1.8E+05		
		6.20E-04	I					V M				Cobalt	7440-48-4	2.3E+01	n	3.5E+02	n	3.1E-04	c*	1.4E-03	c*	6.0E+00	n		2.7E-01	n			
				4.00E-02	H							Coke Oven Emissions	E649830					1.6E-03	c	2.0E-02	c								
				5.00E-02	I	6.00E-01	C			0.1		Copper	7440-50-8	3.1E+03	n	4.7E+04	n					8.0E+02	n	1.3E+03	2.8E+01	n	4.6E+01		
				5.00E-02	I	6.00E-01	C					Cresol, m-	108-39-4	3.2E+03	n	4.1E+04	n	6.3E+02	n	2.6E+03	n	9.3E+02	n		7.4E-01	n			
				5.00E-02	I	6.00E-01	C			0.1		Cresol, o-	95-48-7	3.2E+03	n	4.1E+04	n	6.3E+02	n	2.6E+03	n	9.3E+02	n		7.5E-01	n			
				2.00E-02	P	6.00E-01	C			0.1		Cresol, p-	106-44-5	1.3E+03	n	1.6E+04	n	6.3E+02	n	2.6E+03	n	3.7E+02	n		3.0E-01	n			
				1.00E-01	A					0.1		Cresol, p-chloro-m-	59-50-7	6.3E+03	n	8.2E+04	n					1.4E+03	n		1.7E+00	n			
1.90E+00	H			1.00E-01	A	6.00E-01	C			0.1		Cresols	1319-77-3	6.3E+03	n	8.2E+04	n	6.3E+02	n	2.6E+03	n	1.5E+03	n		1.3E+00	n			
				1.00E-03	P			V			1.66E+04	Crotonaldehyde, trans-	123-73-9	3.7E-01	c	1.7E+00	c					4.0E-02	c		8.2E-06	c			
				1.00E-01	I	4.00E-01	I	V			2.68E+02	Cumene	98-82-8	1.9E+03	ns	9.9E+03	ns	4.2E+02	n	1.8E+03	n	4.5E+02	n		7.4E-01	n			
2.20E-01	C	6.30E-05	C							0.1		Cupferron	135-20-6	2.5E+00	c	1.0E+01	c	4.5E-02	c	1.9E-01	c	3.5E-01	c		6.1E-04	c			
8.40E-01	H			2.00E-03	H					0.1		Cyanazine	21725-46-2	6.5E-01	c	2.7E+00	c					8.8E-02	c		4.1E-05	c			
				1.00E-03	I	9.00E-03	C					~Calcium Cyanide	592-01-8	7.8E+01	n	1.2E+03	n	9.4E+00	n	3.9E+01	n	2.0E+01	n						
				5.00E-03	I							~Copper Cyanide	544-92-3	3.9E+02	n	5.8E+03	n					1.0E+02	n						
				6.00E-04	I	8.00E-04	G V				9.54E+05	~Cyanide (CN-)	57-12-5	2.4E+01	n	1.6E+02	n	8.3E-01	n	3.5E+00	n	1.5E+00	n	2.0E+02	1.5E-02	n	2.0E+00		
				1.00E-03	I			V				~Cyanogen	460-19-5	7.8E+01	n	1.2E+03	n					2.0E+01	n						
				9.00E-02	I			V				~Cyanogen Bromide	506-68-3	7.0E+03	n	1.1E+05	nm					1.8E+03	n						
				5.00E-02	I			V				~Cyanogen Chloride	506-77-4	3.9E+03	n	5.8E+04	n					1.0E+03	n						
				6.00E-04	I	8.00E-04	I V				1.00E+07	~Hydrogen Cyanide	74-90-8	2.3E+01	n	1.5E+02	n	8.3E-01	n	3.5E+00	n	1.5E+00	n		1.5E-02	n			
				2.00E-03	I	9.00E-03	C					~Potassium Cyanide	151-50-8	1.6E+02	n	2.3E+03	n	9.4E+00	n	3.9E+01	n	4.0E+01	n						
				5.00E-03	I					0.04		~Potassium Silver Cyanide	506-61-6	3.9E+02	n	5.8E+03	n					8.2E+01	n						
				1.00E-01	I					0.04		~Silver Cyanide	506-64-9	7.8E+03	n	1.2E+05	nm					1.8E+03	n						
				1.00E-03	I	9.00E-03	C					~Sodium Cyanide	143-33-9	7.8E+01	n	1.2E+03	n	9.4E+00	n	3.9E+01	n	2.0E+01	n	2.0E+02					
				5.00E-02	I							~Zinc Cyanide	557-21-1	3.9E+03	n	5.8E+04	n					1.0E+03	n						
2.00E-02	X			2.00E-02	X	6.00E+00	I V			0.1	1.17E+02	Cyclohexane	110-82-7	6.5E+03	ns	2.7E+04	ns	6.3E+03	n	2.6E+04	n	1.3E+04	n		1.3E+01	n			
				5.00E+00	I	7.00E-01	P V				5.11E+03	Cyclohexane, 1,2,3,4,5-pentabromo-6-chloro-	87-84-3	2.7E+01	c*	1.1E+02	c					2.8E+00	c		1.6E-02	c			
												Cyclohexanone	108-94-1	2.8E+04	ns	1.3E+05	nms	7.3E+02	n	3.1E+03	n	1.4E+03	n		3.4E-01	n			
				5.00E-03	P	1.00E+00	X V				2.83E+02	Cyclohexene	110-83-8	3.1E+02	ns	3.1E+03	ns	1.0E+03	n	4.4E+03	n	7.0E+01	n		4.6E-02	n			
				2.00E-01	I			V			2.93E+05	Cyclohexylamine	108-91-8	1.6E+04	n	2.3E+05	nm					3.8E+03	n		1.0E+00	n			
				2.50E-02	I					0.1		Cyfluthrin	68359-37-5	1.6E+03	n	2.1E+04	n					1.2E+02	n		3.1E+01	n			
				5.00E-01	O					0.1		Cyromazine	66215-27-8	3.2E+04	n	4.1E+05	nm					9.9E+03	n	2.0E+02	2.5E+00	n			
1.80E-02	C	5.10E-06	C	3.00E-02	I					0.1		Dalapon	75-99-0	1.9E+03	n	2.5E+04	n					6.0E+02	n		1.2E-01	n	4.1E-02		
				1.50E-01	I					0.1		Daminozide	1596-84-5	3.0E+01	c	1.3E+02	c	5.5E-01	c	2.4E+00	c	4.3E+00	c		9.5E-04	c			
7.00E-04	I			7.00E-03	I					0.1		Decabromodiphenyl ether, 2,2',3,3',4,4',5,5',6,6'-(BDE-209)	1163-19-5	4.4E+02	n	3.3E+03	c**					1.1E+02	c**		6.2E+01	c**			
				4.00E-05	I					0.1		Demeton	8065-48-3	2.5E+00	n	3.3E+01	n					4.2E-01	n						
1.20E-03	I			6.00E-01	I					0.1		Di(2-ethylhexyl)adipate	103-23-1	4.5E+02	c*	1.9E+03	c					6.5E+01	c	4.0E+02	4.7E+00	c	2.9E+01		
6.10E-02	H									0.1		Diallate	2303-16-4	8.9E+00	c	3.8E+01	c					5.4E-01	c		8.0E-04	c			
				7.00E-04	A					0.1		Diazinon	333-41-5	4.4E+01	n	5.7E+02	n					1.0E+01	n		6.5E-02	n			
8.00E-01	P	6.00E-03	P	2.00E-04	I V	M					9.79E+02	Dibromo-3-chloropropane, 1,2-	96-12-8	5.3E-03	c	6.4E-02	c	1.7E-04	c	2.0E-03	c	3.3E-04	c	2.0E-01	1.4E-07	c	8.6E-05		
2.50E-01	C			3.00E-04	C					0.1		Dibromoacetic acid	631-64-1	2.2E+00	c**	9.2E+00	c*					3.1E-01	c*	6.0E+01(G)	6.3E-05	c*	1.2E-02		
				4.00E-04	X			V			1.59E+02	Dibromobenzene, 1,3-	108-36-1	3.1E+01	n	4.7E+02	ns					5.3E+00	n		5.1E-03	n			
				1.00E-02	I			V				Dibromobenzene, 1,4-	106-37-6	7.8E+02	n	1.2E+04	n					1.3E+02	n		1.2E-01	n			
8.40E-02	I			2.00E-02	I			V			8.02E+02	Dibromochloromethane	124-48-1	8.3E+00	c	3.9E+01	c					8.7E-01	c	8.0E+01(G)	2.3E-04	c	2.1E-02		
2.00E+00	I	6.00E-04	I	9.00E-03	I	9.00E-03	I V				1.34E+03	Dibromoethane, 1,2-	106-93-4	3.6E-02	c	1.6E-01	c	4.7E-03	c	2.0E-02	c	7.5E-03	c	5.0E-02	2.1E-06	c	1.4E-05		
				4.																									

Toxicity and Chemical-specific Information														Contaminant		Screening Levels												Protection of Groundwater SSLs																										
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³ -y) ¹	k e y	RfD _a (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)																										
3.00E-04	C			2.00E-03	P	5.00E-03	I				1	0.1	Diesel Engine Exhaust	E17136615	1.3E+02	n	1.6E+03	n	9.4E-03	c	4.1E-02	c				8.1E-03	n																											
				3.00E-02	P	1.00E-04	P		1	0.1	Diethanolamine	111-42-2	1.9E+03	n	2.4E+04	n	2.1E-01	n	8.8E-01	n	4.0E+01	n		1.3E-01	n																													
				6.00E-02	P	3.00E-04	P		1	0.1	Diethylene Glycol Monobutyl Ether	112-34-5	3.8E+03	n	4.8E+04	n	1.0E-01	n	4.4E-01	n	6.0E+02	n		2.4E-01	n																													
				1.00E-03	P			V		1	0.1	Diethylene Glycol Monoethyl Ether	111-90-0	7.8E+01	n	1.2E+03	n	3.1E-01	n	1.3E+00	n	1.2E+03	n		4.1E-03	n																												
3.50E+02	C	1.00E-01	C	8.30E-02	O					1	0.1	Diethylformamide	617-84-5	1.6E-03	c	6.6E-03	c	2.8E-05	c	1.2E-04	c	5.1E-05	c		2.8E-05	c																												
				2.00E-02	I				1	0.1	Diethylstilbestrol	56-53-1	5.2E+03	n	6.8E+04	n					1.7E+03	n		2.6E+02	n																													
						4.00E+01	I	V			1	1.43E+03	Difluorozurion	43222-48-6	1.3E+03	n	1.6E+04	n					2.9E+02	n		3.3E-01	n																											
						3.00E+01	X	V			1	6.91E+02	Difluoroethane, 1,1-	75-37-6	4.8E+04	ns	2.0E+05	nms	4.2E+04	n	1.8E+05	n		2.8E+01	n																													
4.40E-02	C	1.30E-05	C			7.00E-01	P	V				1	2.26E+03	Dihydropropane, 2,2-	420-45-1	2.4E+04	ns	1.0E+05	ns	3.1E+04	n	1.3E+05	n	6.3E+04	n		1.4E+02	n																										
									1		94-58-6	Dihydrosofrole	94-58-6	9.9E+00	c	4.5E+01	c	2.2E-01	c	9.4E-01	c	3.0E-01	c		1.9E-04	c																												
									1		108-20-3	Diisopropyl Ether	108-20-3	2.2E+03	n	9.4E+03	ns	7.3E+02	n	3.1E+03	n	1.5E+03	n		3.7E-01	n																												
				8.00E-02	I			V			1	5.30E+02	Diisopropyl Methylphosphonate	1445-75-6	6.3E+03	ns	9.3E+04	ns					1.6E+03	n		4.5E-01	n																											
1.60E+00	P			2.18E-02	O					1	0.1	Dimethipin	55290-64-7	1.4E+03	n	1.8E+04	n					4.4E+02	n		9.6E-02	n																												
				2.20E-03	O				1	0.1	Dimethoate	60-51-5	1.4E+02	n	1.8E+03	n					4.4E+01	n		9.9E-03	n																													
						2.00E-02	X	2.00E-04	X	V	M		1	0.1	Dimethoxybenzidine, 3,3'-	119-90-4	7.6E-02	c	1.4E+00	c					1.5E-02	c		1.9E-05	c																									
						6.00E-02	P				1	0.1	Dimethyl Sulfide	75-18-3	6.2E-01	n	2.6E+00	n	2.1E-01	n	8.8E-01	n	4.2E-01	n		1.0E-04	n																											
1.70E-03	P									1	0.1	Dimethyl methylphosphonate	756-79-6	3.2E+02	c*	1.4E+03	c*					4.6E+01	c*		9.6E-03	c*																												
									1	0.1	Dimethylamino azobenzene [p-]	60-11-7	1.2E-01	c	5.0E-01	c	2.2E-03	c	9.4E-03	c	5.0E-03	c		2.1E-05	c																													
									1	0.1	Dimethylaniline HCl, 2,4-	21436-96-4	9.4E-01	c	4.0E+00	c					1.3E-01	c		1.2E-04	c																													
						2.00E-03	X				1	0.1	Dimethylaniline, 2,4-	95-68-1	2.7E+00	c*	1.1E+01	c					3.7E-01	c		2.1E-04	c																											
2.70E-02	P			2.00E-03	I			V				1	8.30E+02	Dimethylaniline, N,N-	121-69-7	2.6E+01	c**	1.2E+02	c*					2.5E+00	c*		9.0E-04	c*																										
									1	0.1	Dimethylbenzidine, 3,3'-	119-93-7	1.1E-02	c	2.1E-01	c					2.1E-03	n		1.4E-05	c																													
						1.00E-01	P	3.00E-02	I	V			1	1.06E+05	Dimethylformamide	68-12-2	2.6E+03	n	1.5E+04	n	3.1E+01	n	1.3E+02	n	6.1E+01	n		1.2E-02	n																									
						1.00E-04	X	2.00E-06	X	V			1	1.72E+05	Dimethylhydrazine, 1,1-	57-14-7	5.7E-02	n	2.4E-01	n	2.1E-03	n	8.8E-03	n	4.2E-03	n		9.3E-07	n																									
5.50E+02	C	1.60E-01	C							1		1.89E+05	Dimethylhydrazine, 1,2-	540-73-8	8.8E-04	c	4.1E-03	c	1.8E-05	c	7.7E-05	c	2.8E-05	c		6.5E-09	c																											
						2.00E-02	I				1	0.1	Dimethylphenol, 2,4-	105-67-9	1.3E+03	n	1.6E+04	n					3.6E+02	n		4.2E-01	n																											
						6.00E-04	I				1	0.1	Dimethylphenol, 2,6-	576-26-1	3.8E+01	n	4.9E+02	n					1.1E+01	n		1.3E-02	n																											
						1.00E-03	I				1	0.1	Dimethylphenol, 3,4-	95-65-8	6.3E+01	n	8.2E+02	n					1.8E+01	n		2.1E-02	n																											
4.50E-02	C	1.30E-05	C					V				1	4.73E+02	Dimethylvinylchloride	513-37-1	1.1E+00	c	4.8E+00	c	2.2E-01	c	9.4E-01	c	3.3E-01	c		1.1E-04	c																										
						8.00E-05	X				1	0.1	Dinitro-o-cresol, 4,6-	534-52-1	5.1E+00	n	6.6E+01	n					1.5E+00	n		2.6E-03	n																											
						2.00E-03	I				1	0.1	Dinitro-o-cyclohexyl Phenol, 4,6-	131-89-5	1.3E+02	n	1.6E+03	n					2.3E+01	n		7.7E-01	n																											
						4.00E-04	X	2.00E-03	X		1	0.1	Dinitroaniline, 3,5-	618-87-1	2.5E+01	n	3.3E+02	n	2.1E+00	n	8.8E+00	n	7.7E+00	n		4.1E-03	n																											
6.80E-01	I	C	8.90E-05	C	2.00E-03	I					0.102																																											
																																1.00E-04	P				1	0.1	Dinitrobenzene, 1,2-	528-29-0	6.3E+00	n	8.2E+01	n					1.9E+00	n		1.8E-03	n	
																																1.00E-04	I				1	0.1	Dinitrobenzene, 1,3-	99-65-0	6.3E+00	n	8.2E+01	n					2.0E+00	n		1.8E-03	n	
																																1.00E-04	P				1	0.1	Dinitrobenzene, 1,4-	100-25-4	6.3E+00	n	8.2E+01	n					2.0E+00	n		1.8E-03	n	
1.50E+00	P			2.00E-03	I								1	0.1	Dinitrophenol, 2,4-	51-28-5	1.3E+02	n	1.6E+03	n					3.9E+01	n		4.4E-02	n																									
									1	0.1	Dinitrotoluene Mixture, 2,4/2,6-	E1615210	8.0E-01	c	3.4E+00	c					1.1E-01	c		1.5E-04	c																													
						1.00E-04	X				1	0.099	Dinitrotoluene, 2,4-	121-14-2	1.7E+00	c*	7.4E+00	c	3.2E-02	c	1.4E-01	c	2.4E-01	c		3.2E-04	c																											
						3.00E-04	X				1	0.006	Dinitrotoluene, 2,6-	606-20-2	3.6E-01	c*	1.5E+00	c					4.9E-02	c		6.7E-05	c																											
4.50E-01	X			1.00E-04	X								1	0.009	Dinitrotoluene, 2-Amino-4,6-	35572-78-2	7.7E+00	n	1.1E+02	n					1.9E+00	n		1.5E-03	n																									
						1.00E-04	X				1	0.009	Dinitrotoluene, 4-Amino-2,6-	19406-51-0	7.7E+00	n	1.1E+02	n					1.9E+00	n		1.5E-03	n																											
						9.00E-04	X				1	0.1	Dinitrotoluene, Technical grade	25321-14-6	1.2E+00	c*	5.1E+00	c					1.0E-01	c		1.4E-04	c																											
						1.00E-03	I				1	0.1	Dinoseb	88-85-7	6.3E+01	n	8.2E+02	n					1.5E+01	n		1.3E-01	n	6.2E-02																										
1.00E-01	I	5.00E-06	I	3.00E-02	I	3.00E-02	I	V				1	1.16E+05	Dioxane, 1,4-	123-91-1	5.3E+00	c	2.4E+01	c	5.6E-01	c*	2.5E+00	c*	4.6E-01	c		9.4E-05	c																										
6.20E+03	I	1.30E+00	I	7.00E-10	I	4.00E-08	C	V				0.03																																										
																																3.00E-02	I				1	0.1	Dioxins	34465-46-8	1													

Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs				
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ⁻¹	k e y	RfD _d (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
1.10E-02	C	2.50E-06	C	5.00E-02	P	1.00E+00	I	V		1		0.1	4.80E+02	Ethylbenzene	100-41-4	5.8E+00	c	2.5E+01	c	1.1E+00	c	4.9E+00	c	1.5E+00	c	7.0E+02	1.7E-03	c	7.8E-01
				7.00E-02	P					1		0.1		Ethylene Cyanohydrin	109-78-4	4.4E+03	n	5.7E+04	n					1.4E+03	n		2.8E-01	n	
				9.00E-02	P			V		1			1.89E+05	Ethylene Diamine	107-15-3	7.0E+03	n	1.1E+05	nm					1.8E+03	n		4.1E-01	n	
				8.00E-01	A	4.00E-01	C			1		0.1		Ethylene Glycol	107-21-1	5.1E+04	n	6.6E+05	nm	4.2E+02	n	1.8E+03	n	1.6E+04	n		3.2E+00	n	
3.10E-01	C	3.00E-03	I	1.00E-01	I	1.60E+00	I			1		0.1		Ethylene Glycol Monobutyl Ether	111-76-2	6.3E+03	n	8.2E+04	n	1.7E+03	n	7.0E+03	n	2.0E+03	n		4.1E-01	n	
4.50E-02	C	1.30E-05	C	8.00E-05	I	3.00E-02	C	V	M	1		0.1	1.21E+05	Ethylene Oxide	75-21-8	2.0E+03	c	2.5E-02	c	3.4E-04	c	4.1E-03	c	6.7E-04	c		1.4E-07	c	
6.50E+01	C	1.90E-02	C							1				Ethylene Thiourea	98-45-7	5.1E+00	n	5.1E+01	c**	2.2E-01	c	9.4E-01	c	1.6E+00	n		3.6E-04	n	
				3.00E+00	I			V		1		0.1	1.54E+05	Ethyleneimine	151-56-4	2.7E-03	c	1.2E-02	c	1.5E-04	c	6.5E-04	c	2.4E-04	c		5.2E-08	c	
				2.50E-04	I					1		0.1		Ethylphthalyl Ethyl Glycolate	84-72-0	1.9E+05	nm	2.5E+06	nm					5.8E+04	n		1.3E+02	n	
				2.50E-02	I					1		0.1		Fenamiphos	22224-92-6	1.6E+01	n	2.1E+02	n					4.4E+00	n		4.3E-03	n	
				2.50E-02	I					1		0.1		Fenpropathrin	39515-41-8	1.6E+03	n	2.1E+04	n					6.4E+01	n		2.9E+00	n	
				2.50E-02	I					1		0.1		Fenvalerate	51630-58-1	1.6E+03	n	2.1E+04	n					5.0E+02	n		3.2E+02	n	
				1.30E-02	I					1		0.1		Fluometuron	2164-17-2	8.2E+02	n	1.1E+04	n					2.4E+02	n		1.9E-01	n	
				4.00E-02	C	1.30E-02	C			1				Fluoride	16984-48-8	3.1E+03	n	4.7E+04	n	1.4E+01	n	5.7E+01	n	8.0E+02	n	4.0E+03	1.2E+02	n	6.0E+02
				6.00E-02	I	1.30E-02	C			1				Fluorine (Soluble Fluoride)	7782-41-4	4.7E+03	n	7.0E+04	n	1.4E+01	n	5.7E+01	n	1.2E+03	n	4.0E+03	1.8E+02	n	6.0E+02
				8.00E-02	I					1		0.1		Fluridone	59756-60-4	5.1E+03	n	6.6E+04	n					1.4E+03	n		1.6E+02	n	
				4.00E-02	O					1		0.1		Flurprimidol	56425-91-3	2.5E+03	n	3.3E+04	n					6.9E+02	n		3.1E+00	n	
				2.00E-03	O					1		0.1		Flusilazole	85509-19-9	1.3E+02	n	1.6E+03	n					3.1E+01	n		5.1E+00	n	
				5.00E-01	O					1		0.1		Flutolanil	66332-96-5	3.2E+04	n	4.1E+05	nm					7.9E+03	n		4.2E+01	n	
				1.00E-02	I					1		0.1		Fluvalinate	69409-94-5	6.3E+02	n	8.2E+03	n					2.0E+02	n		2.9E+02	n	
				9.00E-02	O					1		0.1		Folpet	133-07-3	5.7E+03	n	7.4E+04	n					1.6E+03	n		3.9E-01	n	
				1.00E-02	O					1		0.1		Fomesafen	72178-02-0	6.3E+02	n	8.2E+03	n					1.9E+02	n		6.3E-01	n	
2.10E-02	C	7.40E-06	I	2.00E-03	I	7.00E-03	I	V	M	1		0.1	4.24E+04	Fonofos	944-22-9	1.3E+02	n	1.6E+03	n					2.4E+01	n		4.7E-02	n	
				2.00E-01	I	7.00E-03	I	V		1			1.06E+05	Formaldehyde	50-00-0	4.3E+00	c	7.0E+01	c*	1.4E-01	c*	1.7E+00	c*	2.2E-01	c*		4.5E-05	c*	
				9.00E-01	P	3.00E-04	X	V		1				Formic Acid	64-18-6	2.9E+01	n	1.2E+02	n	3.1E-01	n	1.3E+00	n	6.3E-01	n		1.3E-04	n	
				2.50E+00	O					1		0.1		Fosetyl-AL	39148-24-8	1.6E+05	nm	2.1E+06	nm					5.0E+04	n		6.6E+02	n	
				1.00E-03	X			V		1				Furans	132-64-9	7.8E+01	n	1.2E+03	n					7.9E+00	n		1.5E-01	n	
				1.00E-03	I			V		1		6.22E+03	-Furan	110-00-9	7.8E+01	n	1.2E+03	n					1.9E+01	n		7.3E-03	n		
				9.00E-01	I	2.00E+00	I	V		1		1.65E+05	~Tetrahydrofuran	109-99-9	1.8E+04	n	9.5E+04	n	2.1E+03	n	8.8E+03	n	3.4E+03	n		7.5E-01	n		
3.80E+00	H									1		0.1		Furazolidone	67-45-8	1.4E-01	c	6.0E-01	c					2.0E-02	c		3.9E-05	c	
				3.00E-03	I	5.00E-02	H	V		1			1.01E+04	Furfural	98-01-1	2.1E+02	n	2.6E+03	n	5.2E+01	n	2.2E+02	n	3.8E+01	n		8.1E-03	n	
1.50E+00	C	4.30E-04	C							1		0.1		Furium	531-82-8	3.6E-01	c	1.5E+00	c	6.5E-03	c	2.9E-02	c	5.1E-02	c		6.8E-05	c	
3.00E-02	I	8.60E-06	C							1		0.1		Furmecyclox	60568-05-0	1.8E+01	c	7.7E+01	c	3.3E-01	c	1.4E+00	c	1.1E+00	c		1.2E-03	c	
				6.00E-03	O					1		0.1		Glufosinate, Ammonium	77182-82-2	3.8E+02	n	4.9E+03	n					1.2E+02	n		2.6E-02	n	
				1.00E-01	A	8.00E-05	C			1		0.1		Glutaraldehyde	111-30-8	6.0E+03	n	7.0E+04	n	8.3E-02	n	3.5E-01	n	2.0E+03	n		4.0E-01	n	
				4.00E-04	I	1.00E-03	X	V		1			1.06E+05	Glycidaldehyde	765-34-4	2.3E+01	n	2.1E+02	n	1.0E+00	n	4.4E+00	n	1.7E+00	n		3.3E-04	n	
				1.00E-01	I			V		1		0.1		Glyphosate	1071-83-6	6.3E+03	n	8.2E+04	n					2.0E+03	n	7.0E+02	8.8E+00	n	3.1E+00
				1.00E-02	X					1				Guanidine	113-00-8	7.8E+02	n	1.2E+04	n					2.0E+02	n		4.5E-02	n	
				2.00E-02	P					1		0.1		Guanidine Chloride	50-01-1	1.3E+03	n	1.6E+04	n					4.0E+02	n				
				3.00E-02	X					1		0.1		Guanidine Nitrate	506-93-4	1.9E+03	n	2.5E+04	n					6.0E+02	n		1.5E-01	n	
4.50E+00	I	1.30E-03	I	5.00E-05	I					1		0.1		Haloxypol, Methyl	69806-40-2	3.2E+00	n	4.1E+01	n					7.6E-01	n		8.4E-03	n	
9.10E+00	I	2.60E-03	I	1.00E-04	A			V		1				Heptachlor	76-44-8	1.3E-01	c*	6.3E-01	c	2.2E-03	c	9.4E-03	c	1.4E-03	c	4.0E-01	1.2E-04	c	3.3E-02
				1.30E-05	I			V		1			2.09E+02	Heptachlor Epoxide	1024-57-3	7.0E-02	c*	3.3E-01	c*	1.1E-03	c	4.7E-03	c	1.4E-03	c*	2.0E-01	2.8E-05	c*	4.1E-03
				3.00E-04	X	4.00E-01	P	V		1		5.79E+01	Heptanal, n-	111-71-7	2.4E+01	n	1.0E+02	n	3.1E+00	n	1.3E+01	n	6.3E+00	n		1.4E-03	n		
														Heptane, N-	142-82-5	2.2E+01	n	2.9E+02	ns	4.2E+02	n	1.8E+03	n	6.0E+00	n		4.8E-02	n	
				2.00E-03	I			V		1				Hexabromobenzene	87-82-1	1.6E+02													

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = Wt; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																														
Toxicity and Chemical-specific Information												Contaminant		Screening Levels										Protection of Groundwater SSLs						
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD _a (mg/kg-day)	k e y	RfC ₁ (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _g	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)		
9.50E-04	I			1.00E-02	A						1		Iodine	7553-56-2	7.8E+02	n	1.2E+04	n					2.0E+02	n		1.2E+01	n			
				4.00E-02	I						1	0.1	Iprodione	36734-19-7	2.5E+03	n	3.3E+04	n					7.4E+02	n		2.2E-01	n			
				7.00E-01	P							1		Iron	7439-89-6	5.5E+04	n	8.2E+05	nm					1.4E+04	n		3.5E+02	n		
				3.00E-01	I	4.00E-01	X	V				1		Isobutyl Alcohol	78-83-1	7.8E+03	n	4.3E+04	ns	4.2E+02	n	1.8E+03	n	7.3E+02	n		1.5E-01	n		
				2.00E-01	I	2.00E+00	C					1	0.1	Isophorone	78-59-1	5.7E+02	c*	2.4E+03	c*	2.1E+03	n	8.8E+03	n	7.8E+01	c*		2.6E-02	c*		
				1.50E-02	I				V			1		Isopropanol	33820-53-0	1.2E+03	n	1.8E+04	n					4.0E+01	n		9.2E-01	n		
				2.00E+00	P	2.00E-01	P	V				1		Isopropanol	67-63-0	5.6E+03	n	2.4E+04	n	2.1E+02	n	8.8E+02	n	4.1E+02	n		8.4E-02	n		
				1.00E-01	I							1	0.1	Isopropyl Methyl Phosphonic Acid	1832-54-8	6.3E+03	n	8.2E+04	n					2.0E+03	n		4.3E-01	n		
				4.00E-03	X	4.00E-02	X	V				1		1.62E+02	Isopropyltoluene, p-	99-87-6	1.7E+02	ns	1.1E+03	ns	4.2E+01	n	1.8E+02	n	2.1E+01	n		5.2E-02	n	
				5.00E-02	I							1	0.1	Isosaxaben	82558-50-7	3.2E+03	n	4.1E+04	n					7.3E+02	n		2.0E+00	n		
						3.00E-01	A	V			1		Jet propulsion fuel 7 (JP-7)	E1737665	4.3E+08	nm	1.8E+09	nm	3.1E+02	n	1.3E+03	n	6.3E+02	n						
				8.00E-03	O						1	0.1	Lactofen	77501-63-4	5.1E+02	n	6.6E+03	n					1.0E+02	n		4.6E+00	n			
				2.00E-04	X						1	0.1	Lactonitrile	78-97-7	1.3E+01	n	1.6E+02	n					4.0E+00	n		8.1E-04	n			
				5.00E-05	P						1		Lanthanum	7439-91-0	3.9E+00	n	5.8E+01	n					1.0E+00	n						
				2.08E-05	P						1	0.1	Lanthanum Acetate Hydrate	100587-90-4	1.3E+00	n	1.7E+01	n					4.2E-01	n						
				1.87E-05	P						1		Lanthanum Chloride Heptahydrate	10025-84-0	1.5E+00	n	2.2E+01	n					3.7E-01	n						
				2.83E-05	P						1		Lanthanum Chloride, Anhydrous	10099-58-8	2.2E+00	n	3.3E+01	n					5.7E-01	n						
				1.60E-05	P						1		Lanthanum Nitrate Hexahydrate	10277-43-7	1.3E+00	n	1.9E+01	n					3.2E-01	n						
				8.50E-03	C	1.20E-05	C					1		Lead Compounds		8.2E+01	c	3.8E+02	c	2.3E-01	c	1.0E+00	c	9.1E+00	c					
				2.10E-01	C	8.00E-05	C					1	0.1	~Lead Phosphate	7446-27-7	2.6E+00	c	1.1E+01	c	3.5E-02	c	1.5E-01	c	3.7E-01	c		1.0E+01	7.5E-05	c	9.0E+00
										1			~Lead and Compounds	7439-92-1	2.0E+02	G	8.0E+02	G	1.5E-01	G			1.0E+01	G						
								1					~Lead and Compounds (with other sources of lead present, see Guidance)	7439-92-1	1.0E+02	G														
				3.80E-02	C	1.10E-05	C				1	0.1	~Lead subacetate	1335-32-6	1.4E+01	c	6.0E+01	c	2.6E-01	c	1.1E+00	c	2.1E+00	c		4.5E-04	c			
				1.00E-07	I				V		1		~Tetraethyl Lead	78-00-2	7.8E+03	n	1.2E+01	n					1.3E-03	n		4.7E-06	n			
				5.00E-06	P				V		1		Lewisite	541-25-3	3.9E-01	n	5.8E+00	n					9.0E-02	n		3.8E-05	n			
				7.70E-03	O						1	0.1	Linuron	330-55-2	4.9E+02	n	6.3E+03	n					1.3E+02	n		1.1E-01	n			
				2.00E-03	P						1		Lithium	7439-93-2	1.6E+02	n	2.3E+03	n					4.0E+01	n		1.2E+01	n			
				5.00E-04	I						1	0.1	MCPA	94-74-6	3.2E+01	n	4.1E+02	n					7.5E+00	n		2.0E-03	n			
				4.40E-02	O						1	0.1	MCPB	94-81-5	2.8E+03	n	3.6E+04	n					6.5E+02	n		2.6E-01	n			
				1.00E-03	I						1	0.1	MCPB	93-65-2	6.3E+01	n	8.2E+02	n					1.6E+01	n		4.7E-03	n			
				2.00E-02	I					1	0.1	Malathion	121-75-5	1.3E+03	n	1.6E+04	n					3.9E+02	n		1.0E-01	n				
				1.00E-01	I	7.00E-04	C			1	0.1	Maleic Anhydride	108-31-6	6.3E+03	n	8.0E+04	n	7.3E-01	n	3.1E+00	n	1.9E+03	n		3.8E-01	n				
				5.00E-01	I					1	0.1	Maleic Hydrazide	123-33-1	3.2E+04	n	4.1E+05	nm					1.0E+04	n		2.1E+00	n				
				1.00E-04	P					1	0.1	Malononitrile	109-77-3	6.3E+00	n	8.2E+01	n					2.0E+00	n		4.1E-04	n				
				3.00E-02	H					1	0.1	Mancozeb	8018-01-7	1.9E+03	n	2.5E+04	n					5.4E+02	n		7.6E-01	n				
				5.00E-03	I					1	0.1	Maneb	12427-38-2	3.2E+02	n	4.1E+03	n					9.8E+01	n		1.4E-01	n				
				1.40E-01	I	5.00E-05	I							Manganese (Diet)	7439-96-5				5.2E-02	n	2.2E-01	n								
				2.40E-02	G	5.00E-05	I			0.04				Manganese (Non-diet)	7439-96-5	1.8E+03	n	2.6E+04	n	5.2E-02	n	2.2E-01	n	4.3E+02	n		2.8E+01	n		
				9.00E-05	H						1	0.1	Mephosfolan	950-10-7	5.7E+00	n	7.4E+01	n					1.8E+00	n		2.6E-03	n			
				3.00E-02	I						1	0.1	Mepiquat Chloride	24307-26-4	1.9E+03	n	2.5E+04	n					6.0E+02	n		2.0E-01	n			
1.10E-02	P								1	0.1	Mercaptobenzothiazole, 2-	149-30-4	4.9E+01	c**	2.1E+02	c*					6.3E+00	c*		1.8E-02	c*					
				3.00E-04	I	3.00E-04	G			0.07			Mercury Compounds												2.0E+00					
						3.00E-04	I	V			1		~Mercuric Chloride (and other Mercury salts)	7487-94-7	2.3E+01	n	3.5E+02	n	3.1E-01	n	1.3E+00	n	5.7E+00	n		2.0E+00				
				1.00E-04	I					1		3.13E+00	~Mercury (elemental)	7439-97-6	7.1E+00	ns	3.0E+01	ns	3.1E-01	n	1.3E+00	n	6.3E-01	n		3.3E-02	n	1.0E-01		
				8.00E-05	I					1	0.1		~Methyl Mercury	22967-92-6	7.8E+00	n	1.2E+02	n					2.0E+00	n		1.4E+01	n			
				3.00E-05	I				V		1		~Phenylmercuric Acetate	62-38-4	5.1E+00	n	6.6E+01	n					1.6E+00	n		5.0E-04	n			
				6.00E-02	I					1	0.1		Merphos	150-50-5	2.3E+00	n	3.5E+01	n					6.0E-01	n		5.9E-02	n			
				1.00E-04	I	3.00E-02	P	V		1		4.58E+03	Metalaxyl	57837-19-1	3.8E+03	n	4.9E+04	n					1.2E+03	n		3.3E-01	n			
				1.00E-04	I					1			Methacrylonitrile	126-98-7	7.5E+00	n	1.0E+02	n	3.1E+01	n	1.3E+02	n	1.9E+00	n		4.3E-04	n			
				5.00E-05	I					1	0.1		Methamidophos	10265-92-6	3.2E+00	n	4.1E+01	n					1.0E+00	n		2.1E-04	n			
				2.00E+00	I	2.00E+01	I	V		1		1.06E+05	Methanol	67-56-1	1.2E+05	nms	1.2E+06	nms	2.1E+04	n	8.8E+04	n	2.0E+04	n		4.1E+00	n			
4.90E-02	C			1.50E-03	O					1	0.1		Methidathion	950-37-8	9.5E+01	n	1.2E+03	n					2.9E+01	n		7.1E-03	n			
				2.50E-02	I					1	0.1		Methomyl	16752-77-5	1.6E+03	n	2.1E+04	n					5.0E+02	n		1.1E-01	n			
				5.00E-03	I					1	0.1		Methoxy-5-nitroaniline, 2-	99-59-2	1.1E+01	c	4.7E+01	c					1.5E+00	c		5.3E-04	c			
				8.00E-03	P	1.00E-03	P	V		1		1.15E+05	Methoxychlor	72-43-5	3.2E+02	n	4.1E+03	n					4.7E+01	n		2.0E+00	n			
				5.00E-03	P	7.00E-03	P	V		1		1.06E+05	Methoxyethanol Acetate, 2-	110-49-6	1.1E+02	n	5.1E+02	n	1.0E+00	n	4.4E+00	n	2.1E+00	n		4.2E-04	n			
				1.00E+00	X				V	1		2.90E+04	Methyl Acetate	109-86-4	2.6E+02	n	2.0E+03	n	7.3E+00	n	3.1E+01	n	1.3E+01	n		2.6E-03	n			
										1			Methyl Acrylate	79-20-9	7.8E+04	ns	1.2E+06	nms					2.0E+04	n		4.1E+00	n			
						2.00E-02	P	V		1		6.75E+03	Methyl Acrylate	96-33-3	1.5E+02	n	6.1E+02	n	2.1E+01	n	8.8E+01	n	4.2E+01	n		8.9E-03	n			
				6.00E-01	I	5.00E+00	I	V		1		2.84E+04	Methyl Ethyl Ketone (2-Butanone)	78-93-3	2.7E+04	n	1.9E+05	nms	5.2E+03	n	2.2E+04	n	5.6E+03	n		1.2E+00	n			
				1.00E-03	P	2.00E-05	X	V		1		1.80E+05	Methyl Hydrazine	60-34-4	1.4E-01	c**	6.2E-01	c**	2.8E-03	c**	1.2E-02	c**	5.6E-03	c**		1.3E-06	c**			
						3.00E+00	I	V		1			Methyl Isobutyl Ketone (4-methyl-2-pentanone)	108-10-1	3.3E+04	n	1.4E+05	nms	3.1E+03	n	1.3E+04	n	6.3E+03	n		1.4E+00	n			
						1.00E-03	C	V		1		1.01E+04	Methyl Isocyanate	624-83-9	4.6E+00	n	1.9E+01													

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = Wt; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																													
Toxicity and Chemical-specific Information													Contaminant		Screening Levels												Protection of Groundwater SSLs		
SFO (mg/kg-day) ⁻¹	k e y	IUR (ug/m ³) ⁻¹	k e y	RfD _c (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _s	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
2.00E-03	I	1.00E-08	I	6.00E-03	I	6.00E-01	I	V	M	1		3.32E+03	Methylene Chloride	75-09-2	5.7E+01	c**	1.0E+03	c**	1.0E+02	c**	1.2E+03	c**	1.1E+01	c**	5.0E+00	2.9E-03	c**	1.3E-03	
1.00E-01	P	4.30E-04	C	2.00E-03	P				M	1	0.1		Methylene-bis(2-chloroaniline), 4,4'-	101-14-4	1.2E+00	c	2.3E+01	c*	2.4E-03	c	2.9E-02	c	1.6E-01	c		1.8E-03	c		
4.60E-02	I	1.30E-05	C							1	0.1		Methylene-bis(N,N-dimethyl) Aniline, 4,4'-	101-61-1	1.2E+01	c	5.0E+01	c	2.2E-01	c	9.4E-01	c	7.0E-01	c		3.9E-03	c		
1.60E+00	C	4.60E-04	C			2.00E-02	C			1	0.1		Methylenbisbenzenamine, 4,4'-	101-77-9	3.4E-01	c	1.4E+00	c	6.1E-03	c	2.7E-02	c	4.7E-02	c		2.1E-04	c		
						6.00E-04	I			1	0.1		Methylenediphenyl Diisocyanate	101-68-8	8.5E+05	nm	3.6E+06	nm	6.3E-01	n	2.6E+00	n							
				7.00E-02	H			V		1		5.00E+02	Methylstyrene, Alpha-	98-83-9	5.5E+03	ns	8.2E+04	ns					7.8E+02	n		1.2E+00	n		
				1.50E-01	I					1	0.1		Metolachlor	51218-45-2	9.5E+03	n	1.2E+05	nm					2.7E+03	n		3.2E+00	n		
				2.50E-02	I					1	0.1		Metribuzin	21087-64-9	1.6E+03	n	2.1E+04	n					4.9E+02	n		1.5E-01	n		
				2.50E-01	I					1	0.1		Metsulfuron-methyl	74223-64-6	1.6E+04	n	2.1E+05	nm					4.9E+03	n		1.9E+00	n		
4.50E-06	X			1.00E-02	X	1.00E-01	P	V		1		6.86E+00	Midrange Aliphatic Hydrocarbon Streams	E1790669	6.5E-01	c	2.8E+00	c	6.2E-01	c	2.7E+00	c	1.2E+00	c*		1.8E-02	c*		
1.80E+01	C	5.10E-03	C	3.00E+00	P			V		1		3.42E-01	Mineral oils	8012-95-1	2.3E+05	nms	3.5E+06	nms					6.0E+04	n		2.4E+03	n		
				2.00E-03	I					1	0.1		Mirex	2385-85-5	3.6E-02	c	1.7E-01	c	5.5E-04	c	2.4E-03	c	8.8E-04	c		6.3E-04	c		
				2.00E-03	I					1			Molinate	2212-67-1	1.3E+02	n	1.6E+03	n					3.0E+01	n		1.7E-02	n		
				5.00E-03	I	2.00E-03	A			1			Molybdenum	7439-98-7	3.9E+02	n	5.8E+03	n	2.1E+00	n	8.8E+00	n	1.0E+02	n		2.0E+00	n		
				1.00E-01	I					1			Monochloramine	10599-90-3	7.8E+03	n	1.2E+05	nm					2.0E+03	n	4.0E+03(G)				
				2.00E-03	P					1	0.1		Monomethylaniline	100-61-8	1.3E+02	n	1.6E+03	n					3.8E+01	n		1.4E-02	n		
				2.50E-02	I					1	0.1		Myclobutanil	88671-89-0	1.6E+03	n	2.1E+04	n					4.5E+02	n		5.6E+00	n		
				3.00E-04	X					1	0.1		N,N'-Diphenyl-1,4-benzenediamine	74-31-7	1.9E+01	n	2.5E+02	n					3.6E+00	n		3.7E-01	n		
				2.00E-03	I			V		1			Naled	300-76-5	1.6E+02	n	2.3E+03	n					4.0E+01	n		1.8E-02	n		
1.80E+00	C	0.00E+00	C	3.00E-02	X	1.00E-01	P	V		1	0.1		Naphtha, High Flash Aromatic (HFAN)	64742-95-6	2.3E+03	n	3.5E+04	n	1.0E+02	n	4.4E+02	n	1.5E+02	n					
										1			Naphthylamine, 2-	91-59-8	3.0E-01	c	1.3E+00	c					3.9E-02	c		2.0E-04	c		
				1.20E-01	O					1	0.1		Napropamide	15299-99-7	7.6E+03	n	9.8E+04	n					2.0E+03	n		1.3E+01	n		
		2.60E-04	C	1.10E-02	C	1.40E-05	C			1	0.1		Nickel Acetate	373-02-4	6.7E+02	n	8.1E+03	n	1.1E-02	c**	4.7E-02	c**	2.2E+02	n		4.5E-02	n		
		2.60E-04	C	1.10E-02	C	1.40E-05	C			1	0.1		Nickel Carbonate	3333-67-3	6.7E+02	n	8.1E+03	n	1.1E-02	c**	4.7E-02	c**	2.2E+02	n					
		2.60E-04	C	1.10E-02	C	1.40E-05	C	V		1			Nickel Carbonyl	13463-39-3	8.2E+02	n	1.1E+04	n	1.1E-02	c**	4.7E-02	c**	2.2E-02	c**					
		2.60E-04	C	1.10E-02	C	1.40E-05	C			0.04			Nickel Hydroxide	12054-48-7	8.2E+02	n	1.1E+04	n	1.1E-02	c**	4.7E-02	c**	2.0E+02	n					
		2.60E-04	C	1.10E-02	C	2.00E-05	C			0.04			Nickel Oxide	1313-99-1	8.4E+02	n	1.2E+04	n	1.1E-02	c**	4.7E-02	c**	2.0E+02	n					
		2.40E-04	I	1.10E-02	C	1.40E-05	C			0.04			Nickel Refinery Dust	E715532	8.2E+02	n	1.1E+04	n	1.2E-02	c**	5.1E-02	c**	2.2E+02	n		3.2E+01	n		
		2.60E-04	C	2.00E-02	I	1.00E-05	T			0.04			Nickel Soluble Salts	7440-02-0	1.4E+03	n	1.7E+04	n	1.0E-02	n	4.4E-02	n	3.9E+02	n		2.6E+01	n		
1.70E+00	C	4.80E-04	I	1.10E-02	C	1.40E-05	C			0.04			Nickel Sulfide	12035-72-2	4.1E-01	c	1.9E+00	c	5.8E-03	c**	2.6E-02	c**	4.5E-02	c					
9.10E-01	C	2.60E-04	C	1.10E-02	C	1.40E-05	C				0.1		Nickelocene	1271-28-9	6.0E-01	c	2.5E+00	c	1.1E-02	c**	4.7E-02	c**	8.6E-02	c					
				1.60E+00	I					1			Nitrate (measured as nitrogen)	14797-55-8	1.3E+05	nm	1.9E+06	nm					3.2E+04	n	1.0E+04				
										1			Nitrate + Nitrite (measured as nitrogen)	E701177											1.0E+04				
				1.00E-01	I					1			Nitrite (measured as nitrogen)	14797-65-0	7.8E+03	n	1.2E+05	nm					2.0E+03	n	1.0E+03				
2.00E-02	P			1.00E-02	X	5.00E-05	X			1	0.1		Nitroaniline, 2-	88-74-4	6.3E+02	n	8.0E+03	n	5.2E-02	n	2.2E-01	n	1.9E+02	n		8.0E-02	n		
				4.00E-03	P	6.00E-03	P			1	0.1		Nitroaniline, 4-	100-10-6	2.7E+01	c**	1.1E+02	c*	6.3E+00	n	2.6E+01	n	3.8E+00	c*		1.6E-03	c*		
		4.00E-05	I	2.00E-03	I	9.00E-03	I	V		1		3.05E+03	Nitrobenzene	98-95-3	5.1E+00	c*	2.2E+01	c*	7.0E-02	c	3.1E-01	c	1.4E-01	c*		9.2E-05	c*		
				3.00E+03	P					1	0.1		Nitrocellulose	9004-70-0	1.9E+08	nm	2.5E+09	nm					6.0E+07	n		1.3E+04	n		
				7.00E-02	H					1	0.1		Nitrofurantoin	67-20-9	4.4E+03	n	5.7E+04	n					1.4E+03	n		6.1E-01	n		
1.30E+00	C	3.70E-04	C							1	0.1		Nitrofurazone	59-87-0	4.2E-01	c	1.8E+00	c	7.6E-03	c	3.3E-02	c	6.0E-02	c		5.4E-05	c		
1.70E-02	P			1.00E-04	P					1	0.1		Nitrogluciferin	55-63-0	6.3E+00	n	8.2E+01	n					2.0E+00	n		8.5E-04	n		
				1.00E-01	I					1	0.1		Nitroguanidine	556-88-7	6.3E+03	n	8.2E+04	n					2.0E+03	n		4.8E-01	n		
		8.80E-06	P			5.00E-03	P	V		1		1.80E+04	Nitromethane	75-52-5	5.4E+00	c*	2.4E+01	c*	3.2E-01	c*	1.4E+00	c*	6.4E-01	c*		1.4E-04	c*		
		5.80E-04	X			2.00E-02	I	V		1		4.86E+03	Nitropropane, 2-	79-46-9	6.4E-02	c	2.8E-01	c	4.8E-03	c	2.1E-02	c	9.7E-03	c		2.5E-06	c		
2.70E+01	C	7.70E-03	C						M	1	0.1		Nitroso-N-ethylurea, N-	759-73-9	4.5E-03	c	8.5E-02	c	1.3E-04	c	1.6E-03	c	9.						

Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³) ¹	k e y	RfD _c (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _g	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
1.00E-04	X			1.00E+00	P	V				1	0.1	3.88E+02	Pentamethylphosphoramide (PMPA)	10159-46-3	6.3E+00	n	8.2E+01	n					2.0E+00	n		4.1E-04	n	
				3.00E-06	D					1	0.1		Pentane, n-Per- and Polyfluoroalkyl Substances (PFAS)	109-66-0	8.1E+02	ns	3.4E+03	ns	1.0E+03	n	4.4E+03	n	2.1E+03	n		1.0E+01	n	
				1.00E-03	I			V		1		2.68E+02	~Ammonium perfluoro-2-methyl-3-oxahexanoate	62037-80-3	1.9E-01	n	2.5E+00	n					2.1E-02	n		2.2E-05	n	
				2.07E-09	I					1	0.1		~Ammonium perfluorobutanoate	10495-86-0	7.8E+01	n	1.2E+03	ns					1.9E+01	n		6.8E-03	n	
				5.00E-04	I					1	0.1		~Ammonium perfluorodecanoate	3108-42-7	1.3E-04	n	1.7E-03	n					4.2E-05	n		4.1E-08	n	
2.93E+04	D			3.00E-08	D					1	0.1		~Ammonium perfluorohexanoate	21615-47-4	3.2E+01	n	4.1E+02	n					7.2E+00	n		1.7E-03	n	
				3.00E-04	R			V		1			~Ammonium perfluorooctanoate	3825-26-1	1.9E-05	c	7.8E-05	c					2.7E-06	c		4.0E-08	c	
				3.00E-06	D			V		1		1.92E+06	~Bis(trifluoromethylsulfonyl)amine (TFSl)	82113-65-3	2.3E+01	n	3.5E+02	n					5.9E+00	n		1.9E-03	n	
				3.00E-06	D			V		1			~Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	2.3E-01	n	3.5E+00	n					1.5E-02	n	1.0E-02(G)	1.5E-05	n	1.0E-05
				3.00E-04	R			V		1		1.92E+06	~Lithium bis(trifluoromethylsulfonyl)azanide	90076-65-6	2.3E+01	n	3.5E+02	n					6.0E+00	n		1.9E-03	n	
				3.00E-06	D			V		1			~Perfluoro(2-propoxypropanoate)	122499-17-6	2.3E-01	n	3.5E+00	n					6.0E-02	n	1.0E-02(G)	6.1E-05	n	1.0E-05
				3.00E-04	P					1	0.1		~Perfluorobutanesulfonate	45187-15-3	1.9E+01	n	2.5E+02	n					6.0E+00	n	(G)	3.0E-03	n	
				3.00E-04	P					1	0.1		~Perfluorobutanesulfonic acid (PFBS)	375-73-5	1.9E+01	n	2.5E+02	n					6.0E+00	n	(G)	3.0E-03	n	
				1.00E-03	I			V		1		2.56E+03	~Perfluorobutanoate	45048-62-2	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.3E-03	n	
				1.00E-03	I			V		1		2.57E+03	~Perfluorobutanoic acid (PFBA)	375-22-4	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.5E-03	n	
				2.00E-09	I					1	0.1		~Perfluorodecanoate	73829-36-4	1.3E-04	n	1.6E-03	n					4.0E-05	n		4.0E-08	n	
				2.00E-09	I					1	0.1		~Perfluorodecanoic acid (PFDA)	335-76-2	1.3E-04	n	1.6E-03	n					4.0E-05	n		8.1E-08	n	
				5.00E-05	N					1	0.1		~Perfluorododecanoic acid (PFDoDA)	307-55-1	3.2E+00	n	4.1E+01	n					1.0E+00	n		1.7E-01	n	
				2.00E-05	A					1	0.1		~Perfluorohexanesulfonate	108427-53-8	1.3E+00	n	1.6E+01	n					3.9E-01	n	1.0E-02(G)	1.7E-04	n	4.2E-06
				2.00E-05	A					1	0.1		~Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1.3E+00	n	1.6E+01	n					3.9E-01	n	1.0E-02(G)	1.7E-04	n	4.2E-06
				5.00E-04	I					1	0.1		~Perfluorohexanoate	92612-52-7	3.2E+01	n	4.1E+02	n					6.1E+00	n		1.5E-03	n	
				5.00E-04	I					1	0.1		~Perfluorohexanoic acid (PFHxA)	307-24-4	3.2E+01	n	4.1E+02	n					9.9E+00	n		2.4E-03	n	
				3.00E-06	A					1	0.1		~Perfluorononanoate	72007-68-2	1.9E-01	n	2.5E+00	n					5.9E-02	n	1.0E-02(G)	2.5E-04	n	4.2E-05
				3.00E-06	A					1	0.1		~Perfluorononanoic acid (PFNA)	375-95-1	1.9E-01	n	2.5E+00	n					5.9E-02	n	1.0E-02(G)	2.5E-04	n	4.2E-05
				4.00E-02	N					1	0.1		~Perfluorooctadecanoic acid (PFODA)	16517-11-6	2.5E+03	n	3.3E+04	n					8.0E+02	n		2.2E+02	n	
3.95E+01	D			1.00E-07	D					1	0.1		~Perfluorooctanesulfonate	45289-90-6	6.3E-03	n	5.8E-02	c**					2.0E-03	c**	4.0E-03	1.5E-05	c**	3.0E-05
3.95E+01	D			1.00E-07	D					1	0.1		~Perfluorooctanesulfonic acid (PFOS)	1763-23-1	6.3E-03	n	5.8E-02	c**					2.0E-03	c**	4.0E-03	1.5E-05	c**	3.0E-05
2.93E+04	D			3.00E-08	D					1	0.1		~Perfluorooctanoate	45285-51-6	1.9E-05	c	7.8E-05	c					2.7E-06	c	4.0E-03	4.0E-08	c	6.1E-05
2.93E+04	D			3.00E-08	D					1	0.1		~Perfluorooctanoic acid (PFOA)	335-67-1	1.9E-05	c	7.8E-05	c					2.7E-06	c	4.0E-03	4.0E-08	c	6.1E-05
				5.00E-04	R			V		1		1.36E+04	~Perfluoropropanoic acid (PFPrA)	422-64-0	3.9E+01	n	5.8E+02	n					9.8E+00	n		2.1E-03	n	
				1.00E-03	N					1	0.1		~Perfluorotetradecanoic acid (PFTeDA)	376-06-7	6.3E+01	n	8.2E+02	n					2.0E+01	n		9.4E+00	n	
				3.00E-04	N					1	0.1		~Perfluoroundecanoic acid (PFUDA)	2058-94-8	1.9E+01	n	2.5E+02	n					6.0E+00	n		4.5E-02	n	
				3.00E-04	P					1	0.1		~Potassium perfluorobutanesulfonate	29420-49-3	1.9E+01	n	2.5E+02	n					6.0E+00	n		3.0E-03	n	
				2.00E-03	I			V		1		9.61E+04	~Potassium perfluorobutanoate	2966-54-3	1.6E+02	n	2.3E+03	n					3.8E+01	n		1.3E-02	n	
				2.15E-09	I					1	0.1		~Potassium perfluorodecanoate	51604-85-4	1.4E-04	n	1.8E-03	n					4.3E-05	n		4.3E-08	n	
3.95E+01	D			1.00E-07	D					1	0.1		~Potassium perfluorooctanesulfonate	2795-39-3	6.3E-03	n	5.8E-02	c**					2.0E-03	c**		1.5E-05	c**	
				1.00E-03	I			V		1		8.99E+04	~Sodium perfluorobutanoate	2218-54-4	7.8E+01	n	1.2E+03	n					1.8E+01	n		6.4E-03	n	
				2.00E-09	I					1	0.1		~Sodium perfluorodecanoate	3830-45-3	1.3E-04	n	1.7E-03	n					4.2E-05	n		4.2E-08	n	
				5.00E-04	I					1	0.1		~Sodium perfluorohexanoate	2923-26-4	3.2E+01	n	4.1E+02	n					1.0E+01	n		2.4E-03	n	
				7.00E-04	I					1			Perchlorates															
				7.00E-04	I					1			~Ammonium Perchlorate	7790-98-9	5.5E+01	n	8.2E+02	n					1.4E+01	n				
				7.00E-04	I					1			~Lithium Perchlorate	7791-03-9	5.5E+01	n	8.2E+02	n					1.4E+01	n				
				7.00E-04	I					1			~Perchlorate and Perchlorate Salts	14797-73-0	5.5E+01	n	8.2E+02	n					1.4E+01	n	1.5E+01(G)			
				7.00E-04	I					1			~Potassium Perchlorate	7778-74-7	5.5E+01	n	8.2E+02	n					1.4E+01	n				
				7.00E-04	I					1			~Sodium Perchlorate	7601-89-0	5.5E+01	n	8.2E+02	n					1.4E+01	n				
2.20E-03	C	6.30E-07	C	5.00E-02	I					1	0.1		Permethrin	52645-53-1	3.2E+03	n	4.1E+04	n					1.0E+03	n		2.4E+02	n	
				2.40E-01	O					1	0.1		Phenacetin	62-44-2	2.5E+02	c	1.0E+03	c	4.5E+00	c	1.9E+01	c	3.4E+01	c		9.7E-03	c	
				2.40E-01	O					1	0.1		Phenmedipham	13684-63-4	1.5E+04	n	2.0E+05	nm										

Regional Screening Level (RSL) Summary Table (TR=1E-06, HQ=1) November 2024

Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs		
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³ -y) ¹	k e y	RfD _h (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	o t h e r m u t a g e n	GIABS	ABS _g	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	k e y	Industrial Soil (mg/kg)	k e y	Resident Air (ug/m ³)	k e y	Industrial Air (ug/m ³)	k e y	Tap Water (ug/L)	k e y	MCL (ug/L)	Risk-based SSL (mg/kg)	k e y	MCL-based SSL (mg/kg)
				1.00E+00	P				1			~Sodium trimetaphosphate	7785-84-4	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				1.00E+00	P				1			~Sodium tripolyphosphate	7758-29-4	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				1.00E+00	P				1			~Tetrapotassium phosphate	7320-34-5	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				1.00E+00	P				1			~Tetrasodium pyrophosphate	7722-88-5	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				3.25E+00	X				1			~Trialluminum sodium tetra decahydrogenoctaorthophosphate (dihydrate)	15136-87-5	2.5E+05	nm	3.8E+06	nm					6.5E+04	n				
				3.13E+00	X				1	0.1		~Triphosphoric acid, aluminum salt (1:1) [aluminum triphosphate]	13939-25-8	2.0E+05	nm	2.6E+06	nm					6.2E+04	n				
				1.00E+00	P				1			~Tripotassium phosphate	7778-53-2	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				1.00E+00	P				1			~Trisodium phosphate	7601-54-9	7.8E+04	n	1.2E+06	nm					2.0E+04	n				
				3.00E-04	I	3.00E-04	I	V	1			Phosphine	7803-51-2	2.3E+01	n	3.5E+02	n	3.1E-01	n	1.3E+00	n	5.7E-01	n				
				2.00E-05	I			V	1			Phosphorus	7723-14-0	1.6E+00	n	2.3E+01	n					4.0E-01	n			1.5E-03	n
				2.00E-05	G			V	1			Phosphorus, white	12185-10-3	1.6E+00	n	2.3E+01	n					4.0E-01	n			1.5E-03	n
1.40E-02	I	2.40E-06	C	2.00E-02	I				1	0.1		~Bis(2-ethylhexyl)phthalate	117-81-7	3.9E+01	c*	1.6E+02	c	1.2E+00	c	5.1E+00	c	5.6E+00	c*	6.0E+00	1.3E+00	c*	1.4E+00
1.90E-03	P			2.00E-01	I				1	0.1		~Butyl Benzyl Phthalate	85-68-7	2.9E+02	c*	1.2E+03	c					1.6E+01	c		2.4E-01	c	
				1.00E+00	I				1	0.1		~Butylphthalyl Butylglycolate	85-70-1	6.3E+04	n	8.2E+05	nm					1.3E+04	n		3.1E+02	n	
				1.00E-01	I				1	0.1		~Dibutyl Phthalate	84-74-2	6.3E+03	n	8.2E+04	n					9.0E+02	n		2.3E+00	n	
				8.00E-01	I				1	0.1		~Diethyl Phthalate	84-66-2	5.1E+04	n	6.6E+05	nm					1.5E+04	n		6.1E+00	n	
				1.00E-01	I			V	1			~Dimethylterephthalate	120-61-6	7.8E+03	n	1.2E+05	nm					1.9E+03	n		4.9E-01	n	
				1.00E-02	P				1	0.1		~Octyl Phthalate, di-N-	117-84-0	6.3E+02	n	8.2E+03	n					2.0E+02	n		5.7E+01	n	
				5.00E-01	X				1	0.1		~Phthalic Acid, p-	100-21-0	3.2E+04	n	4.1E+05	nm					9.4E+03	n		3.4E+00	n	
				2.00E+00	I	2.00E-02	C		1	0.1		~Phthalic Anhydride	85-44-9	1.3E+05	nm	1.6E+06	nm	2.1E+01	n	8.8E+01	n	3.9E+04	n	5.0E+02	8.5E+00	n	
				7.00E-02	I				1	0.1		Picloram	1918-02-1	4.4E+03	n	5.7E+04	n					1.4E+03	n		3.8E-01	n	1.4E-01
				1.00E-04	X				1	0.1		Picramic Acid (2-Amino-4,6-dinitrophenol)	96-91-3	6.3E+00	n	8.2E+01	n					2.0E+00	n		1.3E-03	n	
				2.00E-03	X				1	0.1		Picric Acid (2,4,6-Trinitrophenol)	88-89-1	1.3E+02	n	1.6E+03	n					4.0E+01	n		1.9E-01	n	
				7.30E-04	O				1	0.1		Pinimphos, Methyl	29232-93-7	4.6E+01	n	6.0E+02	n					8.9E+00	n		8.4E-03	n	
3.00E+01	C	8.60E-03	C	7.00E-06	H				1	0.1		Polybrominated Biphenyls	36355-01-8	1.8E-02	c*	7.7E-02	c*	3.3E-04	c	1.4E-03	c	2.6E-03	c*				
												Polychlorinated Biphenyls (PCBs)															
7.00E-02	G	2.00E-05	G	7.00E-05	I			V	1	0.14		~Aroclor 1016	12674-11-2	4.1E+00	n	2.7E+01	c**	1.4E-01	c	6.1E-01	c	2.2E-01	c**		2.1E-02	c**	
2.00E+00	G	5.71E-04	G					V	1	0.14		~Aroclor 1221	11104-28-2	2.0E-01	c	8.3E-01	c	4.9E-03	c	2.1E-02	c	4.7E-03	c		8.0E-05	c	
2.00E+00	G	5.71E-04	G					V	1	0.14		~Aroclor 1232	11141-16-5	1.7E-01	c	7.2E-01	c	4.9E-03	c	2.1E-02	c	4.7E-03	c		8.0E-05	c	
2.00E+00	G	5.71E-04	G					V	1	0.14		~Aroclor 1242	53469-21-9	2.3E-01	c	9.5E-01	c	4.9E-03	c	2.1E-02	c	7.8E-03	c		1.2E-03	c	
2.00E+00	G	5.71E-04	G					V	1	0.14		~Aroclor 1248	12672-29-6	2.3E-01	c	9.4E-01	c	4.9E-03	c	2.1E-02	c	7.8E-03	c		1.2E-03	c	
2.00E+00	G	5.71E-04	G	2.00E-05	I			V	1	0.14		~Aroclor 1254	11097-69-1	2.4E-01	c**	9.7E-01	c*	4.9E-03	c	2.1E-02	c	7.8E-03	c*		2.0E-03	c*	
2.00E+00	G	5.71E-04	G					V	1	0.14		~Aroclor 1260	11096-82-5	2.4E-01	c	9.9E-01	c	4.9E-03	c	2.1E-02	c	7.8E-03	c		5.5E-03	c	
				6.00E-04	X			V	1	0.14		~Aroclor 5460	11126-42-4	3.5E-01	n	4.4E+02	n					1.2E+01	n		2.0E+00	n	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Heptachlorobiphenyl, 2,3,3',4,4',5,5'-(PCB 189)	39635-31-9	1.3E-01	c*	5.2E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		2.8E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Hexachlorobiphenyl, 2,3',4,4',5,5'-(PCB 167)	52663-72-6	1.2E-01	c*	5.1E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.7E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Hexachlorobiphenyl, 2,3,3',4,4',5'-(PCB 157)	69782-90-7	1.2E-01	c*	5.0E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.7E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Hexachlorobiphenyl, 2,3,3',4,4',5-(PCB 156)	38380-08-4	1.2E-01	c*	5.0E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.7E-03	c	
3.90E+03	W	1.14E+00	W	2.33E-08	W	1.33E-06	W	V	1	0.14		~Hexachlorobiphenyl, 3,3',4,4',5,5'-(PCB 169)	32774-16-6	1.2E-04	c*	5.1E-04	c*	2.5E-06	c	1.1E-05	c	4.0E-06	c		1.7E-06	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Pentachlorobiphenyl, 2,3,4,4',5-(PCB 123)	65510-44-3	1.2E-01	c*	4.9E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.0E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Pentachlorobiphenyl, 2,3',4,4',5-(PCB 118)	31508-00-6	1.2E-01	c*	4.9E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.0E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Pentachlorobiphenyl, 2,3,3',4,4'-(PCB 105)	32598-14-4	1.2E-01	c*	4.9E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.0E-03	c	
3.90E+00	W	1.14E-03	W	2.33E-05	W	1.33E-03	W	V	1	0.14		~Pentachlorobiphenyl, 2,3,4,4',5-(PCB 114)	74472-37-0	1.2E-01	c*	5.0E-01	c*	2.5E-03	c	1.1E-02	c	4.0E-03	c		1.0E-03	c	
1.30E+04	W	3.80E+00	W	7.00E-09	W	4.00E-07	W	V	1	0.14		~Pentachlorobiphenyl, 3,3',4,4',5-(PCB 126)	57465-28-8	3.6E-05	c*	1.5E-04	c*	7.4E-07	c	3.2E-06	c	1.2E-06	c		3.0E-07	c	
2.00E+00	I	5.71E-04	I					V	1	0.14		~Polychlorinated Biphenyls (high risk)	1336-36-3	2.3E-01	c	9.4E-01	c	4.9E-03	c	2.1E-02	c			5.0E-01	5.0E-01		

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = Wt; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																														
Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs					
SFO (mg/kg-day) ⁻¹	k e y	IUR (ug/m ³ -y) ⁻¹	RfD _a (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	V o l	mutagen	GIABS	ABS _s	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)			
1.92E-01	O		1.30E-02	I						1	0.1	Propachlor	1918-16-7	8.2E+02	n	1.1E+04	n					2.5E+02	n			1.5E-01	n			
			5.00E-03	I					1	0.1	Propanil	709-98-8	3.2E+02	n	4.1E+03	n					8.2E+01	n			4.5E-02	n				
			4.00E-02	O						0.1	Propargite	2312-35-8	2.8E+00	c	1.2E+01	c					1.6E-01	c			1.1E-02	c				
			2.00E-03	I			V				1.11E+05	Propargyl Alcohol	107-19-7	1.6E+02	n	2.3E+03	n					4.0E+01	n			8.1E-03	n			
			2.00E-02	I						1	0.1	Propazine	139-40-2	1.3E+03	n	1.6E+04	n					3.4E+02	n			3.0E-01	n			
			2.00E-02	I						1	0.1	Propham	122-42-9	1.3E+03	n	1.6E+04	n					3.5E+02	n			2.2E-01	n			
2.40E-01	I	3.70E-06	I	1.00E-01	O					1	0.1	Propiconazole	60207-90-1	6.3E+03	n	8.2E+04	n					1.6E+03	n			5.3E+00	n			
						8.00E-03	I	V			1		Propionaldehyde	123-38-6	7.5E+01	n	3.1E+02	n	8.3E+00	n	3.5E+01	n	1.7E+01	n			3.4E-03	n		
						1.00E-01	X		V		1		Propyl benzene	103-65-1	3.8E+03	ns	2.4E+04	ns	1.0E+03	n	4.4E+03	n	6.6E+02	n			1.2E+00	n		
						3.00E+00	C	V			1		Propylene	115-07-1	2.2E+03	ns	9.3E+03	ns	3.1E+03	n	1.3E+04	n	6.3E+03	n			6.0E+00	n		
						2.00E+01	P				1	0.1	Propylene Glycol	57-55-6	1.3E+06	nm	1.6E+07	nm					4.0E+05	n			8.1E+01	n		
						2.72E-04	A				1	0.1	Propylene Glycol Dinitrate	6423-43-4	3.9E+05	nm	1.6E+06	nm	2.8E-01	n	1.2E+00	n								
2.40E-01	I	3.70E-06	I	7.00E-01	H	2.00E+00	I	V			1	1.06E+05	Propylene Glycol Monomethyl Ether	107-98-2	4.1E+04	n	3.7E+05	nms	2.1E+03	n	8.8E+03	n	3.2E+03	n			6.5E-01	n		
						3.00E-02	I	V			1	7.77E+04	Propylene Oxide	75-56-9	2.1E+00	c	9.7E+00	c	7.6E-01	c*	3.3E+00	c*	2.7E-01	c			5.6E-05	c		
						1.00E-03	I		V		1		Pyridine	110-86-1	7.8E+01	n	1.2E+03	n					2.0E+01	n			6.8E-03	n		
						5.00E-04	I				1	0.1	Quinalphos	13593-03-8	3.2E+01	n	4.1E+02	n					5.1E+00	n			4.3E-02	n		
						9.00E-03	I				1	0.1	Quinoline	91-22-5	1.8E-01	c	7.7E-01	c					2.4E-02	c			7.8E-05	c		
											1	0.1	Quizalofop-ethyl	76578-14-8	5.7E+02	n	7.4E+03	n					1.2E+02	n			1.9E+00	n		
3.00E+00	I			3.00E+04	A					1		Refractory Ceramic Fibers (units in fibers)	E715557					3.1E+04	G	1.3E+05	G									
						3.00E-02	I				1	0.1	Resmethrin	10453-86-8	1.9E+03	n	2.5E+04	n					6.7E+01	n			4.2E+01	n		
						5.00E-02	H		V		1		Ronnel	299-84-3	3.9E+03	n	5.8E+04	n					4.1E+02	n			3.7E+00	n		
						4.00E-03	I				1	0.1	Rotenone	83-79-4	2.5E+02	n	3.3E+03	n					6.1E+01	n			3.2E+01	n		
									M		1	0.1	Safrole	94-59-7	5.5E-01	c	1.0E+01	c	1.6E-02	c	1.9E-01	c	9.6E-02	c			5.9E-05	c		
						5.00E-03	I				1		Selenious Acid	7783-00-8	3.9E+02	n	5.8E+03	n					1.0E+02	n						
2.20E-01	C	6.30E-05	C	5.00E-03	I	2.00E-02	C				1		Selenium	7782-49-2	3.9E+02	n	5.8E+03	n	2.1E+01	n	8.8E+01	n	1.0E+02	n		5.0E+01	5.2E-01	n	2.6E-01	
						5.00E-03	C	2.00E-02	C		1		Selenium Sulfide	7446-34-6	3.9E+02	n	5.8E+03	n	2.1E+01	n	8.8E+01	n	1.0E+02	n						
						1.40E-01	O				1	0.1	Sethoxydim	74051-80-2	8.8E+03	n	1.1E+05	nm					1.6E+03	n			1.4E+01	n		
								3.00E-03	C		1		Silica (crystalline, respirable)	7631-86-9	4.3E+06	nm	1.8E+07	nm	3.1E+00	n	1.3E+01	n								
						5.00E-03	I			0.04			Silver	7440-22-4	3.9E+02	n	5.8E+03	n					9.4E+01	n			8.0E-01	n		
						5.00E-03	I				1	0.1	Simazine	122-34-9	4.5E+00	c*	1.9E+01	c					6.1E-01	c		4.0E+00		3.0E-04	c	2.0E-03
2.70E-01	H			1.30E-02	I						1		Sodium Acifluorfen	62476-59-9	8.2E+02	n	1.1E+04	n					2.6E+02	n			2.1E+00	n		
						4.00E-03	I				1		Sodium Azide	26628-22-8	3.1E+02	n	4.7E+03	n					8.0E+01	n						
						3.00E-02	I				1	0.1	Sodium Diethyldithiocarbamate	148-18-5	2.0E+00	c	8.5E+00	c					2.9E-01	c			1.8E-04	c		
						5.00E-02	A	1.40E-02	C		1		Sodium Fluoride	7681-49-4	3.9E+03	n	5.8E+04	n	1.5E+01	n	6.1E+01	n	1.0E+03	n		4.0E+03	1.5E+02	n	6.0E+02	
						2.00E-05	I				1	0.1	Sodium Fluoroacetate	62-74-8	1.3E+00	n	1.6E+01	n					4.0E-01	n			8.1E-05	n		
						1.00E-03	H				1		Sodium Metavanadate	13718-26-8	7.8E+01	n	1.2E+03	n					2.0E+01	n						
2.40E-02	H			8.00E-04	P						1		Sodium Tungstate	13472-45-2	6.3E+01	n	9.3E+02	n					1.6E+01	n						
						8.00E-04	P				1		Sodium Tungstate Dihydrate	10213-10-2	6.3E+01	n	9.3E+02	n					1.6E+01	n						
						3.00E-02	I				1	0.1	Stirofos (Tetrachlorovinphos)	961-11-5	2.3E+01	c*	9.6E+01	c					2.8E+00	c			8.2E-03	c		
						6.00E-01	I				1		Strontium, Stable	7440-24-6	4.7E+04	n	7.0E+05	nm					1.2E+04	n			4.2E+02	n		
						3.00E-04	I				1	0.1	Strychnine	57-24-9	1.9E+01	n	2.5E+02	n					5.9E+00	n			6.5E-02	n		
						2.00E-01	I	1.00E+00	I	V	1		Styrene	100-42-5	6.0E+03	ns	3.5E+04	ns	1.0E+03	n	4.4E+03	n	1.2E+03	n		1.0E+02	1.3E+00	n	1.1E-01	
5.00E-03	C	1.30E-06	C	3.00E-03	P						1	0.1	Styrene-Acrylonitrile (SAN) Trimer (THNA isomer)	57964-39-3	1.9E+02	n	2.5E+03	n					4.8E+01	n						
						3.00E-03	P				1	0.1	Styrene-Acrylonitrile (SAN) Trimer (THNP isomer)	57964-40-6	1.9E+02	n	2.5E+03	n					4.8E+01	n						
						1.00E-03	P	2.00E-03	X		1	0.1	Sulfolane	126-33-0	6.3E+01	n	8.2E+02	n	2.1E+00	n	8.8E+00	n	2.0E+01	n			4.4E-03	n		
						8.00E-04	P				1	0.1	Sulfonylbis(4-chlorobenzene), 1,1'-	80-07-9	5.1E+01	n	6.6E+02	n					1.1E+01	n			6.5E-02	n		
								1.00E-03	C	V		1		Sulfur Trioxide	7446-11-9	1.4E+06	nm	6.0E+06	nm	1.0E+00	n	4.4E+00	n	2.1E+00	n					
						1.00E-03	C				1		Sulfuric Acid	7664-93-9	1.4E+06	nm	6.0E+06	nm	1.0E+00	n	4.4E+00	n	2.1E+00	n						
2.50E-02	I	7.10E-06	I	5.00E-02	H						1	0.1	Sulfurous acid, 2-chloroethyl 2-[4-(1,1-dimethylethyl)phenoxy]-1-methylethyl ester	140-57-8	2.2E+01	c	9.2E+01	c	4.0E-01	c	1.7E+00	c	1.3E+00	c			1.5E-02	c		
						7.00E-02	I				1	0.1	Tebuthiuron	34014-18-1	4.4E+03	n	5.7E+04	n					1.4E+03	n			3.9E-01	n		
						2.00E-02	H				1	0.1	Temephos	3383-96-8	1.3E+03	n	1.6E+04	n					4.0E+02	n			7.6E+01	n		
						1.30E-02	I				1	0.1	Terbacil	5902-51-2	6.2E+02	n	1.1E+04	n					2.5E+02	n			7.5E-02	n		
						2.50E-05	H		V		1		Terbufos	13071-79-9	2.0E+00	n	2.9E+01	n					2.4E-01	n			5.2E-04	n		
						1.00E-03	I				1	0.1	Terbutryn	886-50-0	6.3E+01	n	8.2E+02	n					1.3E+01	n			1.9E-02	n		
5.00E-03	C	1.30E-06	C					V			1		Tert-Butyl Acetate	540-88-5	8.1E+00	c	3.6E+01	c	2.2E+00	c	9.4E+00	c	3.3E+00	c			7.6E-04	c		
						3.00E-05	P				1	0.1	Tetrabromodiphenyl ether, 2,2',4,4'- (BDE-47)	5436-43-1	6.3E+00	n	8.2E+01	n					2.0E+00	n			5.3E-02	n		
											1		Tetrachlorobenzene, 1,2,4,5-	95-94-3	2.3E+00	n	3.5E+01	n					1.7E-01	n			7.9E-04	n		
						2.60E-02	I	7.40E-06	C		1		Tetrachloroethane, 1,1,1,2-	630-20-6	2.0E+00	c	8.8E+00	c	3.8E-01	c	1.7E+00	c	5.7E-01	c			2.2E-0			

Toxicity and Chemical-specific Information													Contaminant		Screening Levels										Protection of Groundwater SSLs				
SFO (mg/kg-day) ¹	k e y	IUR (ug/m ³ -y)	k e y	RfD _a (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l	mutagen	GIABS	ABS _a	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (ug/L)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)	
1.16E-02	O			3.00E-04	H					1	0.1		Thiofanox	39196-18-4	1.9E+01	n	2.5E+02	n					5.3E+00	n		1.8E-03	n		
				1.60E-01	O					1	0.1		Thiophanate, Methyl	23564-05-8	4.7E+01	c	2.0E+02	c					6.7E+00	c		5.7E-03	c		
				1.50E-02	O					1	0.1		Thiram	137-26-8	9.5E+02	n	1.2E+04	n					2.9E+02	n		4.2E-01	n		
				6.00E-01	H					1			Tin	7440-31-5	4.7E+04	n	7.0E+05	nm					1.2E+04	n		3.0E+03	n		
3.90E-02	C	1.10E-05	C	8.00E-02	I	1.00E-04	A	V	1			8.18E+02	Titanium Tetrachloride	7550-45-0	1.4E+05	nm	6.0E+05	nm	1.0E-01	n	4.4E-01	n	2.1E-01	n		1.0E+03	7.6E-01	n	6.9E-01
						5.00E+00	I	V					108-88-3	4.9E+03	ns	4.7E+04	ns	5.2E+03	n	2.2E+04	n	1.1E+03	n		2.5E-04	n			
3.90E-02	C	1.10E-05	C	8.00E-06	C	V			1				Toluene-2,4-diisocyanate	584-84-9	6.4E+00	n	2.7E+01	n	8.3E-03	n	3.5E-02	n	1.7E-02	n		2.6E-04	n		
1.80E-01	X			1.00E-04	X				1	0.1			Toluene-2,6-diisocyanate	91-08-7	5.3E+00	n	2.2E+01	n	8.3E-03	n	3.5E-02	n	1.7E-02	n		2.6E-04	n		
				2.00E-04	X				1	0.1			Toluenediamine, 2,3-	2687-25-4	6.3E+00	n	8.2E+01	n					2.0E+00	n		6.2E-04	n		
1.60E-02	P	5.10E-05	C	5.00E-03	P				1	0.1			Toluenediamine, 2,5-	95-70-5	3.0E+00	c**	1.3E+01	c*					4.3E-01	c**		1.3E-04	c**		
						1.00E-04	X				1	0.1		Toluenediamine, 3,4-	496-72-0	6.3E+00	n	8.2E+01	n					2.0E+00	n		6.2E-04	n	
						5.00E-03	P				1	0.1		Toluic Acid, p-	99-94-5	3.2E+02	n	4.1E+03	n					9.0E+01	n		2.3E-02	n	
						4.00E-03	X				1	0.1		Toluidine, o- (Methylaniline, 2-)	95-53-4	3.4E+01	c	1.4E+02	c	5.5E-02	c	2.4E-01	c	4.7E+00	c		2.0E-03	c	
3.00E-02	P			3.00E+00	P				1			3.42E-01	Toluidine, p-	106-49-0	1.8E+01	c*	7.7E+01	c*					2.5E+00	c*		1.1E-03	c*		
				5.00E-03	P	4.00E-01	P	V	1			1.12E+02	Total Petroleum Hydrocarbons (Aliphatic High)	E1790670	2.3E+05	nms	3.5E+06	nms					6.0E+04	n		2.4E+03	n		
				1.00E-02	X	1.00E-01	P	V	1			6.86E+00	Total Petroleum Hydrocarbons (Aliphatic Low)	E1790666	2.5E+02	ns	1.9E+03	ns	4.2E+02	n	1.8E+03	n	2.8E+01	n		2.0E-02	n		
				3.00E-04	P	2.00E-06	P		1	0.13		2.31E+02	Total Petroleum Hydrocarbons (Aliphatic Medium)	E1790668	9.6E+01	ns	4.4E+02	ns	1.0E+02	n	4.4E+02	n	1.0E+02	n		1.5E+00	n		
1.10E+00	I	3.20E-04	I	1.00E-02	P				1	0.1			Total Petroleum Hydrocarbons (Aromatic High)	E1790676	1.8E+01	n	2.2E+02	n	2.1E-03	n	8.8E-03	n	6.0E+00	n		7.1E+00	n		
						3.00E-05	X				1	0.1		Total Petroleum Hydrocarbons (Aromatic Medium)	E1790674	3.0E+02	ns	1.7E+03	ns	6.3E+01	n	2.6E+02	n	5.7E+01	n		8.3E-02	n	
						7.50E-03	I				1	0.1		Toxaphene	8001-35-2	4.9E-01	c*	2.1E+00	c*	8.8E-03	c	3.8E-02	c	7.1E-02	c*	3.0E+00	1.1E-02	c*	4.6E-01
						3.00E-05	X				1	0.1		Toxaphene, Weathered	E1841606	1.9E+00	n	2.5E+01	n					6.0E-01	n		9.3E-02	n	
7.17E-02	O			3.00E-04	A			V	1				Tralometrin	66841-25-6	4.7E+02	n	6.2E+03	n					1.5E+02	n		5.8E+01	n		
				8.00E+01	X				1	0.1		Tri-n-butyltin	688-73-3	2.3E+01	n	3.5E+02	n					3.7E+00	n		8.2E-02	n			
				1.00E-02	I				1	0.1		Triacetin	102-76-1	5.1E+06	nm	6.6E+07	nm					1.6E+06	n		4.5E+02	n			
				8.00E-03	I				1	0.1		Triadimefon	43121-43-3	2.1E+03	n	2.8E+04	n					6.3E+02	n		5.0E-01	n			
9.00E-03	P			2.50E-02	O			V	1				Triallate	2303-17-5	9.7E+00	c	4.6E+01	c					4.7E-01	c		1.0E-03	c		
				1.00E-02	I				1	0.1		Triasulfuron	82097-50-5	6.3E+02	n	8.2E+03	n					2.0E+02	n		2.1E-01	n			
				8.00E-03	I				1	0.1		Tribenuron-methyl	101200-48-0	5.1E+02	n	6.6E+03	n					1.6E+02	n		6.1E-02	n			
				5.00E-03	I			V	1			Tribromobenzene, 1,2,4-	615-54-3	3.9E+02	n	5.8E+03	n					4.5E+01	n		6.4E-02	n			
3.00E+01	I			9.00E-03	X				1	0.1			Tribromophenol, 2,4,6-	118-79-6	5.7E+02	n	7.4E+03	n					1.2E+02	n		2.2E-01	n		
				2.00E-04	O				1	0.1		Tribufos	78-48-8	1.3E+01	n	1.6E+02	n					5.7E-01	n		2.8E-03	n			
				1.00E-02	P				1	0.1		Tributyl Phosphate	126-73-8	6.0E+01	c*	2.6E+02	c*					5.2E+00	c*		2.5E-02	c*			
				3.00E-04	P				1	0.1		Tributyltin Compounds	E1790679	1.9E+01	n	2.5E+02	n					6.0E+00	n		2.9E+02	n			
7.00E-02	I			3.00E+01	I	5.00E+00	P	V	1		9.10E+02	Tributyltin Oxide	56-35-9	1.9E+01	n	2.5E+02	n					5.7E+00	n		2.9E+02	n			
				2.00E-02	I				1	0.1		Trichloramine	10025-85-1	6.7E+03	ns	2.8E+04	ns	5.2E+03	n	2.2E+04	n	1.0E+04	n	4.0E+03(G)	2.6E+01	n			
				2.90E-02	H				1	0.1		Trichloro-1,2,2-trifluoroethane, 1,1,2-	76-13-1	7.8E+00	c	3.3E+01	c					1.1E+00	c	6.0E+01(G)	2.2E-04	c	1.2E-02		
				7.00E-03	X				1	0.1		Trichloroacetic Acid	76-03-9	1.9E+01	c	7.9E+01	c					2.7E+00	c		7.4E-03	c			
2.90E-02	P			3.00E-05	X				1	0.1			Trichloroaniline, 2,4,6-	634-93-5	1.9E+00	n	2.5E+01	n					4.0E-01	n		3.6E-03	n		
				8.00E-04	X			V	1			Trichlorobenzene, 1,2,3-	87-61-6	6.3E+01	n	9.3E+02	n					7.0E+00	n		2.1E-02	n			
				1.00E-02	I	2.00E-03	P	V	1			4.04E+02	Trichlorobenzene, 1,2,4-	120-82-1	2.4E+01	c**	1.1E+02	c**	2.1E+00	n	8.8E+00	n	1.2E+00	c**	7.0E+01	3.4E-03	c**	2.0E-01	
				2.00E+00	I	5.00E+00	I	V	1			6.40E+02	Trichloroethane, 1,1,1-	71-55-6	8.1E+03	ns	3.6E+04	ns	5.2E+03	n	2.2E+04	n	8.0E+03	n	2.0E+02	2.8E+00	n	7.0E-02	
5.70E-02	I	1.60E-05	I	4.00E-03	I	2.00E-04	X	V	1		2.16E+03	Trichloroethane, 1,1,2-	79-00-5	1.1E+00	c**	5.0E+00	c**	1.8E-01	c**	7.7E-01	c**	2.8E-01	c**	5.0E+00	8.9E-05	c**	1.6E-03		
						5.00E-04	I	2.00E-03	I	V	1		6.92E+02	Trichloroethylene	79-01-6	9.4E-01	c**	6.0E+00	c**	4.8E-01	c**	3.0E+00	c**	4.9E-01	c**	5.0E+00	1.8E-04	c**	1.8E-03
						3.00E-01	I			V	1		1.23E+03	Trichlorofluoromethane	75-69-4	2.3E+04	ns	3.5E+05	nms					5.2E+03	n		3.3E+00	n	
						1.00E-01	I				1	0.1		Trichlorophenol, 2,4,5-	95-95-4	6.3E+03	n	8.2E+04	n					1.2E+03	n		4.0E+00	n	
1.10E-02	I	3.10E-06	I	1.00E-03	P				1	0.1			Trichlorophenol, 2,4,6-	88-06-2	4.9E+01	c**	2.1E+02	c**	9.1E-01	c	4.0E+00	c	4.1E+00	c**		4.0E-03	c**		
						1.00E-02	I				1	0.1		Trichlorophenoxyacetic Acid, 2,4,5-	93-76-5	6.3E+02	n	8.2E+03	n					1.6E+02	n		6.8E-02	n	
						8.00E-03	I				1	0.1																	

Key: I = IRIS; P = PPRTV; O = OPP; A = ATSDR; T = ATSDR DRAFT; C = Cal EPA; X = PPRTV Screening Level; H = HEAST; D = OW; R = ORD; N = WI; W = TEF applied; E = RPF applied; G = see user's guide; c = cancer; n = noncancer; * = where: nc SL < 100X ca SL; ** = where nc SL < 10X ca SL; SSL values are based on DAF=1; m = ceiling limit exceeded; s = Csat exceeded; V = volatile; M = mutagen.																											
Toxicity and Chemical-specific Information												Contaminant		Screening Levels										Protection of Groundwater SSLs			
SFO (mg/kg-day) ⁻¹	k e y	IUR (ug/m ³ -y) ⁻¹	k e y	RfD _o (mg/kg-day)	k e y	RfC _i (mg/m ³)	k e y	v o l u t a g e n	GIABS	ABS _d	C _{sat} (mg/kg)	Analyte	CAS No.	Resident Soil (mg/kg)	key	Industrial Soil (mg/kg)	key	Resident Air (ug/m ³)	key	Industrial Air (ug/m ³)	key	Tap Water (ug/L)	key	MCL (ug/L)	Risk-based SSL (mg/kg)	key	MCL-based SSL (mg/kg)
7.20E-01	I	4.40E-06	I	3.00E-03	I	5.11E-02	A	V	M	1	3.92E+03	Vinyl Chloride	75-01-4	5.9E-02	c	1.7E+00	c	1.7E-01	c	2.8E+00	c*	1.9E-02	c	2.0E+00	6.5E-06	c	6.9E-04
				3.00E-04	I					1	0.1	Warfarin	81-81-2	1.9E+01	n	2.5E+02	n					5.6E+00	n		5.9E-03	n	
				2.00E-01	G	1.00E-01	G	V		1	3.88E+02	Xylene, m-	108-38-3	5.5E+02	ns	2.4E+03	ns	1.0E+02	n	4.4E+02	n	1.9E+02	n		1.9E-01	n	
				2.00E-01	G	1.00E-01	G	V		1	4.34E+02	Xylene, o-	95-47-6	6.4E+02	ns	2.8E+03	ns	1.0E+02	n	4.4E+02	n	1.9E+02	n		1.9E-01	n	
				2.00E-01	G	1.00E-01	G	V		1	3.90E+02	Xylene, p-	106-42-3	5.6E+02	ns	2.4E+03	ns	1.0E+02	n	4.4E+02	n	1.9E+02	n		1.9E-01	n	
				2.00E-01	I	1.00E-01	I	V		1	2.60E+02	Xylenes	1330-20-7	5.8E+02	ns	2.5E+03	ns	1.0E+02	n	4.4E+02	n	1.9E+02	n	1.0E+04	1.9E-01	n	9.9E+00
				3.00E-04	I					1		Zinc Phosphide	1314-84-7	2.3E+01	n	3.5E+02	n					6.0E+00	n				
				3.00E-01	I					1		Zinc and Compounds	7440-66-6	2.3E+04	n	3.5E+05	nm					6.0E+03	n		3.7E+02	n	
				5.00E-02	I					1	0.1	Zineb	12122-67-7	3.2E+03	n	4.1E+04	n					9.9E+02	n		2.9E+00	n	
				8.00E-05	X					1		Zirconium	7440-67-7	6.3E+00	n	9.3E+01	n					1.6E+00	n		4.8E+00	n	



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

P.O. Box 1105, Richmond, Virginia 23218

(800) 592-5482

www.deq.virginia.gov

Travis A. Voyles
Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

April 3, 2024

Ms. Laura M. Dickerson
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: Cobalt Alternate Source Demonstration HWMU #5
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Ms. Dickerson:

The above-noted Alternate Source Demonstration (ASD) investigation, submitted on behalf of Radford Army Ammunition Plant, by TRC Engineers, Inc., dated November 2023, has been reviewed for technical content and consistency with the requirements of 40 CFR 264.99.(i). The need to submit an ASD was triggered by an exceedance of the Cobalt Groundwater Protection standard reported to the Department for monitoring wells associated with HWMU #5.

As defined under 40 CFR 264.99.(i), the Alternate Source Demonstration (ASD) report must show one of the following in order to obtain approval:

- 1) The contamination was caused by natural variation in groundwater.
- 2) The contamination was a result of an error in field sampling.
- 3) The contamination was the result of an error in lab analysis.
- 4) The SSI contamination was result of an error in statistical analysis.

The ASD report focused on proving the applicability of item #1 by presenting a statistical trend analysis that shows generally stable to decreasing trends of total cobalt concentrations in groundwater, presenting data showing that cobalt is widely observed at significant concentrations in non-waste derived materials and ASD concentrations observed in groundwater monitoring wells

5W7B, 5WC21, 5WC22 and 5WC23 are derived from ambient, naturally-occurring and naturally variable trace elements in the aquifer matrix, and not from a temporally- varying source such as a release from the closed hazardous waste management unit (HWMU-5).

Based on the above discussion and the body of evidence presented to the Department, the content of the ASD is determined to be insufficient to meet the Regulatory criteria for approval and as a result, the facility will be required to continue to remediate the cobalt GPS exceedances observed in wells 5W7B, 5WC21, 5WC22 and 5WC23.

If you have any additional questions or would like to discuss further, you may contact me at 703-232-4200 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,



Kurt W. Kochan
Office of Remediation Programs

cc: RFAAP Correspondence File
Tara Mason, Sarah Dyer, VDEQ-CO
Nichole Herschler, VDEQ- BRO
Melissa Lincoln, BAE
Mike Lawless, TRC



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

1111 E. Main Street, Suite 1400, Richmond, Virginia 23219

P.O. Box 1105, Richmond, Virginia 23218

(800) 592-5482

www.deq.virginia.gov

Travis A. Voyles
Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

May 8, 2024

Mr. Matt Alberts
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: Annual Groundwater Monitoring Report for
Hazardous Waste Management Units 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. Alberts:

This letter acknowledges the receipt and review of the 2023 Annual Groundwater Monitoring Report (Report) for Hazardous Waste Management Units (HWMU) 5 & 16 dated December 2023, submitted to the Virginia Department of Environmental Quality (Department or DEQ), Office of Remediation Programs (ORP) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

The Department has no comment and accepts the Report as complete. Further, the Department concurs with the proposal to establish a background concentration and groundwater protection standard (GPS) for the newly detected compound silver. RFAAP may utilize historical data from monitoring well 16C1 to establish a background concentration and use the DEQ alternate concentration limit for the GPS as proposed.

EPA ID#: VA1210020730

May 8, 2024

Page 2 of 2

If you have any questions regarding this correspondence, you may contact me at 703-232-4200 or by email at Kurt.Kochan@deq.virginia.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Kurt W. Kochan", with a horizontal line extending to the right.

Kurt W. Kochan
Office of Remediation Programs

cc: RFAAP Correspondence File
Tara Mason, Ashby Scott, DEQ-CO
Laura Dickerson, RFAAP
Melissa Lincoln, BAE
Mike Lawless, TRC

ORDNANCE SYSTEMS INC.
Radford Army Ammunition Plant
4050 Pepper's Ferry Road
Radford Virginia 24141

June 3, 2024

Mr. Kurt Kochan
Office of Remediation Programs
Virginia Department of Environmental Quality
1111 East Main Street, Suite 1400
Richmond, Virginia 23219

Subject: Semiannual and Annual Corrective Action Groundwater Monitoring Event Notification – HWMU-5
Semiannual Detection Notification – HWMU-16
Post Closure Care Permit HWMUs 5 & 16
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730

Dear Mr. Kochan:

The following information pertains to routine detection notification for the recent semiannual groundwater monitoring event for Hazardous Waste Management Units (HWMUs) 5 and 16.

Groundwater Monitoring Event Notification - HWMU-5 and HWMU-16

During Second Quarter 2024, BAE Systems, Ordnance Systems Inc. (BAE) completed semiannual groundwater monitoring for HWMUs 5 and 16 located at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia. The Second Quarter 2024 event served as the semiannual and annual Corrective Action (CA) groundwater monitoring events for HWMU-5 conducted in accordance with the *Final Hazardous Waste Post-Closure Care Permit for HWMUs 5 and 16* (reissued August 16, 2014). The Second Quarter 2024 groundwater monitoring event also served as the semiannual Compliance monitoring event for HWMU-16. The Second Quarter 2024 groundwater monitoring event was conducted using revised detection limits (DLs) and quantitation limits (QLs), where applicable, as specified in the Class 1 Permit Modification approved by the Virginia Department of Environmental Quality (VDEQ) in electronic correspondence dated May 5, 2021 as well as proposed permit limits for total silver, added to the HWMU-16 Compliance Monitoring List Third Quarter 2023 (Class 1 permit modification for total silver pending). Additionally, HWMU-16 total cobalt data were evaluated using the revised alternate source demonstration (ASD) for total cobalt in groundwater at HWMU-16 approved by the VDEQ in electronic correspondence dated September 13, 2021. The following information summarizes the findings of the Second Quarter 2024 semiannual monitoring activities at each Unit.

HWMU-5

For this event, all wells in the CA groundwater monitoring network were sampled for the constituents listed in Appendix J to Permit Attachment 2 (Groundwater Corrective Action Targeted Constituents - GPS and Semiannual Monitoring List for HWMU-5). The CA groundwater monitoring network for HWMU-5 consists of upgradient well 5W8B, point of compliance (POC) wells 5W5B, 5W7B, 5WC21, 5WC22, and 5WC23, and plume monitoring well 5W12A. During Second Quarter 2024, groundwater samples collected from all of the wells in the CA groundwater monitoring network were analyzed for the CA Targeted Constituents: trichloroethene (TCE) and its daughter products 1,1-dichloroethene (1,1-DCE), *cis*-1,2-dichloroethene (*c*DCE), *trans*-1,2-dichloroethene (*t*DCE), and vinyl chloride (VC). Additionally, samples collected from all of the wells in the CA groundwater monitoring network were analyzed for total cobalt, which was added to the list of CA Targeted Constituents as directed by the VDEQ on May 4, 2011.

TCE was detected in POC wells 5WC22 and 5WC23 at concentrations of 1.2 ug/l and 1.5 ug/l, respectively, which are less than the groundwater protection standard (GPS) of 5 ug/l. TCE was detected in POC well 5WC21 at a concentration less than the QL of 1 ug/l.

Lincoln
24-0900-092

Data validation for volatile organics indicated that POC well 5WC23 was analyzed outside the technical holding time. As such, for 5WC23, laboratory results for volatile organics reported as not detected were qualified as rejected and volatile organics reported as detected were qualified as estimated. Due to sample analysis outside the technical holding time, RFAAP intends to resample 5WC23 for all volatile organics on or before June 17, 2024.

Total cobalt was detected in POC wells 5WC21 and 5WC22 at concentrations of 21 ug/l and 11 ug/l, respectively, which are greater than the GPS of 7 ug/l. Total cobalt was detected in POC wells 5W7B and 5WC23 at concentrations less than the QL of 5 ug/l.

TCE and total cobalt were not detected in any of the other wells in the CA groundwater monitoring network. Additionally, TCE daughter products were not detected in any of the wells comprising the CA groundwater monitoring network.

This event also served as the annual monitoring event in which the POC wells at HWMU-5 were sampled for the constituents listed in Appendix K to Permit Attachment 2 (Groundwater Corrective Action Annual Monitoring List). Annual monitoring for the constituents listed in Appendix K is required in order to evaluate whether additional hazardous constituents that are not the targets for the current CA (e.g., TCE and its daughter products) are present at concentrations greater than their respective GPSs. No other additional hazardous constituents that are not targets for the current CA for the Unit were detected at concentrations greater than their respective GPS during Second Quarter 2024.

A footnote presented in Appendix K to Permit Attachment 2 indicates that verification is required for constituents detected at concentrations less than the QL if their associated GPSs are 1) based on background values equal to the QL, and 2) are greater than the applicable risk-based concentrations (i.e., VDEQ Alternate Concentration Limit (ACL) or USEPA Regional Screening Level (RSL)). In these instances, verification must be conducted using an alternate low-level analytical method in order to confirm or refute the observed initial detections if the QL achievable by that method is less than, or equal to, the ACL or RSL for the subject constituent. If a concentration greater than the low-level analytical method QL is observed above the ACL or RSL, then a revised background concentration will be established using the low-level analytical method, if appropriate, and the GPS for that constituent will be updated, if warranted. This applies to p-nitroaniline (a.k.a, 4-nitroaniline) which has a GPS based on a background value equal to the permit-specified QL. P-nitroaniline was not detected at or above the laboratory method detection limit and no further action is needed.

HWMU-16

In accordance with the Permit, the groundwater data from the POC wells at HWMU-16 were compared to the established GPS for the Unit listed in Appendix G of Permit Attachment 3 (modified to add 1,1-dichloroethene in Class 1 Permit Modification approved September 12, 2014; modified to add tetrahydrofuran in Class 1 Permit Modification approved December 1, 2016; modified to add vinyl chloride in Class 1 Permit Modification approved May 5, 2021; modified to add total silver in *pending* Class 1 Permit Modification as directed by VDEQ). The following constituents were detected in the POC wells for HWMU 16 at concentrations greater than their respective GPS:

- Total cobalt was detected in POC well 16WC1A at a concentration of 12 ug/l, which is greater than the Permit-specified GPS of 5 ug/l. Total cobalt was detected in POC well 16MW9 at a concentration of 5 ug/l, which is not greater than the Permit-specified GPS. As directed by the VDEQ in electronic correspondence dated October 26, 2018, RFAAP also compared the total cobalt concentrations in POC wells 16MW9 and 16WC1A to the latest (effective January 1, 2024) ACL for cobalt of 6 ug/l. Additionally, the total cobalt data were evaluated using the revised ASD for total cobalt in groundwater at HWMU-16 for POC wells 16MW9, 16WC1A, and 16WC1B approved by the VDEQ in electronic correspondence dated September 13, 2021. Based on the conclusions of the VDEQ-approved ASD, the Second Quarter 2024 total cobalt concentrations detected in POC wells 16MW9 and 16WC1A appear to be consistent with natural variation in local groundwater and are not indicative of a release from the Unit. Therefore, a verification event will not be conducted for the Second Quarter 2024 total cobalt concentration detected greater than the Permit-specified GPS in POC well 16WC1A. As well, based on VDEQ correspondence dated September 13, 2021,

a separate ASD will not be required. Total cobalt was not detected at concentrations greater than the Permit-specified GPS or the latest VDEQ ACL in the other POC wells during Second Quarter 2024.

No other constituents were detected in the upgradient well or in the POC wells at concentrations greater than their respective GPS during Second Quarter 2024.

The following constituents were detected at concentrations greater than their respective background concentrations in plume monitoring wells:

- Total barium was detected in plume monitoring wells 16-2, 16-3, and 16Spring at concentrations of 230 ug/l, 720 ug/l, and 210 ug/l, respectively, which are greater than the site-specific background concentration of 175.4 ug/l. However, these concentrations are less than the USEPA maximum contaminant level (MCL) drinking water standard for barium of 2,000 ug/l. Higher total barium concentrations in downgradient plume monitoring wells relative to background at HWMU-16 may be the result of natural variations in trace element distribution in groundwater. As illustrated in the boring logs for the compliance network monitoring wells (Appendix H of Permit Attachment 3), upgradient well 16C1 is screened in limestone while downgradient plume monitoring wells (16-2, 16-3, and 16-5) and former plume well (now piezometer) 16-1 are screened in shale and fault breccia. Such differing lithologic formations would be expected to contain very different trace element distributions. Therefore, no further action regarding the Second Quarter 2024 total barium concentrations detected in plume monitoring wells 16-2, 16-3, and 16Spring is recommended at this time.

Total barium was detected in plume monitoring wells 16-5 and 16WC2B at concentrations of 170 ug/l and 110 ug/l, respectively, which are less than the site-specific background concentration of 175.4 ug/l. No other constituents were detected in the plume monitoring wells at concentrations greater than their respective Permit-specified QLs.

A footnote presented in Appendix G of Permit Attachment 3 indicates that verification is required for constituents detected at concentrations less than the QL if their associated GPS are equal to the QL and are greater than the applicable risk-based concentrations (i.e., ACL or RSL). In these instances, verification must be conducted using an alternate low-level analytical method in order to confirm or refute the observed initial detections if the QL achievable by that method is less than, or equal to, the ACL or RSL for the subject constituent. If a concentration greater than the low-level analytical method QL is observed, then the GPS for that constituent will be updated, if warranted. During Second Quarter 2024, no constituents with GPS equal to their respective QLs and greater than the applicable risk-based concentrations were detected at concentrations less than their respective QLs based on review of associated instrument data; therefore, no further action was warranted. This applied to 2,4-dinitrotoluene and 2,6-dinitrotoluene.

To summarize, HWMU-5 POC well 5WC23 will be resampled and analyzed for volatile organics due to sample analysis outside the technical holding time resulting in rejected volatile organic data. The resampling event for 5WC23 will occur prior to June 17, 2024 with subsequent VDEQ notification.

Complete details regarding the Second Quarter 2024 monitoring event (field data, laboratory data, and data validation reports) will be forwarded to the VDEQ in the forthcoming *Semiannual Groundwater Monitoring Report for Hazardous Waste Management Units 5 and 16, Second Quarter 2024*, which is due by August 15, 2024.

If you have any questions or concerns, please contact me at 540/639-7087 (Melissa.Lincoln@baesystems.us).

Sincerely,

**Melissa
Lincoln**

Melissa Lincoln
Environmental Specialist
BAE Systems, Ordnance Systems Inc.

Digitally signed by
Melissa Lincoln
Date: 2024.06.05
10:46:56 -04'00'

Coordination:

ALBERTS.MATTHEW
W.JOHN.16195746
36
M. Alberts

Digitally signed by
ALBERTS.MATTHEW.JOHN.161
9574636
Date: 2024.06.05 12:19:20 -04'00'

Lincoln
24-0900-092

Kurt Kochan
June 3, 2024
Page 4

cc: Nikki Herschler, VDEQ-BRRO
 Tara Mason, Ashby Scott, VDEQ-CO
 Nelson Hernandez, BAE Staff
 Mike Lawless, TRC, Engineers, Inc. (formerly Draper Aden Associates)
 Janet Frazier, TRC, Engineers, Inc. (formerly Draper Aden Associates)
 William Mason-Deese, TRC, Engineers, Inc. (formerly Draper Aden Associates)

Env. File

Concerning the following:

*CY 2024 Second Quarter Semiannual Monitoring Event
Hazardous Waste Management Units 5 – Corrective Action Groundwater Monitoring
Hazardous Waste Management Unit 16 – Compliance Groundwater Monitoring
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730*

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

SIGNATURE:

HUMPHREYS.ADR
EN.GERMAINE.118
1439641

Digitally signed by
HUMPHREYS.ADR
EN.GERMAINE.118
Date: 2024.06.06 14:55:25 -04'00'

PRINTED NAME:

Adrien G. Humphreys

TITLE:

Lieutenant Colonel, US Army
Commanding

SIGNATURE:

Aron Theroux

Digitally signed by Aron
Theroux
Date: 2024.06.06
12:59:01 -04'00'

PRINTED NAME:

Aron Theroux

TITLE:

General Manager
BAE Systems

ORDNANCE SYSTEMS INC.
Radford Army Ammunition Plant
4050 Pepper's Ferry Road
Radford Virginia 24141

June 18, 2024

Mr. Kurt Kochan
Office of Remediation Programs
Virginia Department of Environmental Quality
1111 East Main Street, Suite 1400
Richmond, Virginia 23219

Subject: HWMU- 5 Resampling of POC well 5WC23 for volatile organic constituents
Final Semiannual and Annual Corrective Action Groundwater Monitoring Event Notification
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730

Dear Mr. Kochan:

The following information pertains to detection notification for the resampling event at Hazardous Waste Management Unit (HWMU) 5 Point of Compliance (POC) well 5WC23 for volatile organic constituents. The resampling was conducted as part of the recent Second Quarter 2024 groundwater monitoring event associated with Hazardous Waste Management Units (HWMUs) 5 and 16 located at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia. Notification for the Second Quarter 2024 semiannual and annual Corrective Action (CA) groundwater monitoring event was previously submitted and this correspondence regarding the resampling event for POC well 5WC23 completes the required event notification for Second Quarter 2024.

Data validation for initial volatile organic constituent results indicated that POC well 5WC23 was analyzed outside the technical holding time. As such, RFAAP resampled POC well 5WC23 for all volatile organic constituents on June 5, 2024. Final laboratory results were received on June 11, 2024.

For the Second Quarter 2024 resampling event, POC well 5WC23, the associated blind field duplicate and a trip blank were analyzed for the volatile organic constituents listed in Appendix J to Permit Attachment 2 (Groundwater Corrective Action Targeted Constituents - GPS and Semiannual Monitoring List for HWMU-5). Trichloroethene (TCE) was detected in POC well 5WC23 and the associated blind field duplicate at concentrations of 1.7 ug/L and 1.6 ug/l, respectively, which are less than the groundwater protection standard (GPS) of 5 ug/l. TCE daughter products were not detected in POC well 5WC23 or the associated blind field duplicate during the resampling event.

Additionally, POC well 5WC23, the associated blind field duplicate and a trip blank were analyzed for the volatile organic constituents listed in Appendix K to Permit Attachment 2 (Groundwater Corrective Action Annual Monitoring List). Annual monitoring for the constituents listed in Appendix K is required in order to evaluate whether additional hazardous constituents that are not the targets for the current CA (e.g., TCE and its daughter products) are present at concentrations greater than their respective GPSs. No other additional volatile organic hazardous constituents that are not targets for the current CA for the Unit were detected at concentrations greater than their respective GPS during the resampling event.

No additional action is required for the Second Quarter 2024 groundwater monitoring event which includes the recent resampling event of POC well 5WC23. Complete details regarding the Second Quarter 2024 monitoring event (field data, laboratory data, and data validation reports) will be forwarded to the Virginia Department of Environmental Quality (VDEQ) in the forthcoming *Semiannual Groundwater Monitoring Report for Hazardous Waste Management Units 5 and 16, Second Quarter 2024*, which is due by August 15, 2024.

If you have any questions or concerns, please contact me at 540/639-7087 (Melissa.Lincoln@baesystems.us).

Lincoln
24-0900-099

Kurt Kochan
June 18, 2024
Page 2

Sincerely,

**Melissa
Lincoln**

Melissa Lincoln
Environmental Specialist
BAE Systems, Ordnance Systems Inc.

Digitally signed by
Melissa Lincoln
Date: 2024.06.18
08:54:50 -04'00'

Coordination:

ALBERTS.MATTHEW.JOHN.16195746
36
M. Alberts

Digitally signed by
ALBERTS.MATTHEW.JOHN.161
9574636
Date: 2024.06.18 09:21:58 -04'00'

cc: Nikki Herschler, VDEQ-BRRO
Tara Mason, Ashby Scott, VDEQ-CO
Nelson Hernandez, BAE Staff
Mike Lawless, TRC, Engineers, Inc. (formerly Draper Aden Associates)
Janet Frazier, TRC, Engineers, Inc. (formerly Draper Aden Associates)
William Mason-Deese, TRC, Engineers, Inc. (formerly Draper Aden Associates)

Env. File

Concerning the following:

*CY 2024 Second Quarter Semiannual Monitoring Event
Hazardous Waste Management Units 5 – Corrective Action Groundwater Monitoring-
5WC23 Resampling Event- Volatile Organic Constituents
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730*

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

SIGNATURE:

HUMPHREYS.ADR
EN.GERMAINE.118
1439641

Digitally signed by
HUMPHREYS.ADR
EN.GERMAINE.118
NE.1181439641
Date: 2024.06.18 12:37:27 -04'00'

PRINTED NAME:

Adrien G. Humphreys

TITLE:

Lieutenant Colonel, US Army
Commanding

SIGNATURE:

Aron Theroux

Digitally signed by Aron
Theroux
Date: 2024.06.18
10:20:07 -04'00'

PRINTED NAME:

Aron Theroux

TITLE:

General Manager
BAE Systems

ORDNANCE SYSTEMS INC.
 Radford Army Ammunition Plant
 4050 Pepper's Ferry Road
 Radford Virginia 24141

August 9, 2024

Mr. Kurt Kochan
 Office of Remediation Programs
 Virginia Department of Environmental Quality
 1111 East Main Street, Suite 1400
 Richmond, Virginia 23219

**Subject: Semiannual Groundwater Monitoring Report –
 HWMU-5 and HWMU-16
 Post Closure Care Permit HWMUs 5 & 16
 Radford Army Ammunition Plant, Radford, Virginia
 EPA ID#: VA1210020730**

Dear Mr. Kochan:

The Hazardous Waste Management Units (HWMUs) 5 & 16 Semiannual Groundwater Monitoring Report for Second Quarter 2024 can be accessed at:

File 1 of 4

[File 1 of 4 - RPT - 24 0801 - HWMUs 5-16 SA GW Mon Rpt - 2Q 2024](#)

File 2 of 4

Please click the following link to download your files:

<https://nam10.safelinks.protection.outlook.com/?url=https%3A%2F%2Fu39270745.ct.sendgrid.net%2F%2Fclick%3Fupn%3Du001.r3Ub5tJapbroc-2BoR3pDpMutijDYs4A-2B589KdAsKs13F19M3cpuOtQjWGFMc7MM7R8mY3F9oAiMYpwt0fiMECsDGB64FF7NrXBwLRffLppIUlOrBvA-2BmX9511byk2-2Fqz2TfNkGRkNRRuA3Ew5KtYEuodoy1mlkCR5OPskhuVGOa4Yy0DivNnJt0-2Bsng4-2FvOTU23X378fKmJ36T6a11Jnn1pkMc4pmQsZBU18IN8tltktk8XAuWdQw5f5CencUDR0kBMhO4Sqy7AmpfQwiaw-3D-3DuNFX U1DwBosgdOupfGWMY-2FbHALwvH1tZhh065sjitOLm6RTV-2BpyWOIZISOaQ3p20csPtvpgsBGiwMVlarUsHd86ZDHZvp-2BW3DBHqKImuVOSTpM-2Fb1PDMAeQ3gbeRKNTQLK5JH3jTB5KqJ4CkptSHLE3t3vxJcdEazXfIMJe2gDc74uOYOVLn4aZ820TqMDUsH0em2xwnFGgalhFLQhixougzw-3D-3D&data=05%7C02%7Cifrazier%40trccompanies.com%7Cd63f25cb30074e5ff9b308dcb266b444%7C543eaf7b7e0d4076a34d1fc8cc20e5bb%7C0%7C0%7C638581401401315477%7CUnknown%7CTWFpbGZsb3d8eyJWljojMC4wLjAwMDAiLCQljojV2luMzliLCBtil6k1haWwiLCJXVCi6Mn0%3D%7C0%7C%7C%7C&sdata=%2Fyx%2B3VxAlOfOHmmOyx2VT3eQHJHwJ30rnQn%2Fyazxmf%3D&reserved=0>

File 3 of 4

Please click the following link to download your files:

<https://nam10.safelinks.protection.outlook.com/?url=https%3A%2F%2Fu39270745.ct.sendgrid.net%2F%2Fclick%3Fupn%3Du001.r3Ub5tJapbroc-2BoR3pDpMutijDYs4A-2B589KdAsKs13F19M3cpuOtQjWGFMc7MM7R8mY3F9oAiMYpwt0fiMECsDGB64FF7NrXBwLRffLppniQLqallbkcd6lzTDKHz8RZCR5f1AxSRQb1a-2BaY4WKHWkY63bdYPa5d-2BwuOeGnSLG2Gom0GnuQQcJvMZHGUQMIPlp4RAZub2K9bsgpX-2B7c-2Fyp6jL31c5nUfUjT5iaACBRt0XHOpU3Kv6KSVUxUCQvLgNY1YxYfc31adji8p2klw-3D-3DY04f U1DwBosgdOupfGWMY-2FbHALwvH1tZhh065sjitOLm6RQbTQSVOMm8r-2FBRityWjmeGQjoe6JODuPBk1Q8POB9SKjo0czkCIGf-2FBzHDmgMy5SeGirJhjn747R0SHH761ppiPWmzCTf1gt-2FduGiyceQEPQdPisFu8Ce4pew-2Ft-2B2f1c2Mu8wdXwsHDBolMIZdAsaCuDg-2FZzQhLoE8kYdr664g-3D-3D&data=05%7C02%7Cifrazier%40trccompanies.com%7C2fc9e9c94ac74223311108dcb266e4aa%7C543eaf7b7e0d4076a34d1fc8cc20e5bb%7C0%7C0%7C638581402227155096%7CUnknown%7CTWFpbGZsb3d8eyJWljojMC4wLjAwMDAiLCQljojV2luMzliLCBtil6k1haWwiLCJXVCi6Mn0%3D%7C0%7C%7C%7C&sdata=Wmb2pAn3rErsJc3l9DAtQm%2Fqwl5D7HqXgzdB%2FNP54fc%3D&reserved=0>

File 4 of 4

Please click the following link to download your files:

https://nam10.safelinks.protection.outlook.com/?url=https%3A%2F%2Fu39270745.ct.sendgrid.net%2F%2Fclick%3Fupn%3Du001.r3Ub5tJapbroc-2BoR3pDpMutijDYs4A-2B589KdAsKsI13F19M3cpuOtQjWGfMc7MM7R8mY3F9oAjMYpwt0fiMECsDGB64FF7NrXBwLRffLppnWTOliR6epdoMwe1ItLg7loGrQ-2FQQ3fVc8bxR-2BbhDMSgK6Mf5I5-2BXC9eR-2BNdMjOQM95vP6Nr3awiK4aSvtTqduw11MZD6yD3-2B-2Fs43k-2BdhKaravm-2B2VFZH9ihVQj3rILNnn8tPSmyHt7tZdCnxMMS7FilegnPtegmamZ-2BFHq1EqKw-3D-3D31zG_U1DwBosgdOupfGWMMy-2FbHALwvH1tZhh065sjitOLm6RQKq08KG0r4FebRElpTZlco4u8ChPuiaz-2FCpsBn48Se5LAIDL4I3BfbwAHR-2Bpr7ZFb5-2F99tk3-2BNd-2FOi-2BjvcSDpp6I1UIkq9Dg5LD2whFLM3L91PuGxpbPL-2BNswiQFfiTWx0mNVzNKZGFECBywcv0aKaH2AB2QbOW90-2BLwyi2QddXg-3D-3D&data=05%7C02%7Cifrazier%40trccompanies.com%7Cdfb16ba3e2a64256586308dcb266fc30%7C543eaf7b7e0d4076a34d1fc8cc20e5bb%7C0%7C0%7C638581402595544022%7CUnknown%7CTWFpbGZsb3d8eyJWljoimC4wLjAwMDAiLCJQIjoiv2luMzliLCJBTil6lk1haWwiLCJXVCi6Mn0%3D%7C0%7C%7C&sdata=%2B0QTPic4WQtkUwaA3EmEFhkGdAXGrUXfSVD5DT5PpC8%3D&reserved=0

The above links are valid for 20 days. This report meets the requirements of the Semiannual Groundwater Monitoring Report for Second Quarter 2024 for the Post-Closure Care Permit for HWMU 5 and 16 at RFAAP.

If you have any questions or concerns, please contact me at 540/639-7087 (Melissa.lincoln@baesystems.us).

Sincerely,

**Melissa
Lincoln**

Digitally signed by
Melissa Lincoln
Date: 2024.08.09
13:44:12 -04'00'

Melissa Lincoln
Environmental Specialist
BAE Systems, Ordnance Systems Inc.

Coordination:

ALBERTS.MATTHEW
W.JOHN.16195746
36
M. Alberts

Digitally signed by
ALBERTS.MATTHEW.JOHN.161
9574636
Date: 2024.08.12 06:28:04 -04'00'

cc: Nikki Herschler, VDEQ- BRRO
Tara Mason, Ashby Scott, VDEQ-CO
M. Alberts, Army Staff
Nelson Hernandez, BAE Staff
Mike Lawless, TRC Engineers, Inc (formerly Draper Aden Associates)
Janet C. Frazier, TRC Engineers, Inc (formerly Draper Aden Associates)
William Mason-Deese, TRC Engineers, Inc (formerly Draper Aden Associates)
Env. File

Concerning the following:

*CY 2024 Second Quarter Semiannual Groundwater Monitoring Event
Hazardous Waste Management Units 5 – Correction Action Groundwater Monitoring
Hazardous Waste Management Unit 16 – Compliance Groundwater Monitoring
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730*

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

SIGNATURE: HUMPHREYS.ADR
EN.GERMAINE.118
1439641 Digitally signed by
HUMPHREYS.ADR
EN.GERMAINE.118
NE.1181439641
Date: 2024.08.13 15:14:55 -04'00'

PRINTED NAME: Adrien G. Humphreys
TITLE: Lieutenant Colonel, US Army
Commanding

SIGNATURE: Aron Theroux Digitally signed by Aron
Theroux
Date: 2024.08.12
17:23:18 -04'00'

PRINTED NAME: Aron Theroux
TITLE: General Manager
BAE Systems

ORDNANCE SYSTEMS INC.
Radford Army Ammunition Plant
4050 Pepper's Ferry Road
Radford Virginia 24141

September 9, 2024

Mr. Kurt Kochan
Office of Remediation Programs
Virginia Department of Environmental Quality
1111 East Main Street, Suite 1400
Richmond, Virginia 23219

Subject: Semiannual Corrective Action Groundwater Monitoring Event Notification – HWMU-5
Semiannual and Annual Compliance Groundwater Monitoring Event Notification – HWMU-16
Post Closure Care Permit HWMUs 5 & 16
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730

Dear Mr. Kochan:

The following information pertains to routine detection notification for the recent groundwater monitoring event for Hazardous Waste Management Units (HWMUs) 5 and 16 located at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia.

Groundwater Monitoring Event Notification - HWMU-5 and HWMU-16

During Third Quarter 2024, BAE Systems, Ordnance Systems Inc. (BAE) completed groundwater monitoring for HWMUs 5 and 16 in accordance with the *Final Hazardous Waste Post-Closure Care Permit for HWMUs 5 and 16* (reissued August 16, 2014). The Third Quarter 2024 event served as the semiannual Corrective Action (CA) groundwater monitoring event for HWMU-5 and the semiannual compliance groundwater monitoring event for HWMU-16. The Third Quarter 2024 event also served as the annual compliance groundwater monitoring event under 40 CFR 264 Appendix IX for HWMU-16. The final laboratory analytical data packages for this event were received on September 3, 2024. The Third Quarter 2024 groundwater monitoring event was conducted using revised detection limits (DLs) and quantitation limits (QLs), where applicable, as specified in the Class 1 Permit Modification approved by the Virginia Department of Environmental Quality (VDEQ) in electronic correspondence dated May 5, 2021, as well as proposed permit limits for total silver, added to the HWMU-16 Compliance Monitoring List Third Quarter 2023 (as directed by VDEQ in correspondence dated May 8, 2024). Additionally, HWMU-16 total cobalt data were evaluated using the revised alternate source demonstration (ASD) for total cobalt in groundwater at HWMU-16 approved by the VDEQ in electronic correspondence dated September 13, 2021. The following information summarizes the findings of the Third Quarter 2024 semiannual activities at each Unit.

HWMU-5

For this event, all wells in the CA groundwater monitoring network were sampled for the constituents listed in Appendix J to Permit Attachment 2 (Groundwater Corrective Action Targeted Constituents - GPS and Semiannual Monitoring List for HWMU-5). The CA groundwater monitoring network for HWMU-5 consists of upgradient well 5W8B, point of compliance (POC) wells 5W5B, 5W7B, 5WC21, 5WC22, and 5WC23, and plume monitoring well 5W12A. During Third Quarter 2024, groundwater samples collected from all of the wells in the CA groundwater monitoring network were analyzed for the CA Targeted Constituents: trichloroethene (TCE) and its daughter products 1,1-dichloroethene (1,1-DCE), *cis*-1,2-dichloroethene (*c*DCE), *trans*-1,2-dichloroethene (*t*DCE), and vinyl chloride (VC). Additionally, samples collected from all of the wells in the CA groundwater monitoring network were analyzed for total cobalt, which was added to the list of CA Targeted Constituents as directed by the VDEQ on May 4, 2011.

TCE was detected in POC wells 5WC21, 5WC22 and 5WC23 at concentrations of 1.1 micrograms per liter (ug/l), 1.1 ug/l and 1.3 ug/l respectively, which are less than the groundwater protection standard (GPS) of 5 ug/l.

Total cobalt was detected in POC well 5WC21 at a concentration of 22 ug/l which is greater than the GPS of 7 ug/l. Total cobalt was detected in POC well 5WC22 at a concentration of 5.6 ug/l which is less than the GPS of 7 ug/l. Total cobalt was detected in POC well 5W7B at a concentration less than the QL of 5 ug/l.

TCE and total cobalt were not detected in any of the other wells in the CA groundwater monitoring network. Additionally, the TCE daughter products were not detected in any of the wells comprising the CA groundwater monitoring network.

As stated in the Annual Groundwater Monitoring Reports for the Unit for calendar years 2015 through 2023, TCE remedial endpoints have been achieved. During Second and Third Quarters 2024, TCE was not detected at concentrations greater than its GPS in any of the wells comprising the CA groundwater monitoring network for HWMU-5. Additionally, no daughter products of TCE were detected in any of the wells comprising the CA groundwater monitoring network for HWMU-5; therefore, TCE remedial objectives continue to be met. However, total cobalt continued to be detected at concentrations greater than its GPS during Second and Third Quarters 2024.

No changes to the continuation of the groundwater CA program are anticipated at this time. An evaluation of the effectiveness of the Corrective Action will be presented in the forthcoming Annual Groundwater Monitoring Report for Units 5 and 16, which is due to the VDEQ on March 1, 2025.

HWMU-16

In accordance with the Permit, the groundwater data from the POC wells at HWMU-16 were compared to the established GPS for the Unit listed in Appendix G of Permit Attachment 3 (modified to add 1,1-dichloroethene, tetrahydrofuran, and vinyl chloride in Class 1 Permit Modifications approved September 12, 2014, December 1, 2016, and May 5, 2021, respectively, and modified to add total silver as directed by VDEQ as noted above). The following constituents were detected in the POC wells for HWMU-16 at concentrations greater than their respective GPS:

- Total cobalt was detected in POC wells 16MW9 and 16WC1A at concentrations of 5.1 ug/l and 10 ug/l, respectively, which are greater than the GPS of 5 ug/l. As directed by the VDEQ in electronic correspondence dated October 26, 2018, RFAAP also compared the total cobalt concentrations detected in POC wells 16MW9 and 16WC1A to the latest (effective January 1, 2024) VDEQ Alternate Concentration Limit (ACL) for cobalt of 6 ug/l. Additionally, the total cobalt data were evaluated using the revised ASD for total cobalt in groundwater at HWMU-16 for POC wells 16MW9, 16WC1A, and 16WC1B approved by the VDEQ in electronic correspondence dated September 13, 2021. Based on the conclusions of the VDEQ-approved ASD, the Third Quarter 2024 total cobalt concentrations detected in POC wells 16MW9 and 16WC1A appear to be consistent with natural variation in local groundwater and are not indicative of a release from the Unit. Therefore, a verification event will not be conducted for the Third Quarter 2024 total cobalt concentrations detected in POC wells 16MW9 and 16WC1A. As well, based on VDEQ correspondence dated September 13, 2021, a separate ASD will not be required.

No other constituents were detected in the upgradient well or in the POC wells at concentrations greater than their respective GPS during Third Quarter 2024.

The following constituents were detected at concentrations at or above their respective background concentrations in plume monitoring wells:

- Total barium was detected in plume monitoring wells 16-2, 16-3, and 16Spring at concentrations of 220 ug/l, 720 ug/l, and 200 ug/l, respectively, which are greater than the site-specific background concentration of 175.4 ug/l. However, these concentrations are less than the USEPA maximum contaminant level (MCL) drinking water standard for barium of 2,000 ug/l. Higher total barium concentrations in downgradient plume monitoring wells relative to background at HWMU-16 may be the result of natural variations in trace element distribution in groundwater. As illustrated in the boring logs for the compliance network monitoring wells (Appendix H of Permit Attachment 3), upgradient well 16C1 is screened in limestone while downgradient plume monitoring wells (16-2, 16-3, and 16-5) are screened in shale and fault breccia. Such differing lithologic formations would be expected to contain very different trace element

distributions. Therefore, no further action regarding the Third Quarter 2024 total barium concentrations detected in plume monitoring wells 16-2, 16-3, 16Spring is recommended at this time.

Total barium was detected in plume monitoring wells 16-5 and 16WC2B at a concentration of 160 ug/l and 110 ug/l, respectively, which are less than the site-specific background concentration of 175.4 ug/l. No other constituents were detected in the plume monitoring wells at concentrations greater than their respective Permit-specified QLs.

This event also served as the annual monitoring event in which the upgradient and POC wells at HWMU-16 were sampled for the 40 CFR Part 264 Appendix IX constituents listed in Appendix I of Permit Attachment 1. During the Third Quarter 2024 event, no Appendix IX constituents were detected at or above the respective Permit-specified MDLs. As such, no verification event is required.

Complete details regarding the Third Quarter 2024 monitoring event (field data, laboratory data, and data validation reports) will be forwarded to the VDEQ in the forthcoming *Semiannual Groundwater Monitoring Report for Hazardous Waste Management Units 5 and 16, Third Quarter 2024*, which will be combined with the 2024 Annual Groundwater Monitoring Report for the Units as directed by VDEQ on May 4, 2011. The 2024 Annual Groundwater Monitoring Report is due to VDEQ by March 1, 2025.

If you have any questions or concerns, please contact me at 540/639-7087 (Melissa.Lincoln@baesystems.us).

Sincerely,

**Melissa
Lincoln**

Digitally signed by
Melissa Lincoln
Date: 2024.09.09
07:55:03 -04'00'

Melissa Lincoln
Environmental Specialist
BAE Systems, Ordnance Systems Inc.

Coordination:

ALBERTS.MATTHEW.JOHN.1619574636
36
M. Alberts

Digitally signed by
ALBERTS.MATTHEW.JOHN.161
9574636
Date: 2024.09.09 08:56:02 -04'00'

cc:

Nikki Herschler, VDEQ-BRRO
Tara Mason, Ashby Scott, VDEQ-CO
M. Alberts, Army Staff
Nelson Hernandez, BAE Staff
Mike Lawless, TRC Engineers, Inc. (formerly Draper Aden Associates)
Janet C. Frazier, TRC Engineers, Inc. (formerly Draper Aden Associates)
Will Mason-Deese, TRC Engineers, Inc. (formerly Draper Aden Associates)
Env. File

Concerning the following:

*CY 2024 Third Quarter Semiannual and Annual Monitoring Event – Event Notification
Hazardous Waste Management Units 5 – Corrective Action Groundwater Monitoring
Hazardous Waste Management Unit 16 – Compliance Groundwater Monitoring
Radford Army Ammunition Plant, Radford, Virginia
EPA ID#: VA1210020730*

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

SIGNATURE:

DAVIE.ROBERT
N.III.1066962306
Digitally signed by
DAVIE.ROBERT.N.III.106696230
6
Date: 2024.09.10 14:38:18 -04'00'

PRINTED NAME:

Adrien G. Humphreys

TITLE:

Lieutenant Colonel, US Army
Commanding

SIGNATURE:

Aron Theroux
Digitally signed by Aron
Theroux
Date: 2024.09.09
13:30:23 -04'00'

PRINTED NAME:

Aron Theroux

TITLE:

General Manager
BAE Systems



Commonwealth of Virginia

VIRGINIA DEPARTMENT OF ENVIRONMENTAL QUALITY

www.deq.virginia.gov

Travis A. Voyles
Secretary of Natural and Historic Resources

Michael S. Rolband, PE, PWD, PWS Emeritus
Director
(804) 698-4020

September 23, 2024

Mr. Matt Alberts
Radford Army Ammunition Plant
Route 114, P.O. Box 1
Radford, Virginia 24143-0100

VIA ELECTRONIC MAIL

**Re: Semiannual Groundwater Monitoring Report for
Hazardous Waste Management Units 5 & 16
Radford Army Ammunitions Plant
Route 114, Radford, Virginia 24141
EPA ID#: VA1210020730**

Dear Mr. Alberts:

This letter acknowledges the receipt and review of the 2024 Semiannual Groundwater Monitoring Report (Report) for Hazardous Waste Management Units (HWMU) 5 & 16 dated August 2024, submitted to the Virginia Department of Environmental Quality (Department or DEQ), Office of Remediation Programs (ORP) by BAE Systems on behalf of the Radford Army Ammunitions Plant (RFAAP).

The Department has no comments on the Report. If you have any questions regarding this correspondence, you may contact me at the email address or phone number listed below.

Sincerely,

A handwritten signature in black ink, appearing to read "Kurt Kochan".

Kurt Kochan, Remediation Project Manager
Virginia Department of Environmental Quality
Central Office
1111 E. Main Street, Suite 1400
Richmond, VA 23219
kurt.kochan@deq.virginia.gov
Direct: 703-232-4200

cc: RFAAP Correspondence File
Melissa Lincoln, BAE
Tara Mason, DEQ-CO

To: file

From: Will Mason-Deese, Project Manager/Team Leader, TRC

Date: December 31, 2024

Project Name: RFAAP - HWMU 16 – Well 16WC1B- new pump 2024

Project Number: 547076

Subject: New Pump at 16WC1B

This memorandum summarizes efforts associated with purchase and installation of a new bladder pump at Hazardous Waste Management Unit (HWMU) 16 – groundwater monitoring well 16WC1B, at the Radford Army Ammunition Plant (RFAAP) in Radford, Virginia.

Background: On October 18, 2023, TRC Engineers, Inc. (TRC) on behalf of BAE, conducted a verification event as part of routine groundwater monitoring services at HWMU 16. During the event, TRC field personnel observed that the dedicated bladder pump at monitoring well 16WC1B was malfunctioning. TRC field personnel subsequently pulled the pump in well 16WC1B to diagnose the malfunctioning pump. TRC field personnel determined that the bladder in the pump was compromised. The manufacturer of the pump is no longer in existence; therefore, a replacement bladder cannot be obtained, and the pump required replacement.

The following summarizes activities conducted with this task per RFP RFAC-050323-01-MJP Mod 3:

Pump Replacement, Installation and Equipment Blank:

Pump Replacement and installation:

- A replacement bladder pump was purchased for installation in point of compliance well 16WC1B. The purchased replacement pump was equivalent to the original pump and to the remaining pumps at the unit. The pump was purchased subsequent to the 2024 groundwater monitoring events.
- Pump description: dedicated stainless steel Solinst Model 407 bladder pump with stainless steel housing and PTFE bladder. See attachment for manufacture specifications.
- Although Per- and polyfluoroalkyl substances (PFAS) are not currently a constituent of concern for the facility (COC), the bladder pump and HDPE tubing were certified by the respective manufacturer to be PFAS-free.



- An equipment blank was analyzed prior to the new pump installation as discussed below. The new pump at 16WC1B was installed in December 2024. The pump intake was deployed to the middle of the well's screened interval.
- A dedicated well cap was also purchased and installed.
- Total Depth: 75.15 feet
- Depth that the pump was installed: 72 feet

Equipment Blank:

TRC personnel cleaned and decontaminated the new bladder pump and collected an equipment blank prior to the pump installation. The equipment blank, collected on October 10, 2024, was submitted to the laboratories noted below. Multiple laboratories were required due to the Unit's extensive analyte list. The equipment blank sample was analyzed for the HWMU 16 Annual Groundwater Monitoring list (i.e., semiannual monitoring constituents listed in Permit Attachment 3, Appendix E – Groundwater Compliance Monitoring Constituent List and 40 CFR Part 264 Appendix IX constituents listed in Appendix I of Permit Attachment 1 of the Final Post-Closure Care Permit). The equipment blank sample was analyzed by SW-846 Method requirements (Test Methods for Evaluating Solid Wastes - Physical and Chemical Methods, USEPA SW-846, 3rd edition - Final Update I, II/IIA, III and subsequent updates). SW-846 analytical methods used consisted of: 8260C/D, 8270E, 6020B, 9012B and 7470A. Sample containers were properly preserved (specific to the analytical method). The respective sample aliquots were shipped on ice in a cooler under chain of custody via UPS for next-day delivery to the respective laboratories listed below. Each laboratory was accredited under the Virginia Environmental Laboratory Accreditation Program for the matrix, method and analyte reported, where applicable.

1. Eurofins Lancaster Laboratories Environmental, LLC (ELLE) of Lancaster, Pennsylvania (all methods)
2. Eurofins Cleveland, (ETAC) of Barberton, Ohio (8260/8270)
3. Enthalpy Analytical, LLC (Enthalpy), of Richmond, Virginia (8270)
4. GEL Laboratories (GEL), of Charleston, South Carolina (8270)

The equipment blank results indicated the presence of low levels of select volatile organic compounds (VOCs/8260). The observed detections appeared to indicate insufficient rinsing with distilled water following cleaning. As a result, TRC re-cleaned the new pump prior to installation. The new pump was installed in December 2024. Laboratory results associated with the equipment blank sample are presented in Appendix C of the 2024 Annual Groundwater Report for the Unit.

Attachments:

- Pump Specifications
- PFAS Statement



Bladder Pump

Model 407

The Solinst Bladder Pump allows consistent, high quality samples in all types of applications. It offers excellent performance and reliability. With Solinst Bladder Pumps there is the assurance that there is no air/water contact during sampling. It meets the most rigorous US EPA standards for VOC groundwater monitoring.

The bladder ensures that drive air or gas does not contact the sample, thus avoiding degassing or contamination of the sample. Solinst Bladder Pumps are rugged and long lasting. PTFE bladders are ideal for dedication, while less expensive polyethylene bladders are available for those that prefer to change bladders after each use. Bladders and intake filters are easily replaced in the field in just a few minutes. No special tools required.

Excellent for either regular flow or low flow sampling, the stainless steel pumps can lift from depths up to 150 m (500 ft) below grade.

Low Flow Purge and Sampling

Low flow sampling offers excellent quality samples by reducing turbulence. It also reduces purge volumes, and thus sampling time and disposal costs. When using a Solinst Model 464 Electronic Pump Control Unit, the Solinst Bladder Pump can be adjusted to provide continuous output of 100 ml/min. or less.

Use of a Flow-Through Cell System during low flow sampling, allows the continuous analysis of purge water, in-line, as it flows, so that sampling can begin as soon as the readings stabilize.

Packers are also available to further reduce purge volumes and to speed sampling times.

Features

Stainless Steel: 1.66" Ø (42 mm) and 1" Ø (25 mm) with 316 stainless steel body.

Non-Vertical Applications: Pumps operate effectively at almost any angle and can be placed under landfills, tailings, storage tanks or contaminant plumes.

Leachate/Product Pumping: Pneumatic drive pumps are well suited for pumping contaminant liquids. Strong solvents and corrosive chemicals can be easily and economically pumped.

Survives Dry Pumping, Dirty Air and Sand: Solinst bladders are not damaged by operation in sediment laden water, or in dry pumping conditions.

Freeze Protection Kit: Optional accessory available to prevent freezing in the sample line.

Benefits

High Quality Samples: Consistently accurate samples with excellent VOC sample integrity.

Simplicity: The controller, air compressor and flow-through cell can be easily transported by one person to any site. Hookup to the pump is by compression fittings.

Cost Savings: Reduced need for repeat sampling and shorter time required for each sampling round. Low purge volumes ensure rapid sampling.

Bladders: Durable PFAS-free PTFE bladders are ideal for dedication. Inexpensive polyethylene is also available.

The Solinst Bladder Pump

Solinst Bladder Pumps are manufactured from 316 stainless steel and have PTFE check balls. The bladder most frequently used is PTFE, however polyethylene bladders are also available. This is the ideal sampling pump for most types of municipal, industrial and general environmental applications, especially where VOC analysis of the sample is important.

The pump body of the standard Solinst Bladder Pump is a convenient 1.66" dia. (42 mm) and comes in lengths of 2 ft and 4 ft (0.6 m and 1.2 m). 1" dia. (25 mm) bladder pumps are also available for narrower applications and for use in the Waterloo Multilevel System. (See Model 401 Data Sheet.)

Portable Bladder Pumps

For less frequent sampling, and to allow access to multiple monitoring wells, even in remote locations, portable bladder pump systems are available.

They are supplied on a free-standing reel. The rugged systems are very convenient and easy to transport. Tubing fittings on the reels and controller are compression fittings, allowing quick set up in the field. The Solinst Model 103 Tag Line can be used to lower and support the pump in the well (see Model 103 Data Sheet).



1" (25 mm) Stainless Steel Bladder Pump on Free-standing Reel

Dedicated Well Caps

The caps slip easily onto 2" dia. (50 mm) wells. Adaptors to fit 4" dia. (100 mm) wells are also available. They have quick-connect fittings for the drive and sample tubing.

Well Caps for Dedicated Pumps



Solinst Bladder Pumps available in Stainless Steel 1" and 1.66" (25 mm and 42 mm).

Dedicated Systems

For long term monitoring it is always best to dedicate bladder pumps. This avoids cross-contamination and saves time without the need to decontaminate between sampling events. There is the assurance of no air/water contact during sampling, and the confidence that no cross-contamination will occur from the use of portable equipment.

Solinst well caps are designed for ease of use. The vented caps have a quick-connect attachment for the controller unit/air supply. Fittings are provided for both 1/4" OD (6 mm) and 3/8" OD (9 mm) tubing. Each cap comes with a 3 ft (0.9 m) length of discharge line, which is easily replaced, as required.

For water level monitoring there is an access hole to fit a Solinst Model 101 Water Level Meter or Levellogger. An eyebolt is provided for a pump support cable or for suspension of a Solinst Levellogger, (see Model 3001 Data Sheet) or other device.



Sampling with a Dedicated Bladder Pump using Portable, Rugged, Easy-to-use, Compressor and Controller

Use Without the Bladder

An advantage of the Bladder Pump is the ability to also be able to use it with no bladder. This allows you to continue sampling if you are in the field with no bladder replacements. Simply operate it like a Double Valve Pump (DVP).

Pump Controllers

The Model 464 Electronic Pump Control Unit is available in 125 psi or 250 psi versions, and uses 4 AA alkaline batteries that last up to 100 hours of normal use. These Controllers can also be operated manually if your batteries run out in the field, using only a compressed gas source. It has automatic preset sample modes from low through high flow settings. In addition, up to 99 user-created flow rates can be saved in FRAM memory. The Controller allows faster purge rates and precise low flow control to ensure a representative sample at 100 ml/min or less when sampling for VOCs.

These convenient Controllers are rugged, dependable and suitable for all environments. Quick-connect fittings allow instant attachment to dedicated well caps, portable reel units and to an air compressor or compressed gas source.



Model 464 Electronic Control Unit
(125 psi and 250 psi Models)

12V Oil-Less Air Compressor

The Solinst 12 Volt Compressor is lightweight 21 lbs (9.5 kg), compact, and ideal for field use, especially low flow applications of less than 30 m (100 ft) depths.

The compressor operates using 12 volt DC power source, such as a car or truck vehicle battery, and comes with alligator clips. The compressor operates at up to 125 psi and is equipped with a 2 US gallon (7.6 L) air tank which is rated to 150 psi.



12 Volt Compressor

Easy Decon or Disposable Polyethylene

Solinst Bladder Pumps are easy to decontaminate. Everything is very accessible. The tubing may simply be flushed or it is easily replaced.

The pump is quick to disassemble and the bladders and screens are simple to replace in the field. No tools required. Inexpensive polyethylene bladders can be quickly replaced to suit regulatory requirements.

Tubing

The standard tubing is 1/4" (6 mm) single line or 1/4" (6 mm) OD dual skip-bonded LDPE. PTFE-lined LDPE and other tubing sizes are also available.

Solinst provides dedicated systems with individual drive and sample lines so that the cost of replacing the sample line is minimized. Portable systems are provided with 1/4" (6 mm) dual skip-bonded tubing for ease of operation.


Filters and Packers

Stainless Steel Bladder Pumps come complete with a 50 mesh intake filter over the sample inlet. These filters are very easy to replace. If required, Solinst also supplies Model 860 Disposable In-line Filters which are used on the sample discharge tube. They are adaptable to fit many sizes of tubing. (See Model 860 Data Sheet.)

Model 800 Low-Pressure Packers can be used with Solinst Bladder Pumps to minimize purge times by reducing purge volumes. This reduces the cost of water disposal and labour. Packers are available in single point or straddle packer designs, and in sizes to fit 2" (50 mm) to 5" (127 mm) dia. wells. (See Model 800 Data Sheet.)



Model 800 Packers
3.9" and 1.8" (99 mm and 46 mm)

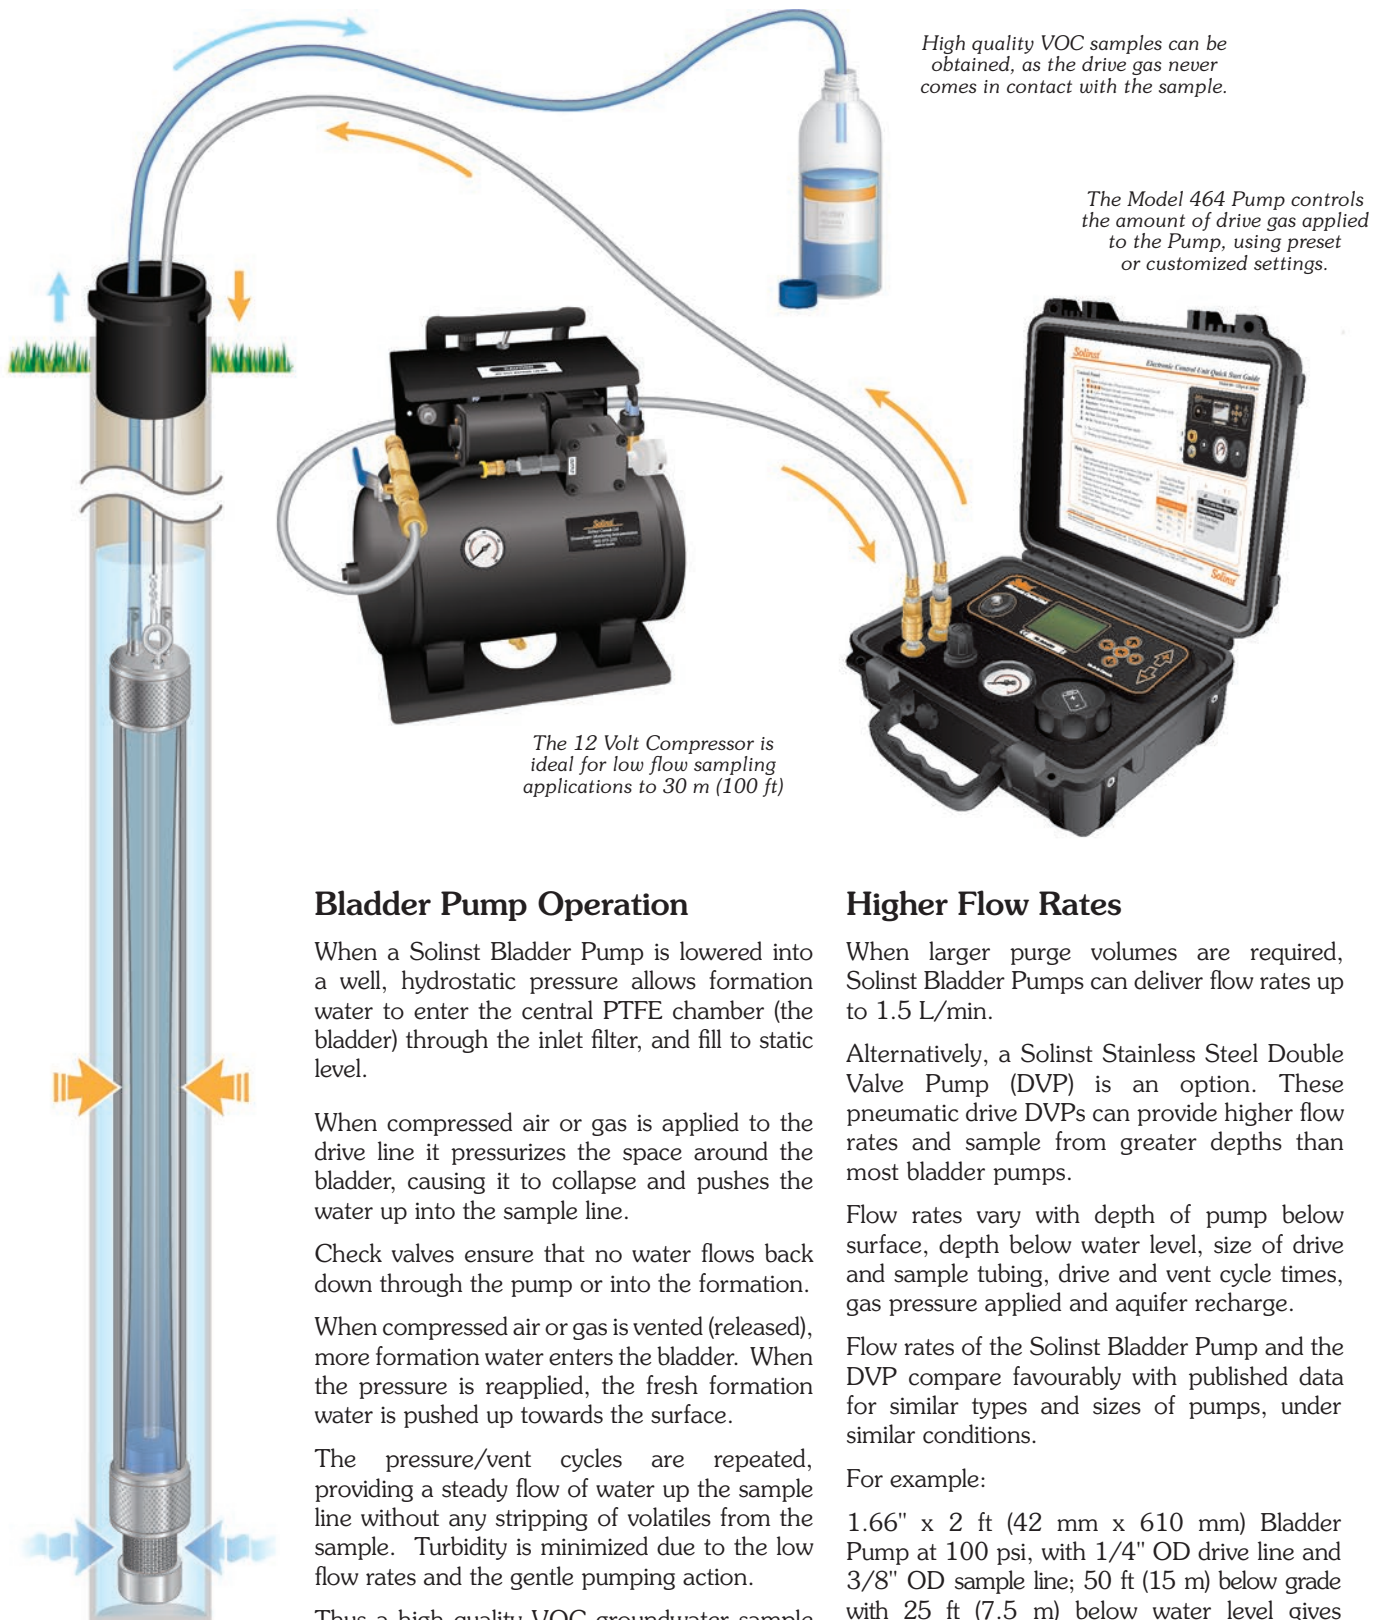

Bladder Pump Operation

When a Solinst Bladder Pump is lowered into a well, hydrostatic pressure allows formation water to enter the central PTFE chamber (the bladder) through the inlet filter, and fill to static level.

When compressed air or gas is applied to the drive line it pressurizes the space around the bladder, causing it to collapse and pushes the water up into the sample line.

Check valves ensure that no water flows back down through the pump or into the formation.

When compressed air or gas is vented (released), more formation water enters the bladder. When the pressure is reapplied, the fresh formation water is pushed up towards the surface.

The pressure/vent cycles are repeated, providing a steady flow of water up the sample line without any stripping of volatiles from the sample. Turbidity is minimized due to the low flow rates and the gentle pumping action.

Thus a high quality VOC groundwater sample is obtained.

Higher Flow Rates

When larger purge volumes are required, Solinst Bladder Pumps can deliver flow rates up to 1.5 L/min.

Alternatively, a Solinst Stainless Steel Double Valve Pump (DVP) is an option. These pneumatic drive DVPs can provide higher flow rates and sample from greater depths than most bladder pumps.

Flow rates vary with depth of pump below surface, depth below water level, size of drive and sample tubing, drive and vent cycle times, gas pressure applied and aquifer recharge.

Flow rates of the Solinst Bladder Pump and the DVP compare favourably with published data for similar types and sizes of pumps, under similar conditions.

For example:

1.66" x 2 ft (42 mm x 610 mm) Bladder Pump at 100 psi, with 1/4" OD drive line and 3/8" OD sample line; 50 ft (15 m) below grade with 25 ft (7.5 m) below water level gives 1.5 L/min.

Solinst Canada Ltd.

35 Todd Road, Georgetown, ON
Canada L7G 4R8

Tel: (905) 873-2255; (800) 661-2023
Fax: (905) 873-1992; (800) 516-9081

E-mail: instruments@solinst.com
Web: www.solinst.com

July 30th, 2019

To Whom It May Concern:

Solinst PTFE Bladder Supplier Statement Regarding PFAS PFOS

Our PTFE Bladder Supplier writes:

Hi Catherine,


Per our resin manufacturers and Division Engineering Manager, our fluoropolymer resins are compliant to be free of PFOA and we do not add PFOA to our manufacturing processes.

All the best,

Tina Wick | Plant Quality Manager, SSBB
Parker Hannifin Corporation | Parflex Division
Direct 817-984-0162 | Mobile 216-218-6904
4700 Lone Star Blvd | Fort Worth, TX 76106
tina.wick@parker.com

Should you have any questions in this regard, please feel free to contact Solinst Canada Ltd.

Issued by Manufacturer,
SOLINST CANADA LTD.,



B. Randy Blackburn,
Product Manager.